New Products 2022

NEKO LIGHTING AG

Kreuzstrasse 2
CH-8008 Zürich / Switzerland
+41 44 451 80 15
sales@nekolighting.com
www.nekolighting.com

2022.01

neko

THINK DESIGN

www.nekolighting.com

INDEX

SKYJACK Series

SKYJACK A68
■003-004

SKYJACK D
■005-006

SKYJACK F
■007

SKYJACK A145
■008

SLIM 40 Series

SLIM 40-F
■011

SLIM 40-A
■012

SKY Family Ceiling Light

SKYDRIVER SDRC
■015

SKYDRIVER SDSC
■016

SKYJOY Single SJSC
■017-018

SKYJOY Double SJDC
■019-020

SKYLINE SL5C
■021

SKYSURFER SSRC
■022

BREEZE Series

BREEZE Single
■026

BREEZE Double
■027

BREEZE Triple
■028

GINGER & PEPPER Series

GINGER 400
■031-032

GINGER 600
■033-034

PEPPER 400
■035-036

KOI Series

Small KOI
■039-040

Large KOI
■041-42

INLINE Series

INLINE ST
■047

INLINE SP
■048

neko LIGHTING

Classic

SKYJACK A68 SJA1-9W

Recessed Architectural

SKYJACK D SJD-9W

IP65

SKYJACK F SJF-9W

Shop & Corridors

SKYJACK A145 SJA2-25W

NEKO / SKYJACK

LED Downlight

NEKO / SKYJACK A68

LED Downlight
Incl. Phase Dim Driver & Fast Connection Junction Box

9W | CRI90 | 2700K 3000K | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJA1-9273809P-WW
					3000K	38°	950lm	750lm	SJA1-9303809P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJA1-9273809P-BB
					3000K	38°	950lm	750lm	SJA1-9303809P-BB

Code Remark: P=Phase Dim

Light Distribution

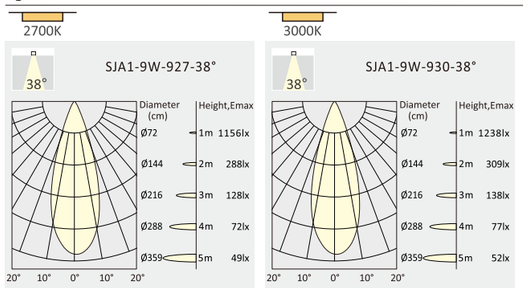

6W | CRI90 | 1800K-3000K Dim to Warm | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.450lm	SJA1-9D33806P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.450lm	SJA1-9D33806P-BB

Code Remark: P=Phase Dim

Light Distribution



DIM to WARM

NEKO / SKYJACK D

LED Downlight
Incl. Phase Dim Driver & Fast Connection Junction Box

9W | CRI90 | 2700K 3000K | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | UGR <19 | IP44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	700lm	SJD-9273809P-WW
					3000K	38°	950lm	750lm	SJD-9303809P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	650lm	SJD-9273809P-BB
					3000K	38°	950lm	700lm	SJD-9303809P-BB

Code Remark: P=Phase Dim

Light Distribution

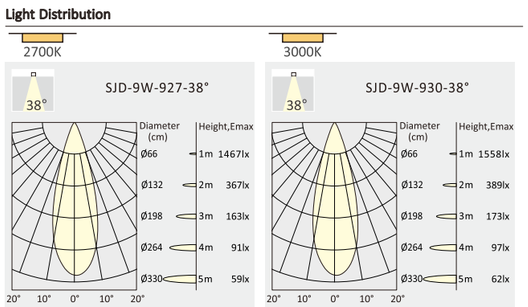

6W | CRI90 | 1800K-3000K Dim to Warm | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.450lm	SJD-9D33806P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.400lm	SJD-9D33806P-BB

Code Remark: P=Phase Dim

Light Distribution



NEKO / SKYJACK F

LED Downlight
Incl. Phase Dim Driver & Fast Connection Junction Box

9W | CRI90 | 2700K 3000K | 38° | bridgelux 50,000h@L80B10 | IP65 FRONT | 5 YEARS GUARANTEE | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJF-9273809P-WW
					3000K	38°	950lm	750lm	SJF-9303809P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJF-9273809P-BB
					3000K	38°	950lm	750lm	SJF-9303809P-BB

Code Remark: P=Phase Dim

Light Distribution

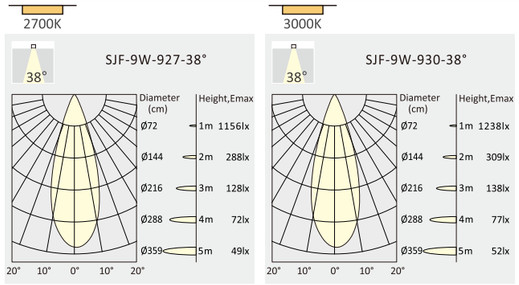

NEKO / SKYJACK A145

LED Downlight

25W | CRI90 | 3000K | 30° | ±30° Tiltable | bridgelux 50,000h@L80B10 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Light Distribution



Slim & Powerful & IP54

SLIM 40-F-7.5W

Slim & Powerful & IP54

SLIM 40-A-7.5W

NEKO / SLIM 40

LED Downlight

NEKO / SLIM 40-F

LED Downlight

7.5W | CRI90 | 3000K | 30° | bridgelux 50,000h@L80B10 | UGR <19 | IP54 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	36 V	200 mA	90	3000K	30°	700lm	500lm	SM4F-9303008N-WC

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	36 V	200 mA	90	3000K	30°	700lm	500lm	SM4F-9303008N-BC

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Light Distribution



NEKO / SLIM 40-A

LED Downlight

7.5W | CRI90 | 3000K | 30° | 25° Tiltable | bridgelux 50,000h@L80B10 | UGR <19 | IP54 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	36 V	200 mA	90	3000K	30°	700lm	500lm	SM4A-9303008N-WC

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	36 V	200 mA	90	3000K	30°	700lm	500lm	SM4A-9303008N-BC

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Light Distribution



SKYDRIVER SDRC-10W

SKYDRIVER SDSC-10W

SKYJOY Single SJSC-8W

SKYJOY Double SJDC-16W

SKYLINE SL5C-10W

SKYSURFER SSRC-10W

NEKO / SKY Family

LED Ceiling Light

NEKO / SKYDRIVER SDRC

LED Ceiling Light
Incl. Phase Dim Driver

10W | CRI90 | 2700K 3000K | 36° | CITIZEN 50,000h@L80B10 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-WW
					3000K	36°	1000lm	780lm	SDRC-9303610P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-BB
					3000K	36°	1000lm	780lm	SDRC-9303610P-BB

Code Remark: P=Phase Dim

Feature

25°Tiltable and 355° Rotation

Light Distribution

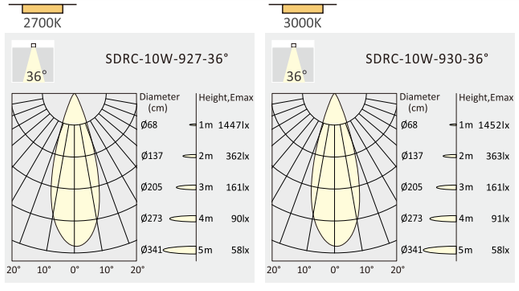

NEKO / SKYDRIVER SDSC

LED Ceiling Light
Incl. Phase Dim Driver

10W | CRI90 | 2700K 3000K | 36° | CITIZEN 50,000h@L80B10 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-WW
					3000K	36°	1000lm	780lm	SDSC-9303610P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-BB
					3000K	36°	1000lm	780lm	SDSC-9303610P-BB

Code Remark: P=Phase Dim

Feature

25°Tiltable and 355° Rotation

Light Distribution

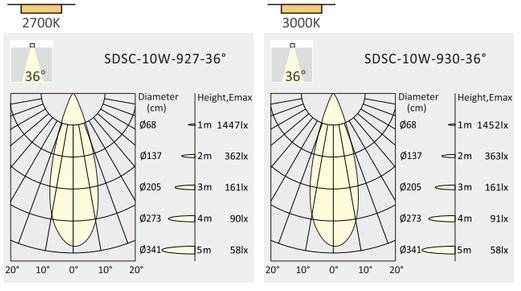

NEKO / SKYJOY Single SJSC

LED Ceiling Light
Incl. Phase Dim Driver

8W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B10 | UGR <19 | IP20 | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	8 W	35 V	200 mA	90	2700K	36°	750lm	580lm	SJSC-9273608P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	8 W	35 V	200 mA	90	2700K	36°	750lm	580lm	SJSC-9273608P-BB

Code Remark: P=Phase Dim

Feature



Tilt 25° in all direction (360°)

Light Distribution



10W | CRI90 | 1800K-3000K Dim to Warm | 36° | bridgelux 50,000h@L80B10 | UGR <19 | IP20 | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	10 W	35 V	250 mA	90	1800K-3000K	36°	850lm	Max.650lm	SJSC-9D33610P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	10 W	35 V	250 mA	90	1800K-3000K	36°	850lm	Max.650lm	SJSC-9D33610P-BB

Code Remark: P=Phase Dim

Feature



Tilt 25° in all direction (360°)

Light Distribution



DIM to WARM

NEKO / SKYJOY Double SJDC

LED Ceiling Light
Incl. Phase Dim Driver

16W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B10 | UGR <19 | IP20 | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
14 W	16 W	35 V	400 mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-WW

Code Remark: P=Phase Dim



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
14 W	16 W	35 V	400 mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-BB

Code Remark: P=Phase Dim

Feature



Tilt 25° in all direction (360°)

Light Distribution



20W | CRI90 | 1800K-3000K Dim to Warm | 36° | bridgelux 50,000h@L80B10 | UGR <19 | IP20 | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	35 V	500 mA	90	1800K-3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-WW

Code Remark: P=Phase Dim



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	35 V	500 mA	90	1800K-3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-BB

Code Remark: P=Phase Dim

Feature



Tilt 25° in all direction (360°)

Light Distribution



DIM to WARM

NEKO / SKYLINE SL5C

LED Ceiling Light
Incl. Phase Dim Driver

8.5W | CRI90 | 2700K 3000K | 30° | CREE 50,000h@L80B10 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	14.5 V	600 mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-WS
					3000K	30°	1000lm	750lm	SL5C-9303010P-WS

Code Remark: P=Phase Dim

8.5 W	10 W	14.5 V	600 mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-BS
					3000K	30°	1000lm	750lm	SL5C-9303010P-BS

Code Remark: P=Phase Dim

Light Distribution

2700K



3000K



NEKO / SKYSURFER SSRC

IP65 LED Ceiling Light
Only ON-OFF Driver

10W | CRI90 | 3000K | 36° | CITIZEN 50,000h@L80B10 | UGR <19 | IP65 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	3000K	36°	1000lm	850lm	SSRC-9303610F-BN

Code Remark: F=F(ON-OFF)

Light Distribution



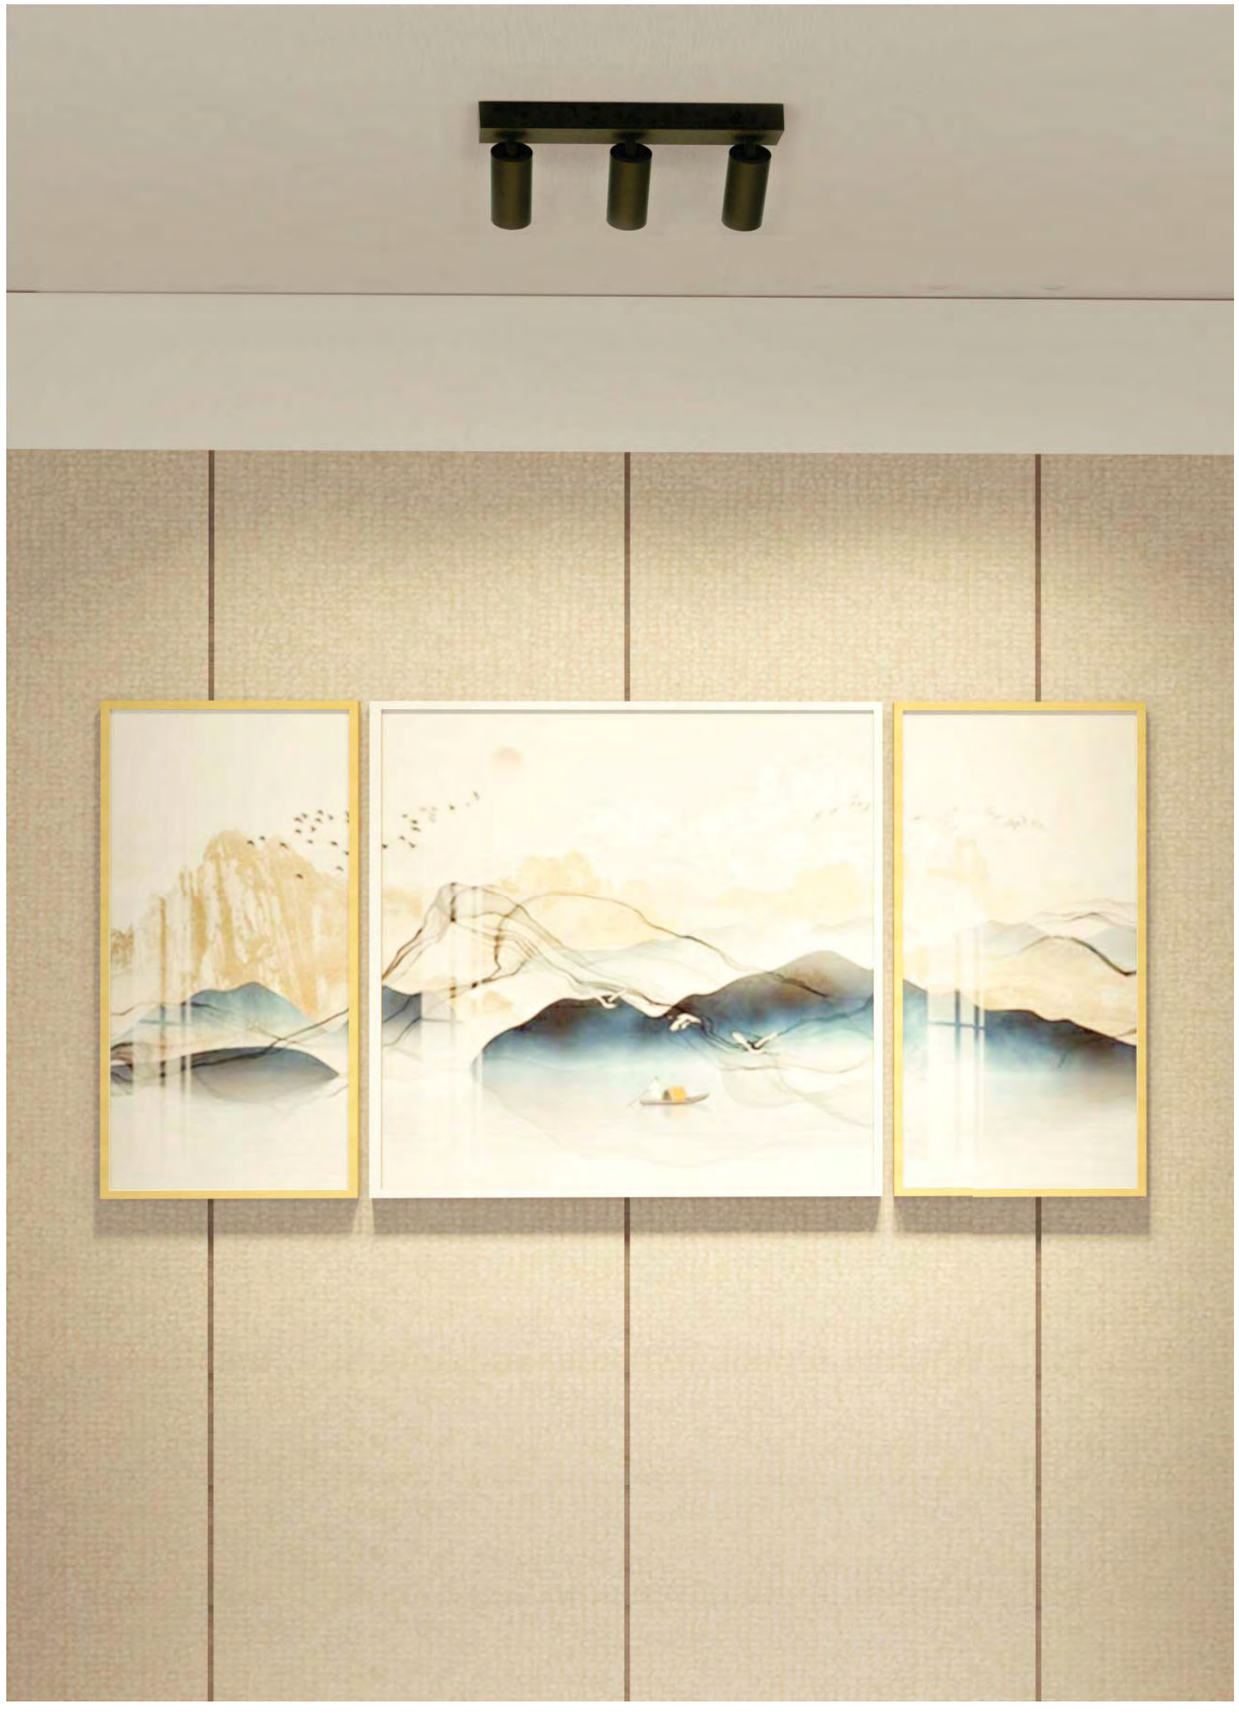

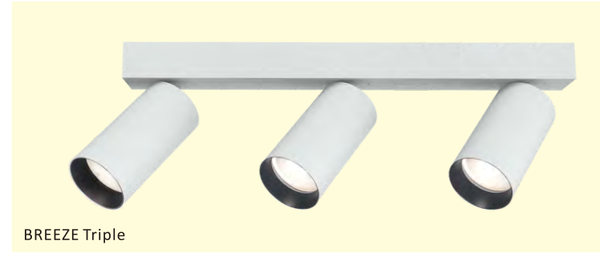

NEKO / BREEZE

Ceiling Mounted Spotlight

NEKO / BREEZE
Ceiling Mounted Spotlight

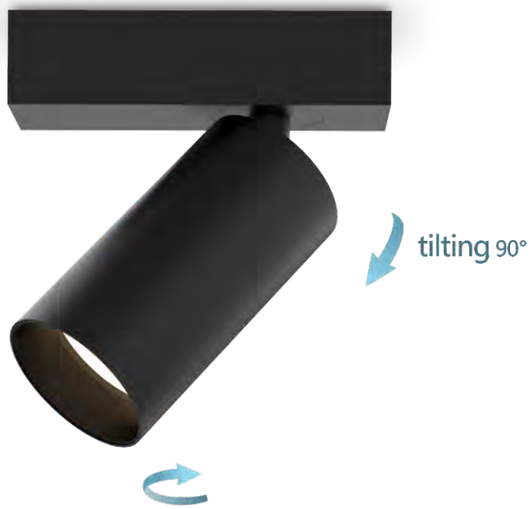

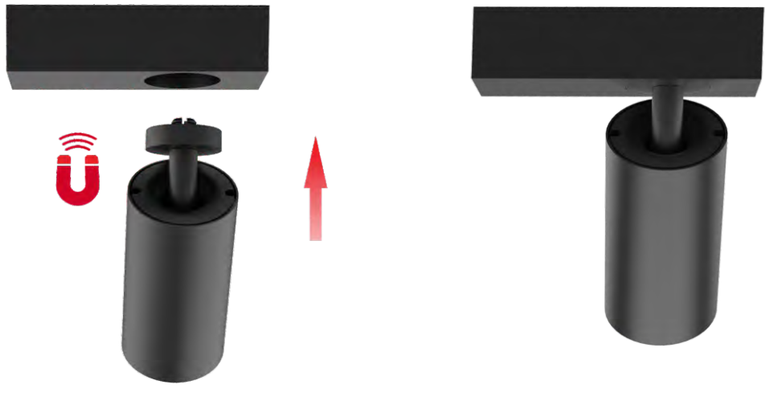

NEKO / BREEZE Single
Ceiling Mounted Spotlight
Incl. Phase Dim Driver

9W | CRI90 | 2700K | 36° | bridgelux 50,000h@L80B10 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-WB

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-BB

Code Remark: P=Phase Dim

Light Distribution



NEKO / BREEZE Double

Ceiling Mounted Spotlight
Incl. Phase Dim Driver

2x9W | CRI90 | 2700K | 36° | bridgelux 50,000h@L80B10 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x7 W	2x9 W	36 V	2x200 mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-WB

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x7 W	2x9 W	36 V	2x200 mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-BB

Code Remark: P=Phase Dim

Light Distribution



NEKO / BREEZE Triple

Ceiling Mounted Spotlight
Incl. Phase Dim Driver

3x9W | CRI90 | 2700K | 36° | bridgelux 50,000h@L80B10 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3x7 W	3x9 W	36 V	3x200 mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-WB

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3x7 W	3x9 W	36 V	3x200 mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-BB

Code Remark: P=Phase Dim

Light Distribution



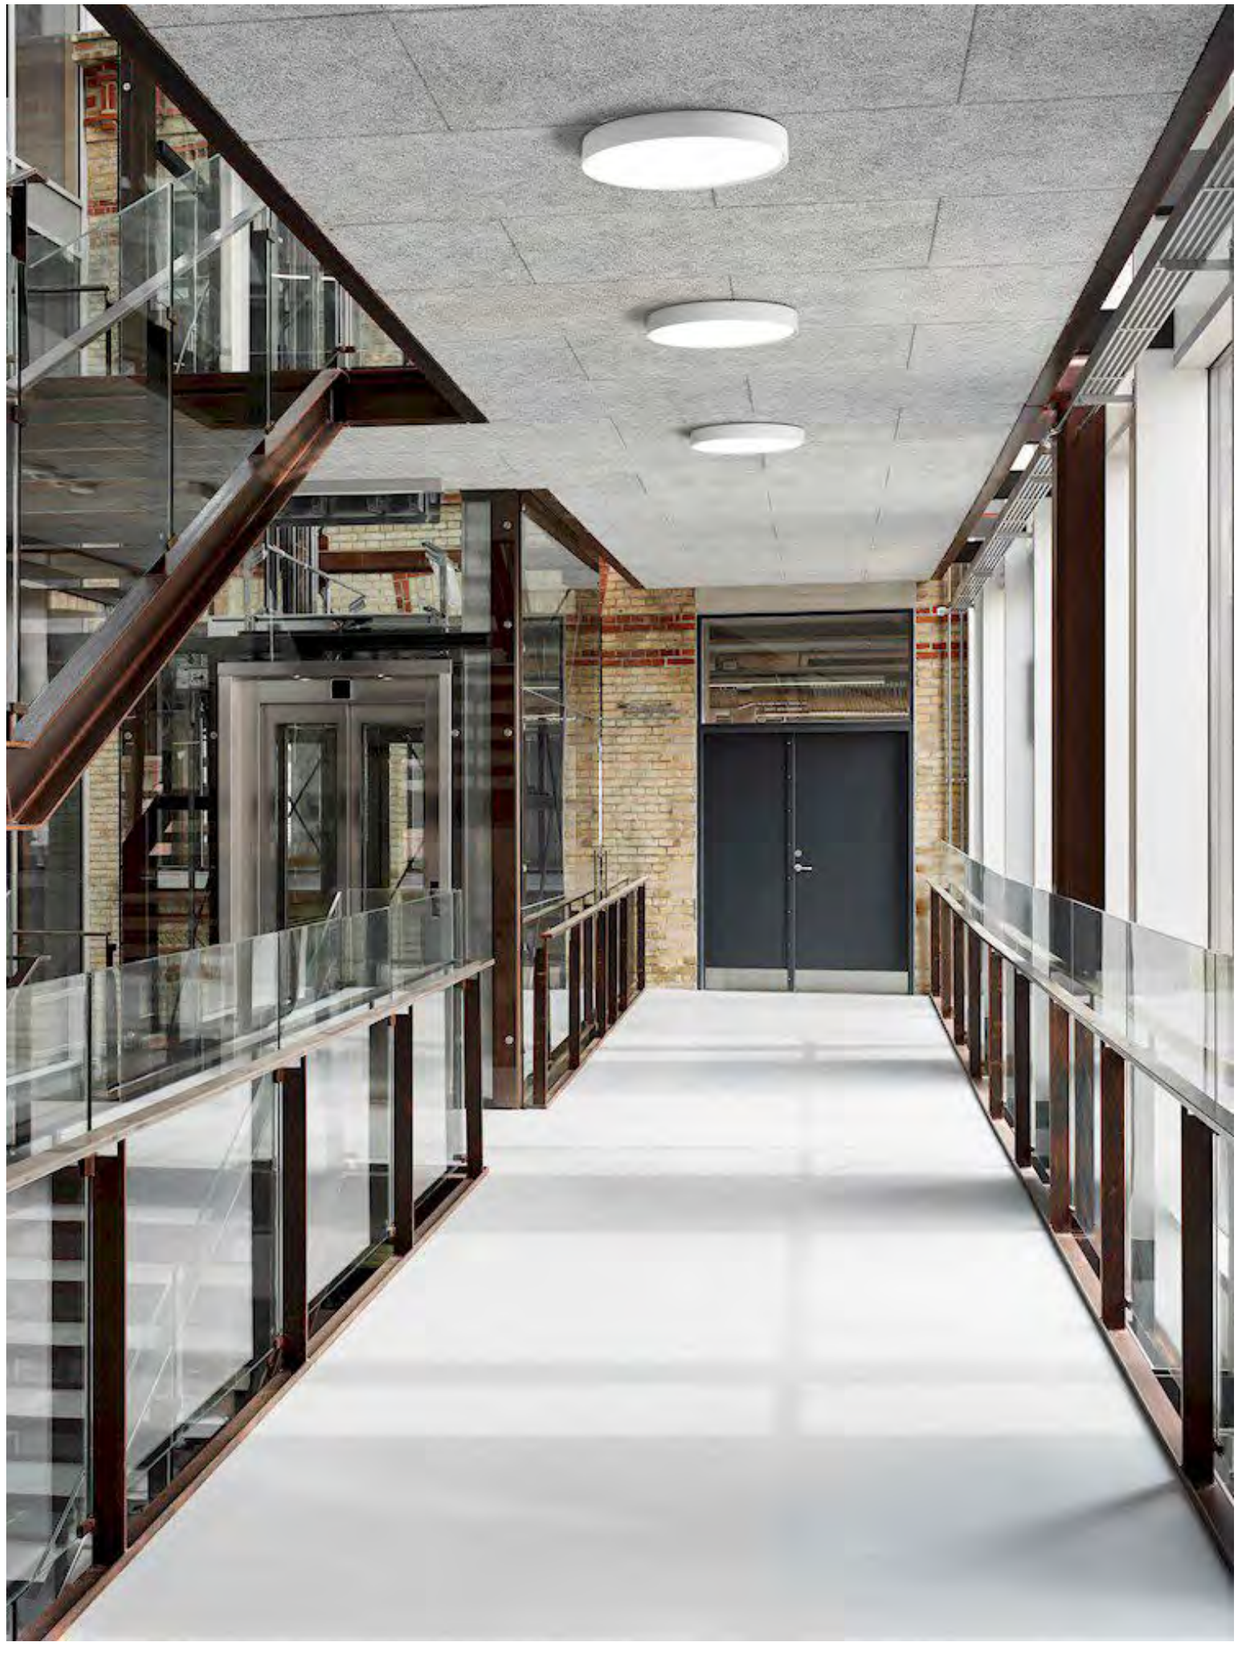



GINGER 400 G4RC-30W

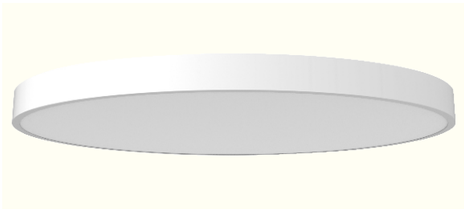

GINGER 600 G6RC-50W

PEPPER 400 P4SC-30W

NEKO / GINGER & PEPPER

LED Ceiling Light

Aluminum Frame & Homogen Light
CCT Switchable 3000K/ 3500K/ 4000K
Phase Dim and IP44
Microwave Sensor Version Available

NEKO / GINGER 400

LED Ceiling Light
Incl. Phase Dim Driver

30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130P-WN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130P-WN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130P-WN

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130P-BN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130P-BN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130P-BN

Code Remark: P=Phase Dim

Light Distribution



NEKO / GINGER 400

LED Ceiling Light
ON-OFF Driver+Microwave Sensor

30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130S-WN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130S-WN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130S-WN

Code Remark: S=On-Off LED Driver+Microwave Sensor

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130S-BN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130S-BN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130S-BN

Code Remark: S=On-Off LED Driver+Microwave Sensor

Light Distribution



NEKO / GINGER 600

LED Ceiling Light
Incl. Phase Dim Driver

50W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
46 W	50 W	95 V	480 mA	90	3000K	110°	5000lm	4000lm	G6RC-9S3A150P-WN
					3500K	110°	5200lm	4200lm	G6RC-9S3A150P-WN
					4000K	110°	5100lm	4000lm	G6RC-9S3A150P-WN

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
46 W	50 W	95 V	480 mA	90	3000K	110°	5000lm	4000lm	G6RC-9S3A150P-BN
					3500K	110°	5200lm	4200lm	G6RC-9S3A150P-BN
					4000K	110°	5100lm	4000lm	G6RC-9S3A150P-BN

Code Remark: P=Phase Dim

Light Distribution



NEKO / PEPPER 400

LED Ceiling Light
Incl. Phase Dim Driver

30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-WN

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-BN

Code Remark: P=Phase Dim

Light Distribution



NEKO / PEPPER 400

LED Ceiling Light
ON-OFF Driver+Microwave Sensor

30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-WN

Code Remark: S=On-Off LED Driver+Microwave Sensor

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-BN

Code Remark: S=On-Off LED Driver+Microwave Sensor

Light Distribution



Small KOI SKOI-5W

Large KOI LKOI-18W

NEKO / KOI

LED Wall Light

No Visible Screws
Slim Architectural Design
Incl. Phase Dim Driver

NEKO / Small KOI

LED Wall Light

5W | CRI90 | 3000K | ZIGEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
5 W	7 W	9 V	500 mA	90	3000K	Up & Down	600lm	450lm	SKOI-930UD05F-WW

Code Remark: F=ON-OFF

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
5 W	7 W	9 V	500 mA	90	3000K	Up & Down	600lm	280lm	SKOI-930UD05F-BB

Code Remark: F=ON-OFF

9W | CRI90 | 3000K | 2000K-3000K Dim to Warm | ZIGEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2000K-3000K	Up & Down	950lm	650lm	SKOI-9D3UD09P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2000K-3000K	Up & Down	950lm	400lm	SKOI-9D3UD09P-BB

Code Remark: P=Phase Dim

DIM to WARM

NEKO / Large KOI

LED Wall Light

18W | CRI90 | 3000K | ZIGEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	90	3000K	30°	2100lm	1900lm	LKOI-930UD18P-WW

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	90	3000K	30°	2100lm	1300lm	LKOI-930UD18P-BB

Code Remark: P=Phase Dim

NEKO / INLINE

Single Phase LED Tracklight System

Incl. Phase Dim Driver
Direct Connection 230V – No External Driver

INLINE ST-11W
11W, 36°, 700lm at CRI>90 2700K

INLINE SP-8W
8W, 36°, 500lm at CRI>90 2700K

11W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B50 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	36°	900lm	700lm	ILST-9273611P-WB

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	36°	900lm	700lm	ILST-9273611P-BB

Code Remark: P=Phase Dim

Track System



Compatible with NEKO INLINE Single Circuit Track System

Light Distribution





8W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B50 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	2700K	36°	700lm	500lm	ILSP-9273608P-WB

Code Remark: P=Phase Dim

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	2700K	36°	700lm	500lm	ILSP-9273608P-BB

Code Remark: P=Phase Dim

Track System



Compatible with NEKO INLINE Single Circuit Track System

Light Distribution



NEKO / INLINE

Single Phase LED Tracklight System

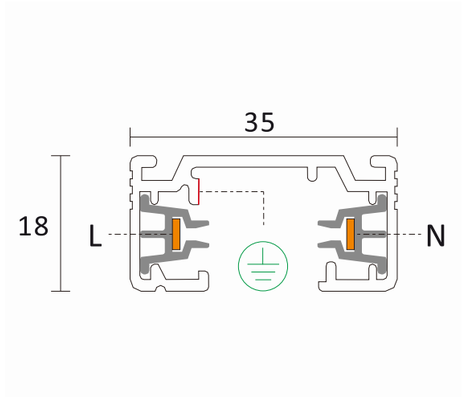

Quick Info

- Aluminum extrusion track shell
- 2 pieces copper busbars, insulated by plastic
- Single circuit track system for 16A (3500W) input
- Track length available in 1000mm and 2000mm
- Various connectors and accessories available for building comprehensive lighting system
- Color finish in White(RAL9003) or Black(RAL9005)
- Surface mounted

Load of Track



Connection Diagram

Example A:

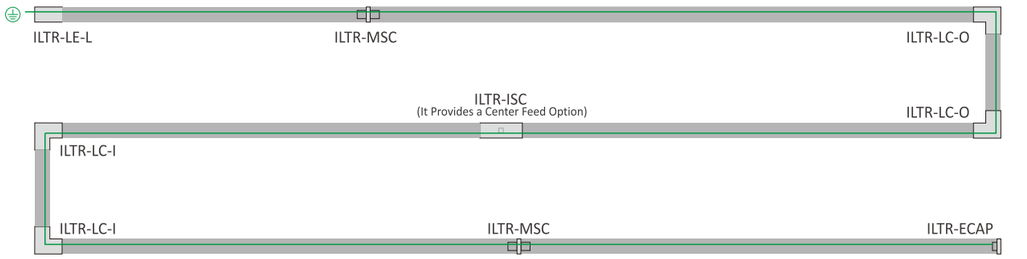

Example B:

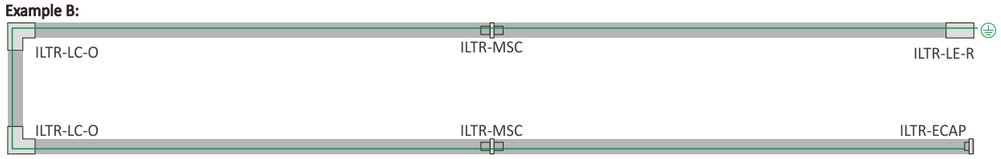



INLINE Single Phase Track

Description	Code/Model
INLINE Single Phase Track, 1000mm Length, White	ILTR-1000-FP-W
INLINE Single Phase Track, 1000mm Length, Black	ILTR-1000-FP-W
INLINE Single Phase Track, 2000mm Length, White	ILTR-2000-FP-W
INLINE Single Phase Track, 2000mm Length, Black	ILTR-2000-FP-B



Live End Connector

Description	Code/Model
Live End Connector, Left, White	ILTR-LE-L-W
Live End Connector, Left, Black	ILTR-LE-L-B
Live End Connector, Right, White	ILTR-LE-R-W
Live End Connector, Right, Black	ILTR-LE-R-B



I Straight Connector

Description	Code/Model
I Straight Connector, It Provides a Center Feed Option, White	ILTR-ISC-W
I Straight Connector, It Provides a Center Feed Option, Black	ILTR-ISC-B



L Connector

Description	Code/Model
L Connector, Outer, White	ILTR-LC-O-W
L Connector, Outer, Black	ILTR-LC-O-B
L Connector, Inner, White	ILTR-LC-I-W
L Connector, Inner, Black	ILTR-LC-I-B



Mini Straight Connector

Description	Code/Model
Mini Straight Connector, White	ILTR-MSC-W
Mini Straight Connector, Black	ILTR-MSC-B



Endcap

Description	Code/Model
Endcap, White	ILTR-ECAP-W
Endcap, Black	ILTR-ECAP-B

Be prepared for more!