


LED Downlight FUSION Series FW10-22W-840

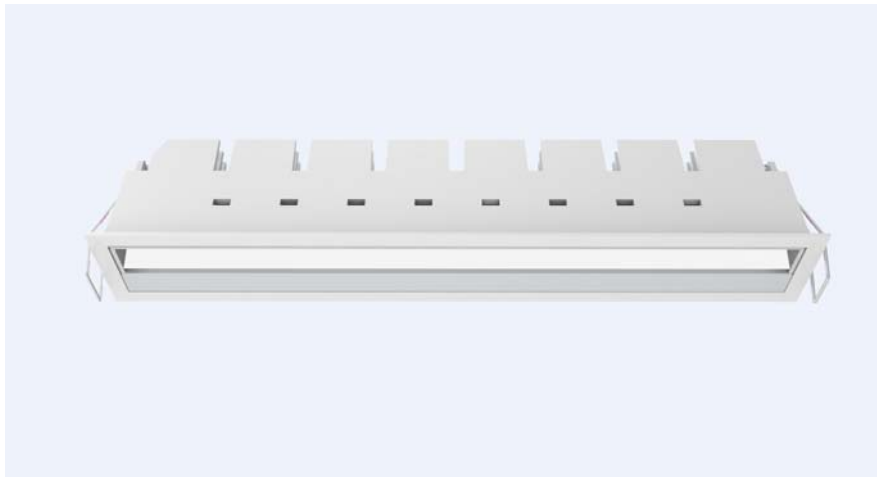

Light Output Ratio:	100.0%	
Luminaire Power:	22.63 W	
SHR Nominal:	1.25	Calculated using the TM5
SHR Maximum:	1.35	fine grid method.



C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Meng Yongjian
 Test Date: 2017-01-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity: 52%
 Test Distance: 5.850m [K=1.0000]
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.1082A P:22.63W PF:0.9501 Lamp Flux:1262.88x1 lm		
NAME: FW10-22W-840	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: L290mm*W45mm*H60mm	
MFR.: NEKO LIGHTING AG		

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 55.80 lm/W
MODEL	CREE-4000K	I _{max} (cd)	556.4	S/MH(C0/180)	0.78	
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.12	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1262.9	η UP, DN(C0-180)	0.0, 53.3	
NOMINAL FLUX(lm)	1262.88	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 46.7	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	1.35	

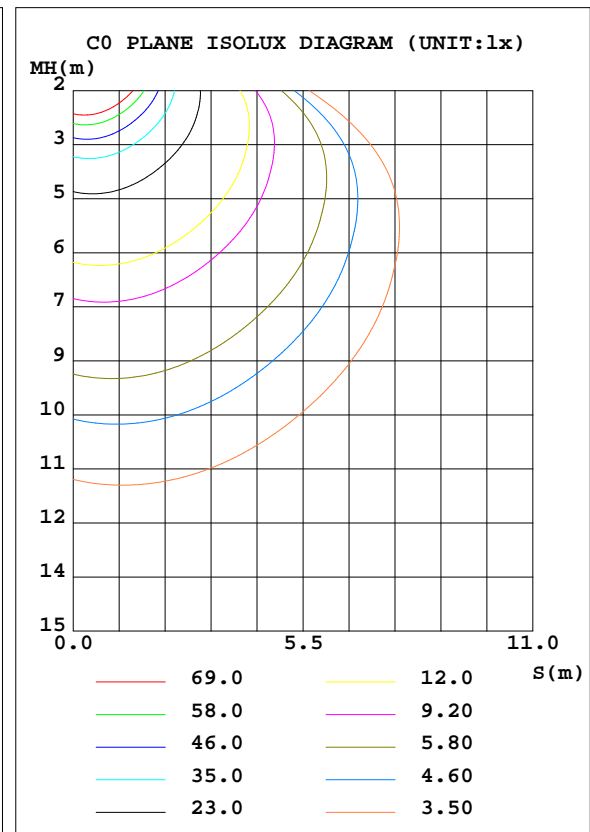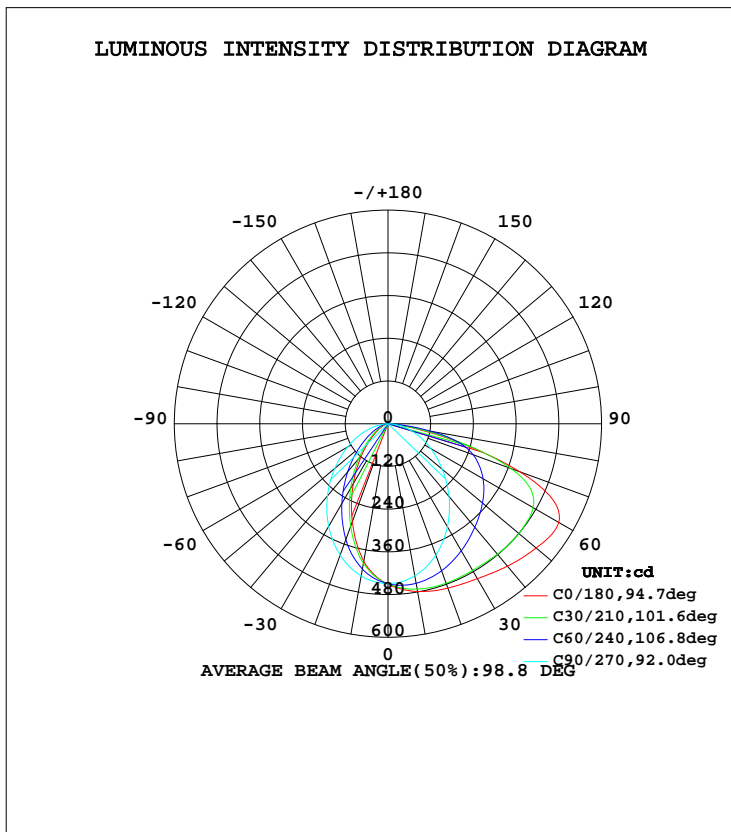


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Meng Yongjian
 Test Date:2017-01-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity:52%
 Test Distance:5.850m [K=1.0000]
 Remarks:

**ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES**

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	478.3	464.3	433.9	404.0	392.6	404.3	434.1	463.2	0- 10	42.17	42.17	3.34,3.34
20	491.3	460.5	392.8	323.0	293.3	321.9	392.8	459.4	10- 20	116.9	159.0	12.6,12.6
30	502.4	447.0	333.9	230.6	195.6	228.7	333.1	445.6	20- 30	168.6	327.6	25.9,25.9
40	522.2	432.3	266.7	148.2	114.9	146.2	264.9	430.1	30- 40	197.0	524.6	41.5,41.5
50	542.8	417.2	199.4	84.86	58.97	83.75	195.3	414.0	40- 50	208.5	733.1	58,58
60	553.9	390.3	137.9	43.71	27.17	42.55	131.4	385.6	50- 60	208.3	941.4	74.5,74.5
70	393.3	325.1	84.37	20.49	12.07	19.52	76.15	322.4	60- 70	189.7	1131	89.6,89.6
80	77.14	108.4	38.40	7.975	5.010	7.537	30.89	115.5	70- 80	112.2	1243	98.5,98.5
90	0.2055	0.5554	0.9795	0.9118	0.6822	0.7674	0.5969	0.3367	80- 90	19.57	1263	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

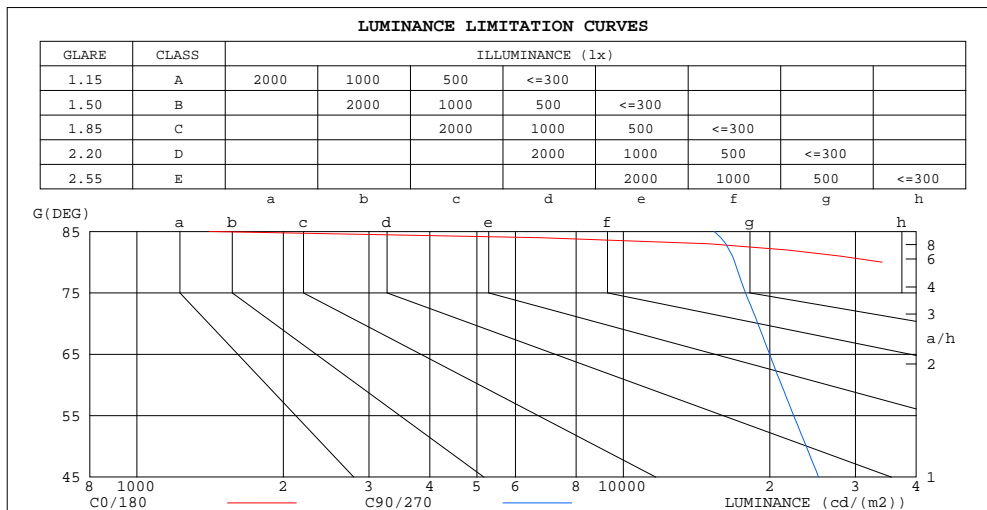

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1407	15377
80	34039	16943
75	64090	17825
70	88123	18903
65	93173	19982
60	84886	21135
55	73976	22400
50	64708	23768
45	57759	25196


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Meng Yongjian
Test Date:2017-01-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity:52%
Test Distance:5.850m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.6V I:0.1082A P:22.63W PF:0.9501 Lamp Flux:1262.88x1 lm		
NAME: FW10-22W-840	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: L290mm*W45mm*H60mm	
MFR.: NEKO LIGHTING AG		

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.93	.90	.93	.90	.87	.89	.87	.85	.83
2.0	.89	.82	.76	.87	.81	.75	.84	.78	.73	.80	.76	.72	.77	.73	.70	.68
3.0	.78	.69	.62	.76	.68	.62	.73	.66	.61	.70	.64	.60	.68	.63	.59	.56
4.0	.69	.59	.52	.67	.59	.52	.65	.57	.51	.62	.56	.51	.60	.54	.50	.48
5.0	.61	.52	.45	.60	.51	.45	.58	.50	.44	.56	.49	.44	.54	.48	.43	.41
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.38	.50	.43	.38	.49	.43	.38	.36
7.0	.50	.41	.34	.49	.40	.34	.47	.40	.34	.46	.39	.34	.44	.38	.33	.31
8.0	.45	.37	.31	.45	.36	.31	.43	.36	.30	.42	.35	.30	.41	.35	.30	.28
9.0	.42	.33	.28	.41	.33	.27	.40	.32	.27	.39	.32	.27	.38	.32	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.35	.29	.25	.23

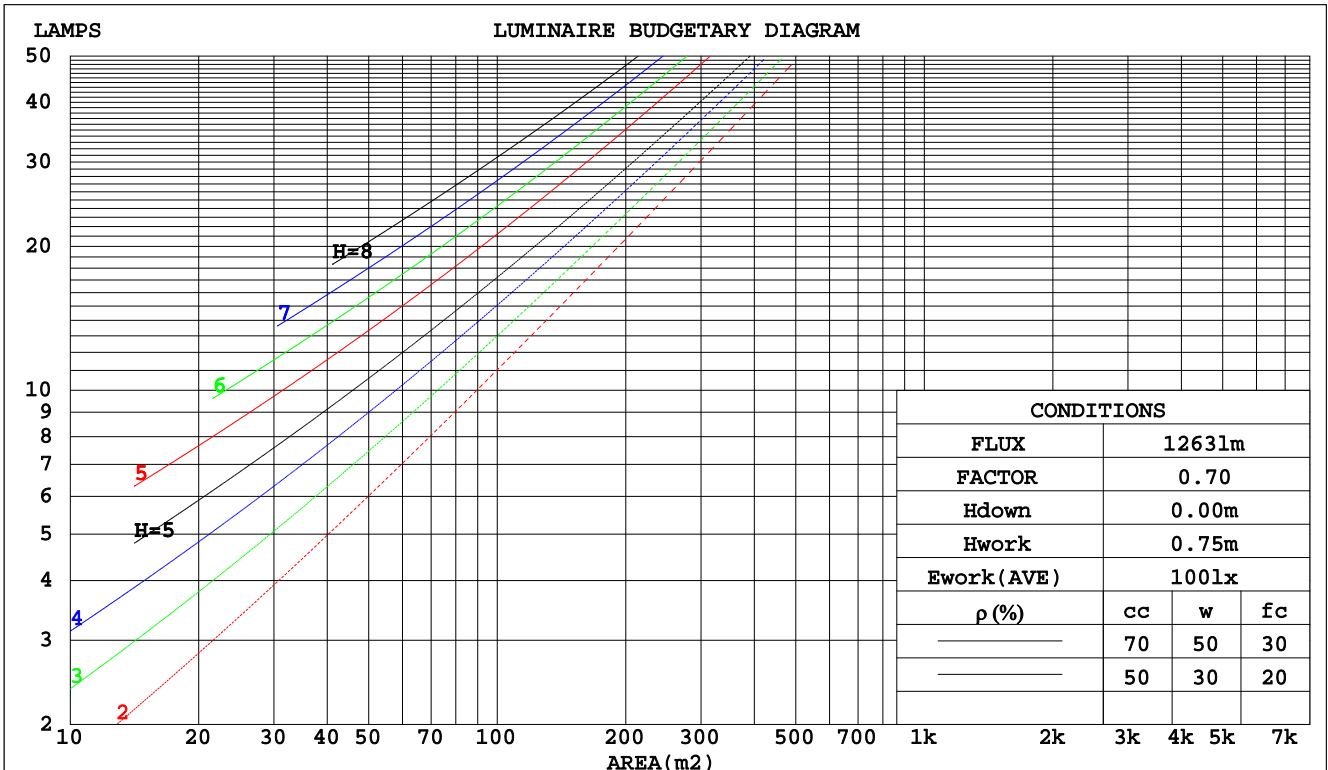

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Meng Yongjian
 Test Date: 2017-01-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity: 52%
 Test Distance: 5.850m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.6V I:0.1082A P:22.63W PF:0.9501 Lamp Flux:1262.88x1 lm		
NAME: FW10-22W-840	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: L290mm*W45mm*H60mm	
MFR.: NEKO LIGHTING AG		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.322	.183	.058	.315	.180	.057	.302	.173	.055	.290	.167	.054	.278	.161	.052	
2.0	.304	.167	.051	.298	.164	.051	.286	.159	.049	.275	.154	.048	.265	.150	.047	
3.0	.280	.149	.045	.275	.147	.044	.264	.143	.044	.255	.140	.043	.246	.136	.042	
4.0	.257	.134	.039	.253	.132	.039	.243	.129	.039	.235	.126	.038	.227	.123	.037	
5.0	.237	.121	.035	.233	.119	.035	.224	.117	.034	.217	.114	.034	.209	.112	.034	
6.0	.219	.110	.031	.215	.109	.031	.208	.106	.031	.201	.104	.031	.194	.102	.030	
7.0	.203	.100	.028	.200	.099	.028	.193	.098	.028	.187	.096	.028	.181	.094	.028	
8.0	.189	.092	.026	.186	.092	.026	.180	.090	.026	.175	.088	.026	.169	.087	.025	
9.0	.177	.085	.024	.174	.085	.024	.169	.083	.024	.164	.082	.023	.159	.081	.023	
10.0	.166	.080	.022	.163	.079	.022	.159	.078	.022	.154	.077	.022	.150	.075	.022	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.156	.133	.155	.134	.115	.106	.092	.079	.061	.053	.046	.020	.017	.015	
2.0	.174	.132	.097	.149	.113	.083	.102	.079	.058	.059	.046	.034	.019	.015	.011	
3.0	.166	.114	.073	.143	.099	.063	.098	.069	.044	.057	.040	.026	.018	.013	.009	
4.0	.159	.101	.057	.136	.087	.050	.094	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.151	.091	.046	.130	.079	.040	.090	.055	.028	.052	.032	.017	.017	.011	.006	
6.0	.144	.083	.038	.124	.071	.033	.085	.050	.024	.050	.029	.014	.016	.010	.005	
7.0	.137	.076	.033	.118	.066	.028	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.130	.070	.028	.112	.061	.025	.078	.043	.017	.045	.025	.010	.015	.008	.003	
9.0	.124	.065	.025	.107	.056	.022	.074	.040	.015	.043	.023	.009	.014	.008	.003	
10.0	.118	.061	.022	.102	.053	.019	.071	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Meng Yongjian
 Test Date:2017-01-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity:52%
 Test Distance:5.850m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.6V I:0.1082A P:22.63W PF:0.9501 Lamp Flux:1262.88x1 lm		
NAME: FW10-22W-840	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: L290mm*W45mm*H60mm	
MFR.: NEKO LIGHTING AG		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	30.7	32.3	31.0	32.5	32.7	26.1	27.7	26.4	27.9	28.1
3H	33.3	34.7	33.6	35.0	35.2	27.6	29.1	27.9	29.3	29.6
4H	33.9	35.3	34.2	35.5	35.8	28.2	29.6	28.6	29.9	30.1
6H	34.1	35.4	34.4	35.6	35.9	28.7	30.0	29.0	30.3	30.6
8H	34.0	35.3	34.4	35.6	35.9	28.8	30.1	29.2	30.4	30.7
12H	34.0	35.2	34.3	35.5	35.8	28.9	30.1	29.2	30.4	30.7
4H 2H	31.3	32.7	31.6	32.9	33.2	28.2	29.6	28.6	29.9	30.1
3H	34.0	35.2	34.4	35.5	35.8	30.1	31.3	30.4	31.6	31.9
4H	34.7	35.8	35.1	36.2	36.5	30.9	32.0	31.2	32.3	32.6
6H	35.0	36.0	35.4	36.3	36.7	31.5	32.5	31.9	32.8	33.2
8H	35.0	35.9	35.4	36.3	36.7	31.7	32.6	32.1	33.0	33.4
12H	34.9	35.8	35.4	36.2	36.6	31.8	32.6	32.2	33.0	33.4
8H 4H	34.9	35.9	35.4	36.2	36.6	31.8	32.7	32.2	33.1	33.5
6H	35.3	36.0	35.7	36.4	36.9	32.6	33.4	33.1	33.8	34.2
8H	35.3	36.0	35.7	36.4	36.8	32.9	33.6	33.4	34.0	34.5
12H	35.3	35.8	35.7	36.3	36.8	33.1	33.7	33.6	34.2	34.6
12H 4H	34.9	35.8	35.4	36.2	36.6	31.8	32.7	32.3	33.1	33.5
6H	35.3	36.0	35.7	36.4	36.8	32.7	33.4	33.2	33.8	34.3
8H	35.3	35.9	35.8	36.4	36.8	33.0	33.6	33.5	34.1	34.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.1 / - 0.3					+ 0.3 / - 0.4				
2.0H	+ 0.4 / - 0.5					+ 0.4 / - 0.7				

CIE Pub.117 Corrected 1263 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.8)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Meng Yongjian
 Test Date:2017-01-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity:52%
 Test Distance:5.850m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.6V I:0.1082A P:22.63W PF:0.9501 Lamp Flux:1262.88x1 lm		
NAME: FW10-22W-840	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: L290mm*W45mm*H60mm	
MFR.: NEKO LIGHTING AG		

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	65	53	46	63	53	46	39
1.00	74	62	55	73	62	55	71	63	54	47
1.25	81	70	63	80	69	62	77	68	61	54
1.50	86	76	69	85	75	68	82	73	67	59
2.00	94	84	78	92	83	77	88	81	75	67
2.50	98	90	83	96	88	82	92	85	80	72
3.00	101	94	88	99	93	87	95	90	85	76
4.00	106	100	95	103	98	93	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Meng Yongjian
 Test Date:2017-01-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity:52%
 Test Distance:5.850m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:220.6V I:0.1082A P:22.63W PF:0.9501 Lamp Flux:1262.88x1 lm		
NAME: FW10-22W-840	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: L290mm*W45mm*H60mm	
MFR.: NEKO LIGHTING AG		

Conical surface Flux(90deg):

628.26 lm
%lum = 49.7%
%lamp = 49.7%

Conical surface Flux(120deg):

941.39 lm
%lum = 74.5%
%lamp = 74.5%

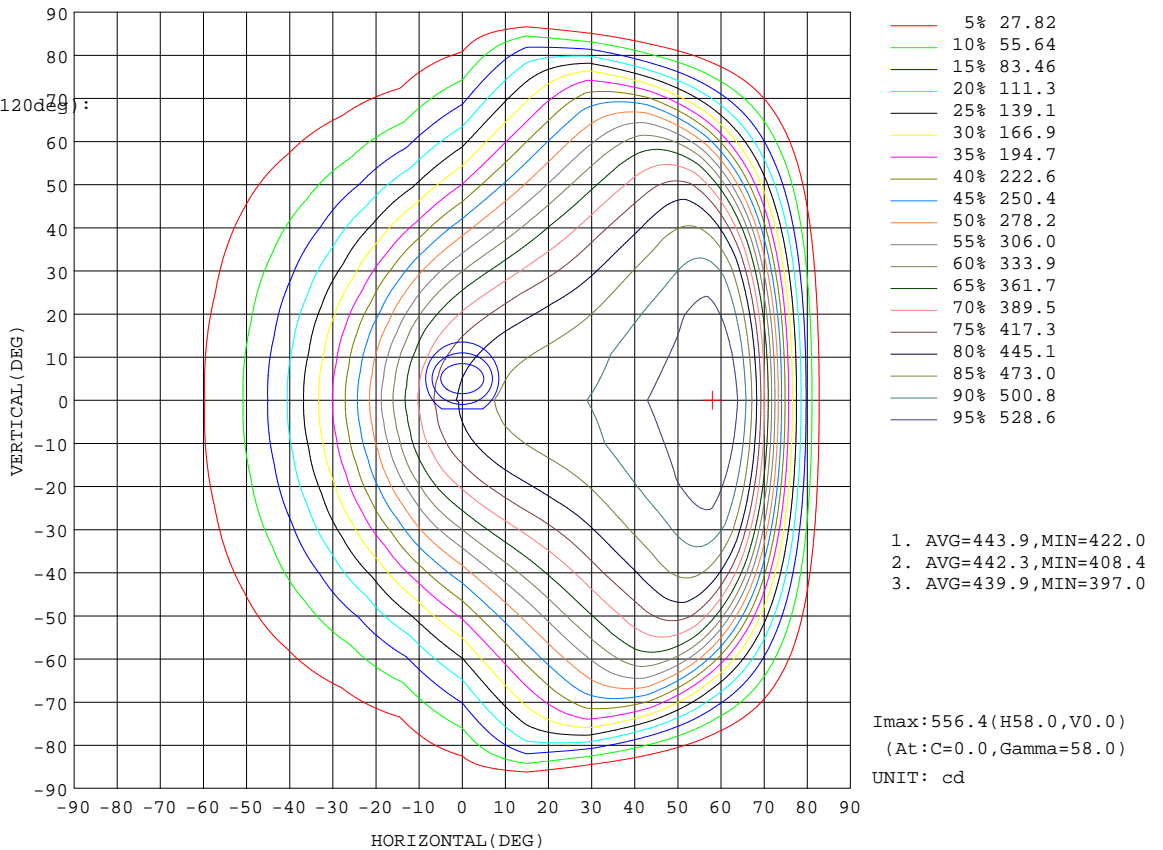


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Meng Yongjian
Test Date:2017-01-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity:52%
Test Distance:5.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.6V I:0.1082A P:22.63W PF:0.9501 Lamp Flux:1262.88x1 lm		
NAME: FW10-22W-840	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: L290mm*W45mm*H60mm	
MFR.: NEKO LIGHTING AG		

Flux out:649.2 lm

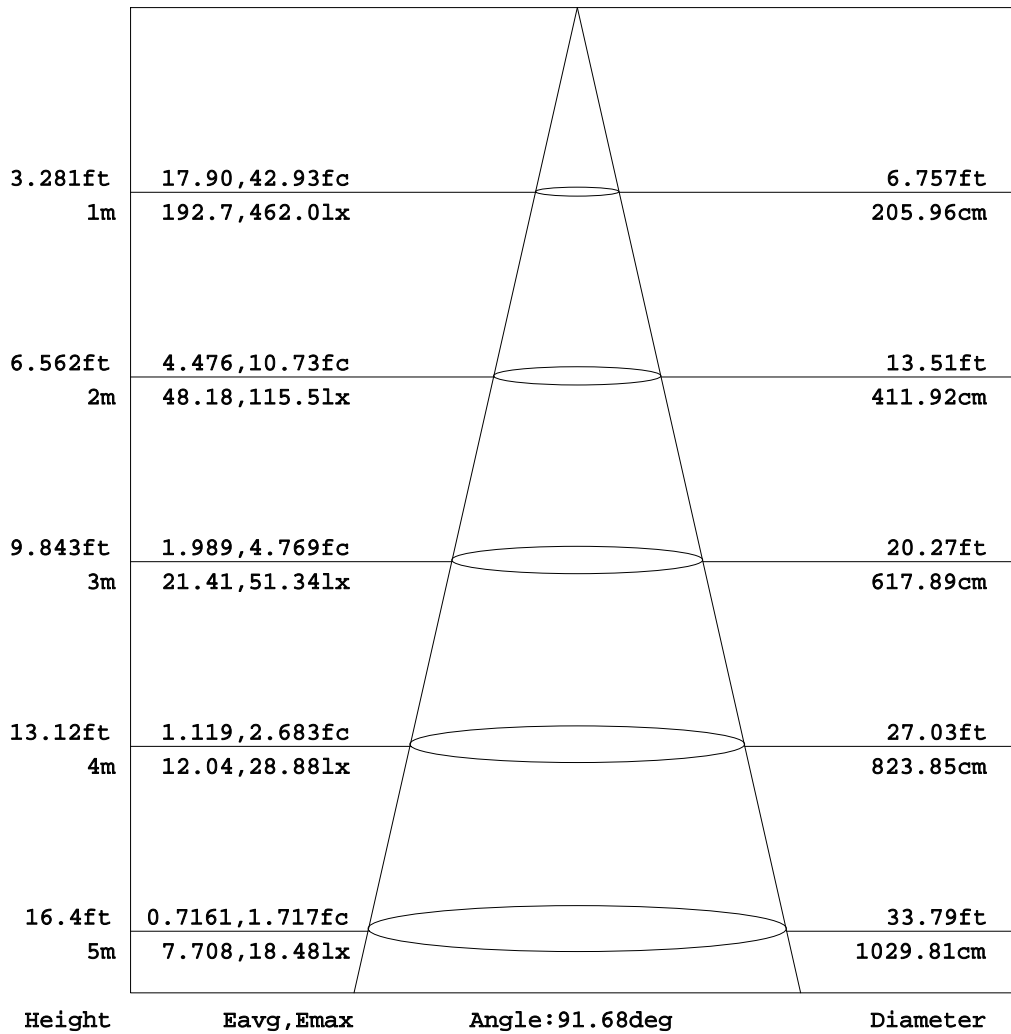


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Meng Yongjian
Test Date:2017-01-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity:52%
Test Distance:5.850m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.6V I:0.1082A P:22.63W PF:0.9501 Lamp Flux:1262.88x1 lm		
NAME: FW10-22W-840	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: L290mm*W45mm*H60mm	
MFR.: NEKO LIGHTING AG		

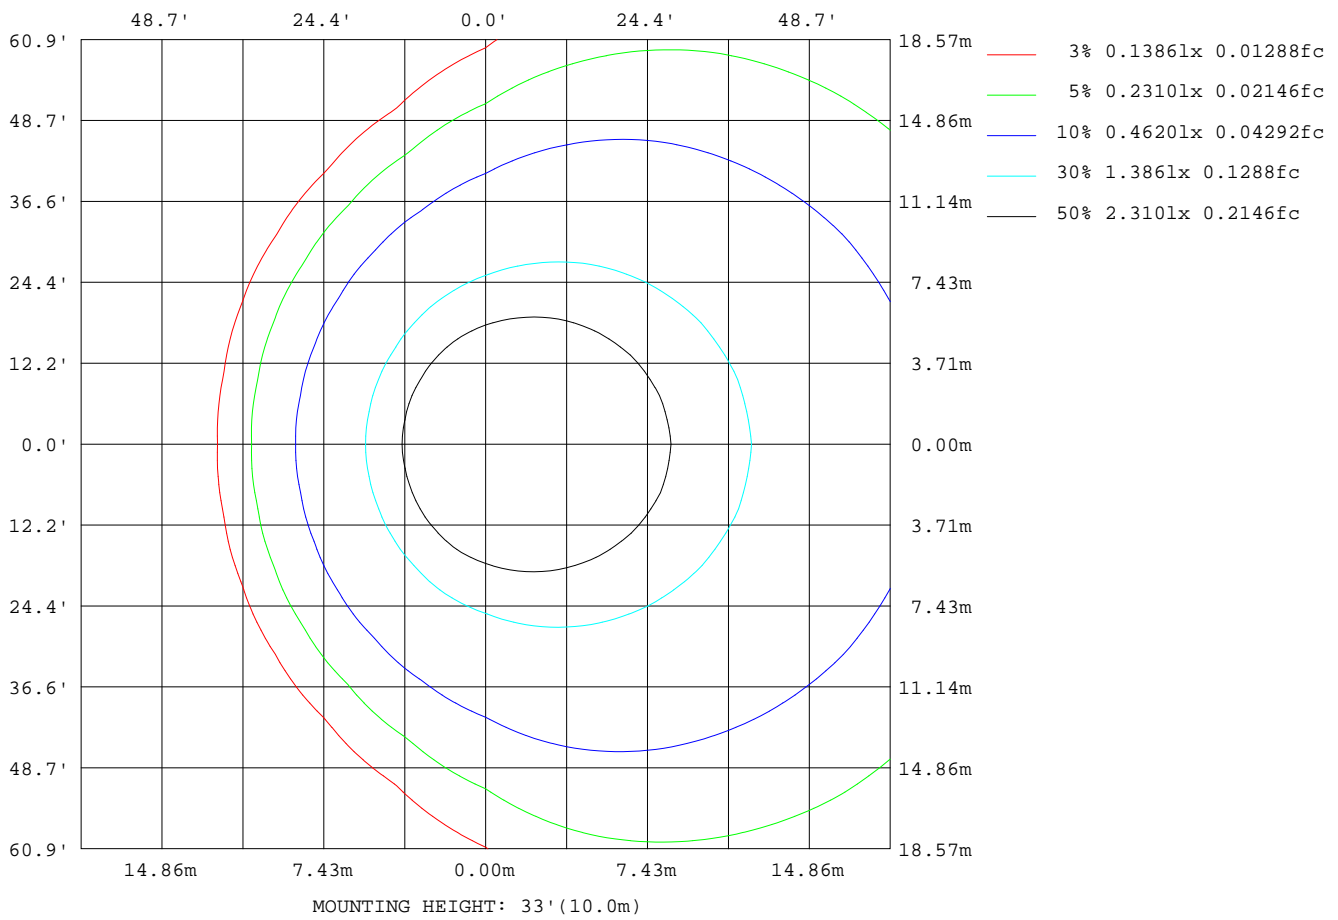

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Meng Yongjian
Test Date:2017-01-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity:52%
Test Distance:5.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

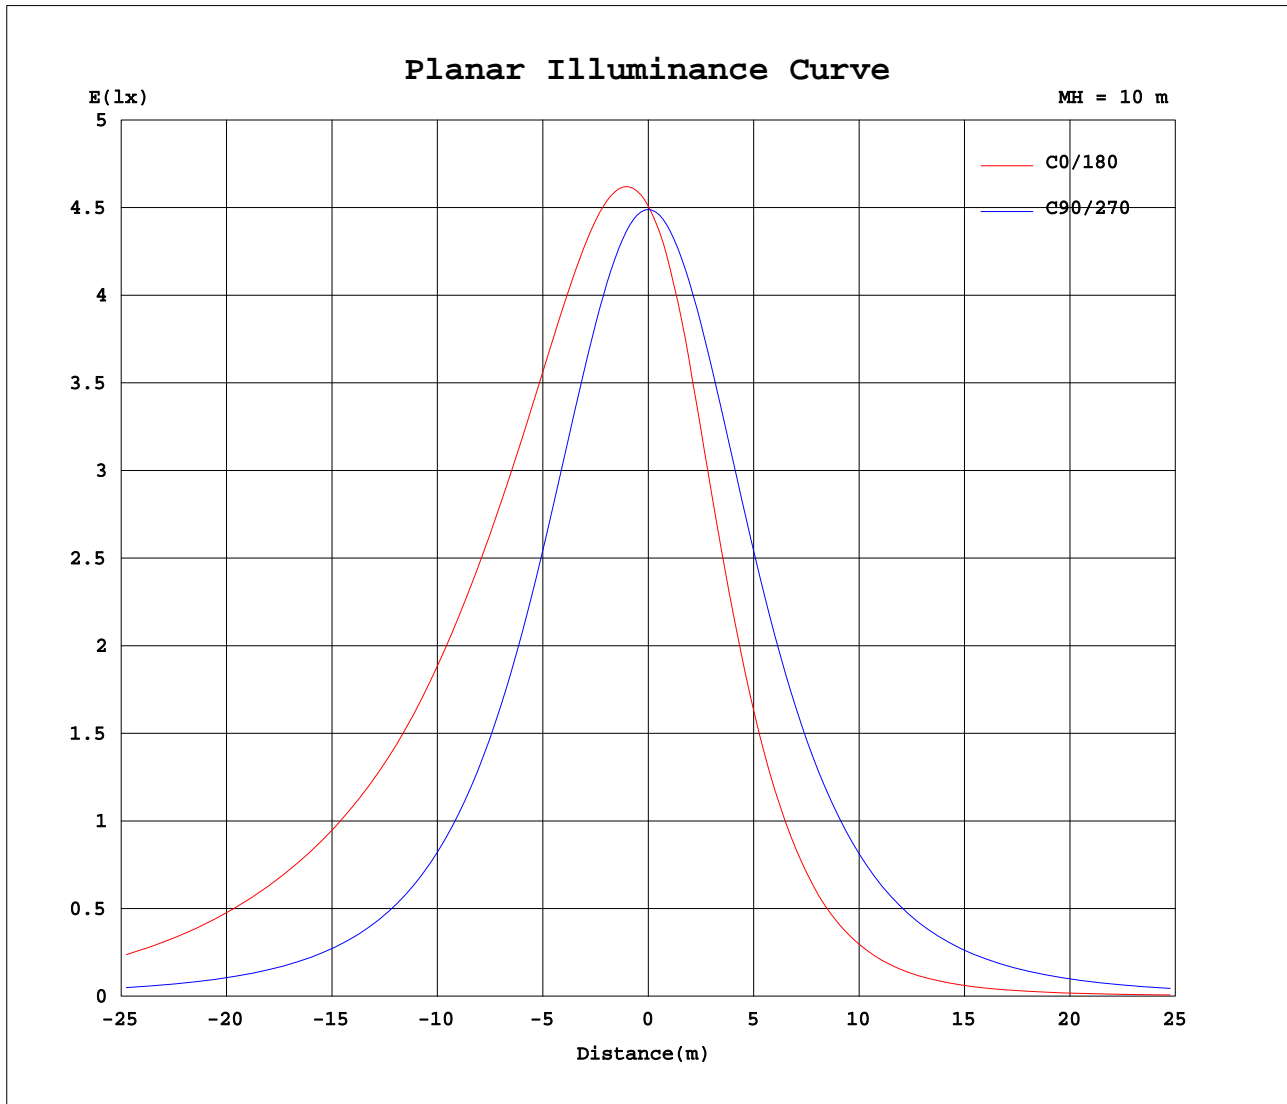

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Meng Yongjian
 Test Date: 2017-01-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity: 52%
 Test Distance: 5.850m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	15.0	30.0	45.0	60.0	75.0	90.0	105.0	120.0	135.0
0.0	450.9	450.2	450.2	449.6	449.6	449.2	449.0	448.8	448.6	448.7
3.0	461.3	460.2	459.0	456.5	453.9	450.8	447.6	444.6	441.4	439.2
6.0	469.7	468.3	465.6	461.2	455.9	449.9	443.4	437.5	431.5	426.8
9.0	476.4	474.5	470.5	463.8	455.6	446.5	436.7	427.7	418.4	410.2
12.0	481.8	479.4	473.7	464.7	453.4	440.9	427.5	415.3	401.8	391.0
15.0	486.1	483.1	475.6	464.1	449.5	433.3	416.1	400.5	382.9	367.7
18.0	489.4	485.9	476.6	462.3	444.0	424.0	402.7	383.3	361.6	341.0
21.0	492.2	488.0	476.7	459.5	437.3	413.1	387.5	364.1	337.6	313.8
24.0	495.1	490.0	476.3	455.8	429.6	400.8	370.9	343.2	311.9	285.8
27.0	498.4	492.3	475.9	451.5	421.0	387.5	352.9	321.2	286.2	257.9
30.0	502.4	495.1	475.7	447.0	411.8	373.4	333.9	298.7	260.2	230.6
33.0	507.5	498.9	475.8	442.4	402.2	358.7	314.2	275.2	234.3	204.3
36.0	513.5	503.4	476.6	438.0	392.5	343.7	293.9	251.5	209.1	179.3
39.0	519.9	508.5	477.8	433.7	382.8	328.6	273.5	227.4	185.1	155.7
42.0	526.5	513.7	479.1	429.6	373.1	313.5	253.0	204.1	162.1	133.8
45.0	533.0	518.7	480.1	425.5	363.3	298.6	232.5	181.8	140.4	113.7
48.0	538.9	523.1	480.4	420.8	353.3	283.6	212.5	160.0	120.3	95.64
51.0	545.0	527.0	479.6	415.2	343.3	268.8	192.9	139.5	101.9	79.78
54.0	552.0	532.0	478.0	408.4	332.5	254.1	173.9	119.6	85.43	66.11
57.0	556.1	534.6	476.2	400.0	321.0	239.3	155.6	101.7	70.69	54.06
60.0	553.9	532.3	470.7	390.3	308.2	224.4	137.9	85.19	57.53	43.71
63.0	537.4	518.5	458.9	378.3	294.1	209.3	121.1	70.18	46.54	35.14
66.0	497.2	484.2	434.2	361.6	278.6	194.0	104.9	56.57	37.05	28.06
69.0	424.8	420.4	388.5	336.3	261.6	178.1	89.37	44.59	29.08	22.21
72.0	324.0	327.2	316.3	295.8	238.8	160.9	74.51	34.05	22.49	17.35
75.0	216.5	222.9	226.0	234.0	208.4	142.5	60.20	25.17	17.13	13.31
78.0	124.9	132.0	138.5	158.2	163.5	121.8	46.89	17.89	12.67	9.929
81.0	57.04	61.18	69.46	86.09	103.8	96.66	34.24	12.09	8.913	7.088
84.0	9.208	12.27	18.15	31.29	46.53	61.71	21.65	7.268	5.763	4.722
87.0	0.6495	0.8492	1.128	1.408	4.395	19.12	9.298	3.548	3.036	2.526
90.0	0.2055	0.3498	0.5116	0.5554	0.6144	0.6778	0.9795	0.7981	0.9008	0.9118
G/C	150.0	165.0	180.0	195.0	210.0	225.0	240.0	255.0	270.0	285.0
0.0	448.2	448.5	450.9	450.2	450.2	449.6	449.6	449.2	449.0	448.8
3.0	436.9	436.1	438.2	437.8	439.0	440.1	442.5	444.8	447.7	450.4
6.0	422.0	419.6	421.3	421.2	424.4	427.5	432.7	437.5	443.6	449.4
9.0	402.9	399.4	400.5	400.7	405.4	410.6	419.6	427.5	436.9	445.9
12.0	380.1	373.4	373.6	374.6	382.8	391.1	402.9	415.0	427.7	440.2
15.0	352.3	344.7	344.2	345.6	354.6	367.1	383.8	399.8	416.3	432.4
18.0	323.9	314.7	313.8	315.5	326.1	340.3	362.2	382.3	402.8	422.9
21.0	294.4	284.5	283.1	284.9	296.2	312.6	337.6	362.5	387.5	411.8
24.0	265.1	254.9	253.2	255.1	266.8	284.3	311.7	341.2	370.6	399.3
27.0	236.6	225.7	223.7	225.8	238.0	256.1	285.6	319.1	352.4	385.8
30.0	208.8	197.7	195.6	197.8	210.1	228.7	259.3	295.9	333.1	371.3
33.0	182.4	171.6	169.5	171.7	183.4	202.2	233.1	272.2	313.1	356.4
36.0	157.8	147.3	145.0	147.2	158.7	177.1	207.9	247.6	292.7	341.0
39.0	135.2	124.3	121.9	124.7	136.2	153.6	183.8	223.6	271.9	325.6
42.0	114.4	104.1	101.8	104.5	114.6	132.1	160.8	200.5	251.0	310.1
45.0	95.93	86.45	84.02	86.70	96.19	112.2	139.2	177.7	230.0	294.3
48.0	79.80	70.74	68.28	70.96	80.02	94.43	118.5	155.7	209.0	278.5
51.0	65.44	57.23	54.80	57.16	65.78	78.71	100.1	134.7	188.6	262.6
54.0	53.29	46.09	43.63	45.94	53.56	64.81	83.51	115.2	168.8	247.0
57.0	43.23	36.77	34.47	36.63	43.40	52.85	68.72	97.15	149.8	231.4
60.0	34.78	29.29	27.17	29.12	34.89	42.55	55.84	80.72	131.4	215.9
63.0	27.90	23.30	21.36	23.11	27.96	34.03	44.91	65.53	113.6	199.9
66.0	22.31	18.48	16.76	18.23	22.26	26.97	35.48	52.31	97.03	183.5
69.0	17.64	14.61	13.14	14.34	17.50	21.22	27.60	40.63	81.30	167.3
72.0	13.78	11.45	10.27	11.21	13.64	16.48	21.12	30.54	66.31	150.8
75.0	10.59	8.871	7.958	8.672	10.49	12.56	15.90	22.19	52.26	133.2
78.0	7.946	6.732	6.086	6.580	7.843	9.360	11.61	15.36	39.10	114.5
81.0	5.775	4.965	4.487	4.817	5.717	6.708	8.190	10.05	26.97	93.02
84.0	3.806	3.299	2.979	3.199	3.788	4.467	5.345	6.105	15.81	63.72
87.0	2.021	1.750	1.625	1.758	2.051	2.394	2.911	3.200	6.195	23.87
90.0	0.9183	0.8615	0.6822	0.7347	0.7478	0.7674	0.6953	0.7631	0.5969	0.5554
G/C	300.0	315.0	330.0	345.0						
0.0	448.6	448.7	448.2	448.5						
3.0	453.0	455.5	457.0	458.4						
6.0	455.1	460.1	463.8	466.4						
9.0	454.9	462.7	468.7	472.8						
12.0	452.7	463.6	472.1	477.6						
15.0	448.9	463.0	474.2	481.3						
18.0	443.5	461.2	475.2	484.0						
21.0	436.7	458.3	475.3	486.2						

C Range: 0 - 360DEG

C Interval: 15.0DEG

Test Speed: HIGH

Temperature: 25.3DEG

Operators: Meng Yongjian

Test Date: 2017-01-09

γ Range: 0 - 90DEG

γ Interval: 1.0DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288

Humidity: 52%

Test Distance: 5.850m [K=1.0000]

Remarks:

Photometric Data Table [cd]

24.0	428.9	454.6	475.0	488.1
27.0	420.3	450.2	474.5	490.4
30.0	411.0	445.6	474.2	493.2
33.0	401.2	440.9	474.2	496.8
36.0	391.2	436.3	474.8	501.2
39.0	381.2	431.7	475.7	506.1
42.0	371.2	427.2	476.8	511.2
45.0	361.0	422.7	477.5	516.1
48.0	350.2	417.7	477.7	520.2
51.0	338.9	411.8	476.7	523.9
54.0	327.4	404.7	474.6	528.5
57.0	315.5	395.9	472.6	530.9
60.0	302.9	385.6	466.9	528.7
63.0	289.1	373.6	456.0	515.5
66.0	274.0	356.8	433.6	482.3
69.0	257.7	333.1	392.0	420.5
72.0	236.7	295.5	325.0	329.7
75.0	209.3	238.1	237.4	226.0
78.0	169.6	164.4	149.1	133.7
81.0	113.7	92.68	76.06	64.96
84.0	55.42	35.99	23.40	14.29
87.0	10.42	1.336	0.9573	0.7719
90.0	0.3892	0.3367	0.2974	0.2580

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Meng Yongjian
Test Date: 2017-01-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 52%
Test Distance: 5.850m [K=1.0000]
Remarks: