
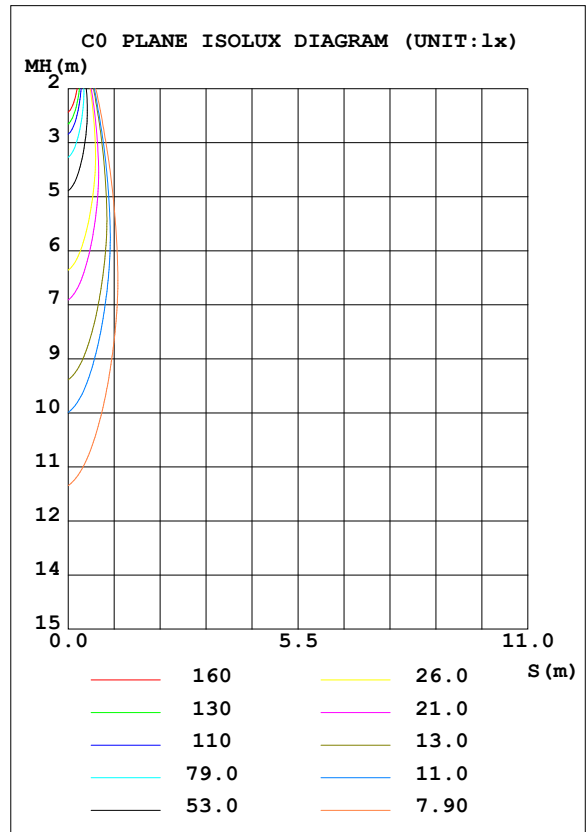


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	CREE-4000K	Imax (cd)	1116	S/MH (C0/180)	0.33
NOMINAL POWER (W)	1.6	LOR (%)	100.0	S/MH (C90/270)	0.23
RATED VOLTAGE (V)	5	TOTAL FLUX (lm)	116.43	η UP, DN (C0-180)	0.0, 61.0
NOMINAL FLUX (lm)	116.434	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 39.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	3.3	η down (%)	100.0	CIBSE SHR MAX	1.00

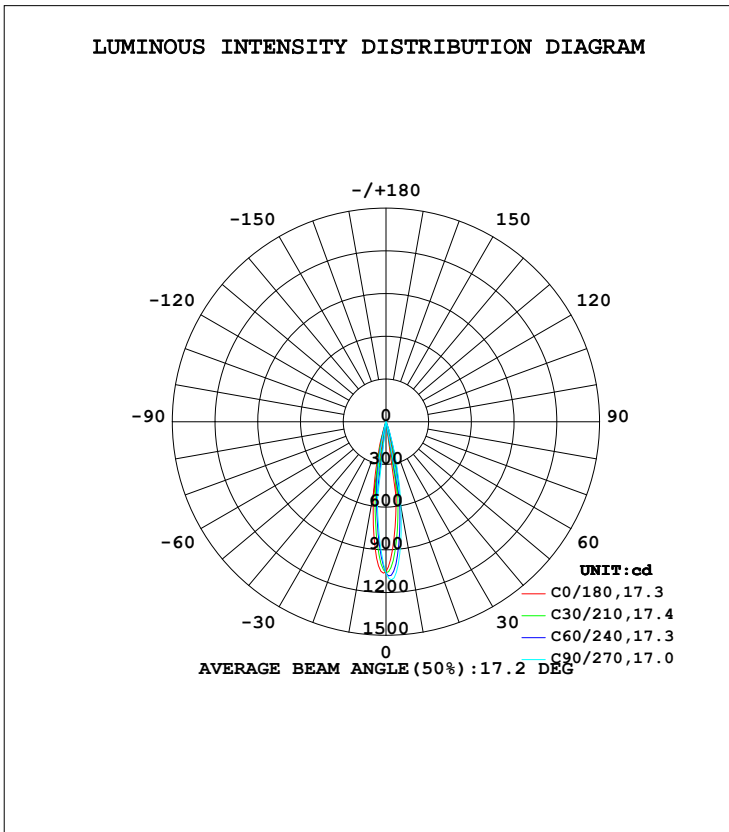

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Myles
Test Date: 2018-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 56%
Test Distance: 5.850m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	375.9	521.3	606.9	600.9	502.3	359.4	297.7	296.1	0- 10	66.04	66.04	56.7,56.7
20	21.26	42.42	61.28	54.55	32.75	18.50	12.18	12.61	10- 20	44.54	110.6	95,95
30	2.368	3.158	3.590	3.407	2.849	2.139	1.932	1.901	20- 30	4.605	115.2	98.9,98.9
40	0.4754	0.7177	0.8871	0.8405	0.6235	0.4639	0.4478	0.4508	30- 40	0.8448	116.0	99.7,99.7
50	0.1927	0.2250	0.2868	0.2512	0.2053	0.1795	0.1506	0.1729	40- 50	0.2746	116.3	99.9,99.9
60	0.0525	0.0480	0.0810	0.0502	0.0349	0.0482	0.0283	0.0459	50- 60	0.1019	116.4	100,100
70	0.0131	0	0.0175	0	0	0.0109	0	0.0109	60- 70	0.0211	116.4	100,100
80	0	0	0.0044	0	0	0	0	0.0000	70- 80	0.0037	116.4	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0004	116.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 116.2 lm

%lum = 99.8%
%lamp = 99.8%

Conical surface Flux(120deg): 116.41 lm


%lum = 100.0%
%lamp = 100.0%

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Myles
Test Date:2018-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:56%
Test Distance:5.850m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		

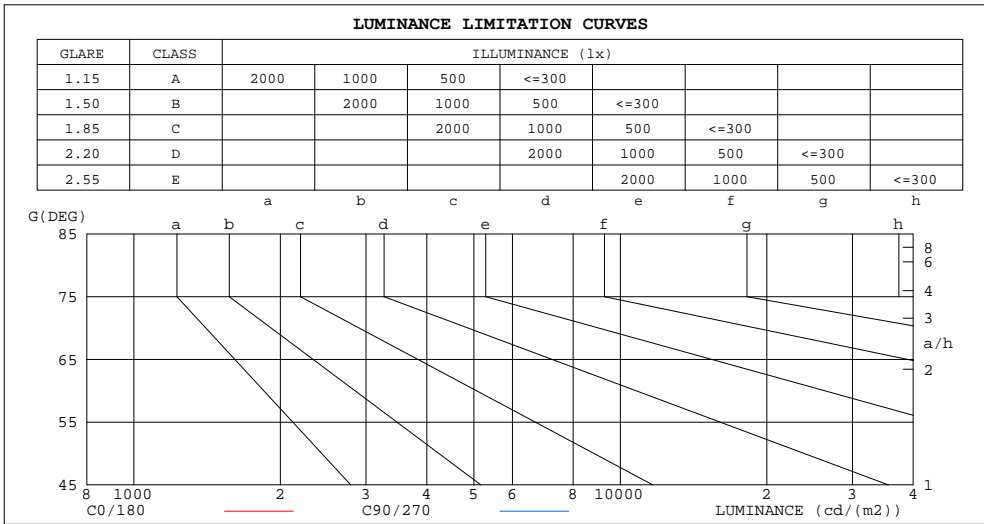

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	0	19
80	0	20
75	20	26
70	30	40
65	40	64
60	82	126
55	139	219
50	233	346
45	344	490


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Myles
 Test Date:2018-06-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:56%
 Test Distance:5.850m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.14	1.12	1.11	1.12	1.10	1.09	1.08	1.07	1.06	1.04	1.03	1.03	1.01	1.00	.00	.98
2.0	1.10	1.07	1.05	1.08	1.06	1.04	1.05	1.03	1.02	1.02	1.01	.00	.00	.99	.98	.96
3.0	1.06	1.03	1.01	1.05	1.02	1.00	1.03	1.00	.99	1.00	.99	.97	.98	.97	.96	.95
4.0	1.03	1.00	.98	1.02	.99	.97	1.00	.98	.96	.99	.97	.95	.97	.95	.94	.93
5.0	1.01	.97	.95	.00	.97	.95	.98	.96	.94	.97	.95	.93	.96	.94	.92	.91
6.0	.98	.95	.93	.98	.95	.92	.96	.94	.92	.95	.93	.91	.94	.92	.91	.90
7.0	.96	.93	.91	.96	.93	.90	.95	.92	.90	.94	.91	.90	.93	.91	.89	.88
8.0	.94	.91	.89	.94	.91	.89	.93	.90	.88	.92	.90	.88	.92	.89	.88	.87
9.0	.93	.90	.87	.92	.89	.87	.92	.89	.87	.91	.89	.87	.90	.88	.87	.86
10.0	.91	.88	.86	.91	.88	.86	.90	.88	.86	.90	.87	.85	.89	.87	.85	.85

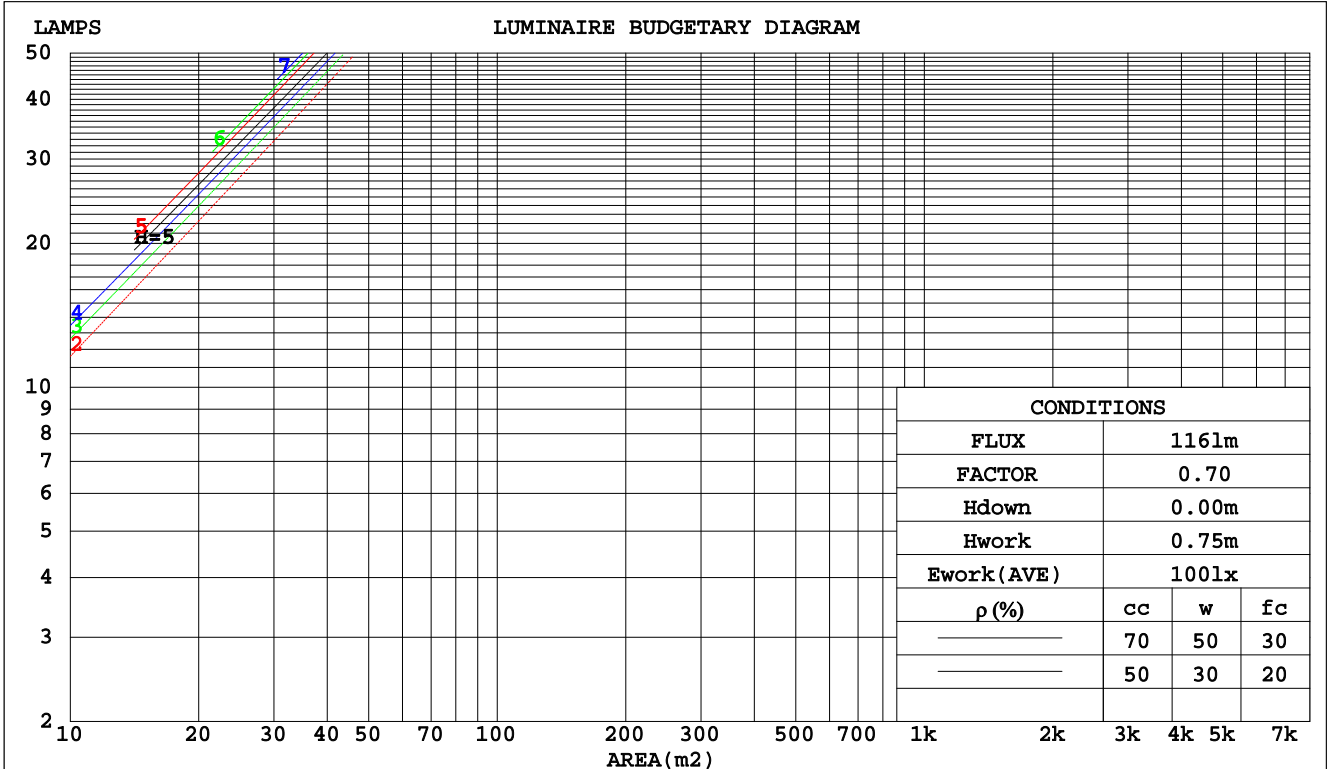

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Myles
Test Date:2018-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:56%
Test Distance:5.850m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.117	.067	.021	.111	.063	.020	.098	.056	.018	.087	.050	.016	.077	.044	.014	
2.0	.107	.058	.018	.101	.056	.017	.091	.051	.016	.082	.046	.014	.073	.042	.013	
3.0	.098	.052	.016	.093	.050	.015	.085	.046	.014	.077	.042	.013	.070	.039	.012	
4.0	.090	.047	.014	.087	.045	.013	.080	.042	.013	.073	.039	.012	.068	.037	.011	
5.0	.084	.043	.012	.081	.042	.012	.075	.039	.012	.070	.037	.011	.065	.035	.010	
6.0	.079	.040	.011	.076	.038	.011	.071	.037	.011	.067	.035	.010	.062	.033	.010	
7.0	.074	.037	.010	.072	.036	.010	.068	.034	.010	.064	.033	.010	.060	.031	.009	
8.0	.070	.034	.010	.068	.034	.009	.065	.032	.009	.061	.031	.009	.058	.030	.009	
9.0	.067	.032	.009	.065	.032	.009	.062	.031	.009	.059	.029	.008	.056	.028	.008	
10.0	.063	.030	.008	.062	.030	.008	.059	.029	.008	.057	.028	.008	.054	.027	.008	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.167	.158	.150	.143	.135	.129	.098	.093	.089	.056	.054	.052	.018	.017	.017	
2.0	.148	.133	.120	.126	.114	.104	.087	.079	.073	.050	.046	.043	.016	.015	.014	
3.0	.131	.113	.099	.113	.098	.086	.077	.068	.060	.045	.040	.035	.014	.013	.012	
4.0	.118	.097	.082	.101	.084	.071	.069	.059	.050	.040	.034	.030	.013	.011	.010	
5.0	.106	.085	.069	.091	.073	.060	.063	.051	.042	.036	.030	.025	.012	.010	.008	
6.0	.097	.074	.059	.083	.064	.051	.057	.045	.036	.033	.027	.021	.011	.009	.007	
7.0	.088	.066	.050	.076	.057	.044	.053	.040	.031	.031	.024	.018	.010	.008	.006	
8.0	.081	.059	.043	.070	.051	.038	.048	.036	.027	.028	.021	.016	.009	.007	.005	
9.0	.075	.053	.038	.065	.046	.033	.045	.032	.023	.026	.019	.014	.008	.006	.005	
10.0	.070	.048	.033	.060	.042	.029	.042	.029	.021	.024	.017	.012	.008	.006	.004	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Myles
 Test Date:2018-06-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:56%
 Test Distance:5.850m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	0.8	1.3	1.0	1.5	1.6	2.6	3.1	2.8	3.2	3.4
3H	0.7	1.2	0.9	1.3	1.5	2.5	2.9	2.7	3.1	3.3
4H	0.6	1.1	0.9	1.3	1.5	2.4	2.9	2.6	3.1	3.3
6H	0.5	1.0	0.8	1.2	1.4	2.3	2.8	2.6	3.0	3.2
8H	0.5	0.9	0.8	1.2	1.4	2.3	2.7	2.6	2.9	3.2
12H	0.4	0.9	0.7	1.1	1.4	2.2	2.6	2.5	2.9	3.2
4H 2H	0.7	1.1	0.9	1.3	1.5	2.4	2.9	2.7	3.1	3.3
3H	0.5	0.9	0.8	1.2	1.4	2.3	2.7	2.6	2.9	3.2
4H	0.4	0.8	0.8	1.1	1.4	2.2	2.6	2.5	2.8	3.1
6H	0.3	0.7	0.7	1.0	1.3	2.1	2.4	2.4	2.7	3.1
8H	0.3	0.6	0.6	0.9	1.3	2.0	2.3	2.4	2.7	3.0
12H	0.2	0.5	0.6	0.9	1.3	2.0	2.3	2.4	2.6	3.0
8H 4H	0.3	0.6	0.7	0.9	1.3	2.0	2.3	2.4	2.7	3.0
6H	0.2	0.4	0.6	0.8	1.2	1.9	2.2	2.3	2.6	3.0
8H	0.1	0.3	0.5	0.7	1.2	1.8	2.1	2.3	2.5	2.9
12H	0.0	0.2	0.5	0.7	1.1	1.8	2.0	2.2	2.4	2.9
12H 4H	0.2	0.5	0.6	0.9	1.3	2.0	2.3	2.4	2.6	3.0
6H	0.1	0.3	0.5	0.7	1.2	1.8	2.1	2.3	2.5	2.9
8H	0.0	0.2	0.5	0.7	1.1	1.8	2.0	2.2	2.4	2.9
Variations with the observer position at spacings:										
S = 1.0H	+ 2.7 / - 6.9					+ 3.2 / - 7.0				
1.5H	+ 3.7 / - 3.7					+ 4.7 / - 4.4				
2.0H	+ 4.0 / - 6.7					+ 4.6 / - 7.1				

CIE Pub.117, 116.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -7.5)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Myles
 Test Date:2018-06-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:56%
 Test Distance:5.850m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	91	86	82	91	86	82	90	85	82	79
0.80	98	93	90	98	93	90	97	92	89	86
1.00	102	97	94	101	97	94	100	96	93	89
1.25	105	101	98	104	100	97	103	99	97	93
1.50	108	104	101	107	103	100	105	101	99	95
2.00	110	106	103	109	105	103	106	103	101	96
2.50	111	108	105	110	107	104	107	104	103	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	111	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	108	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Myles
 Test Date:2018-06-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:56%
 Test Distance:5.850m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		

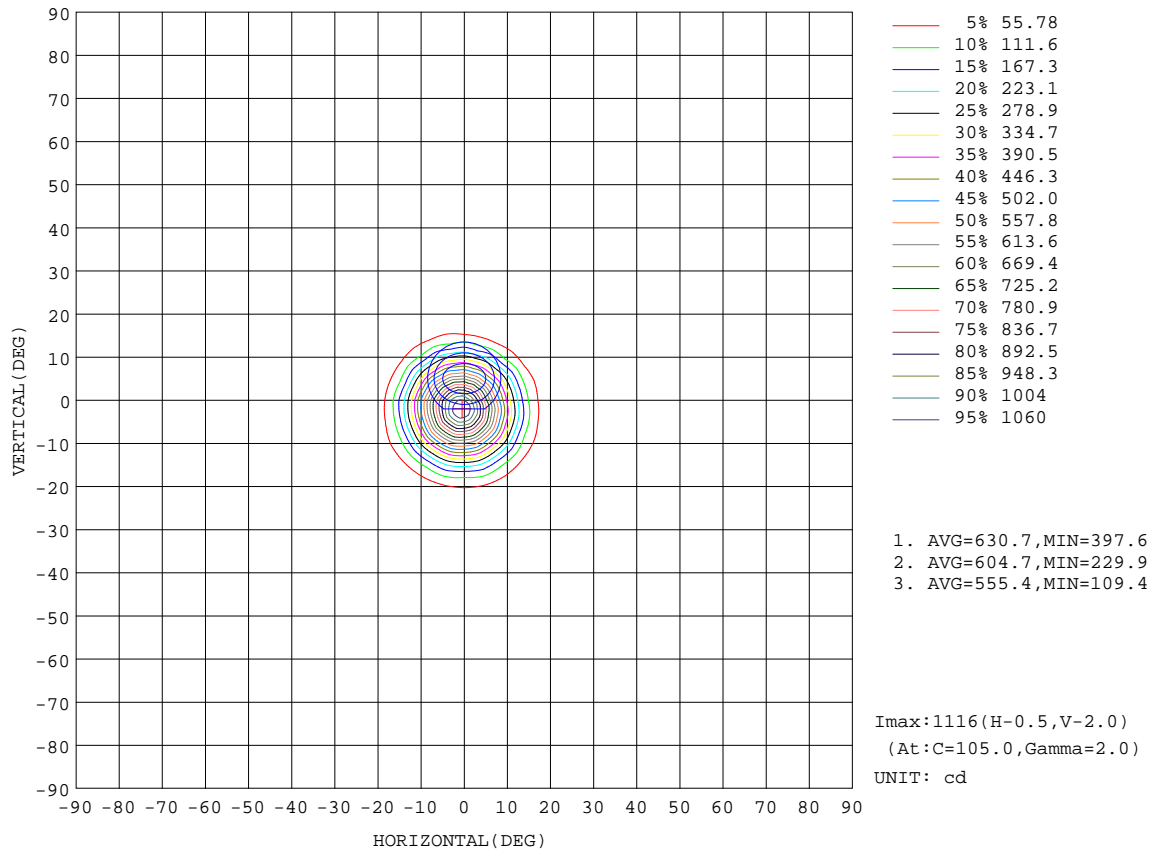


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Myles
Test Date:2018-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:56%
Test Distance:5.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		

Flux out:57.32 lm

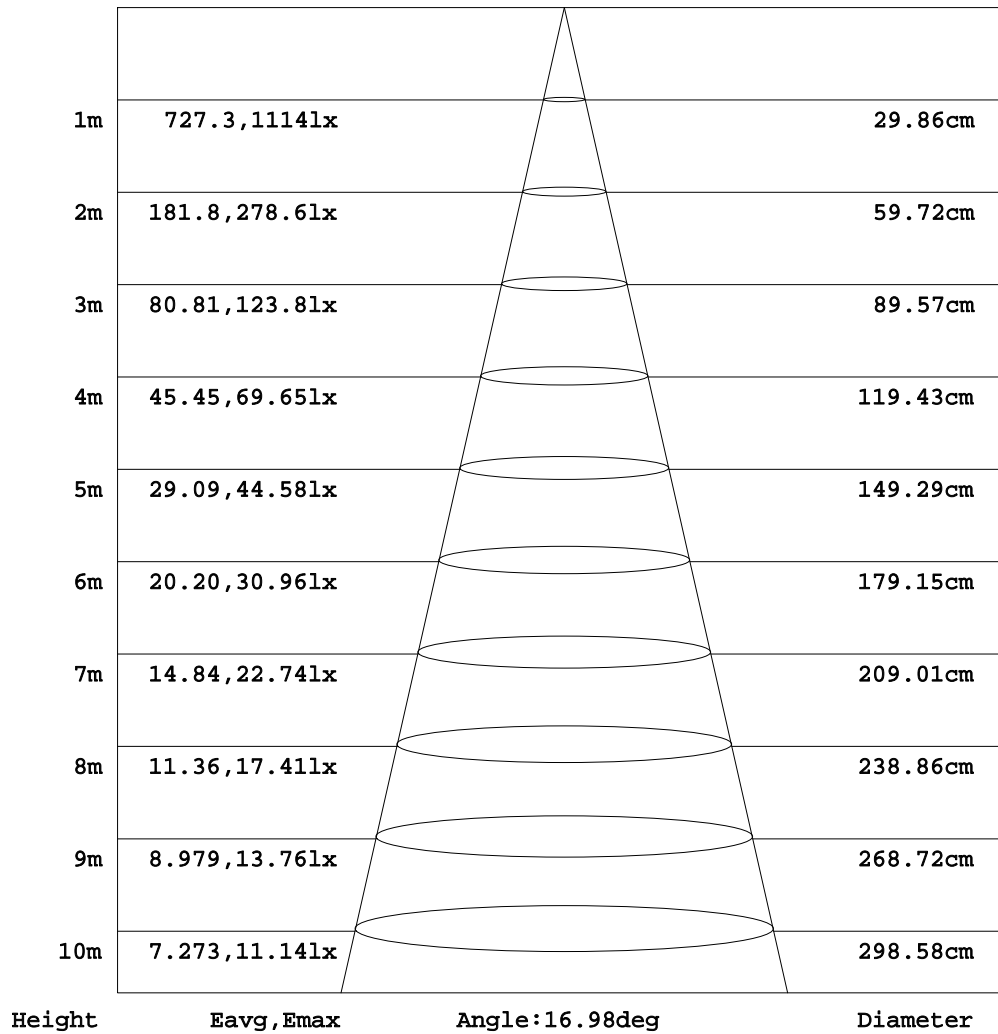


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Myles
Test Date:2018-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:56%
Test Distance:5.850m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		

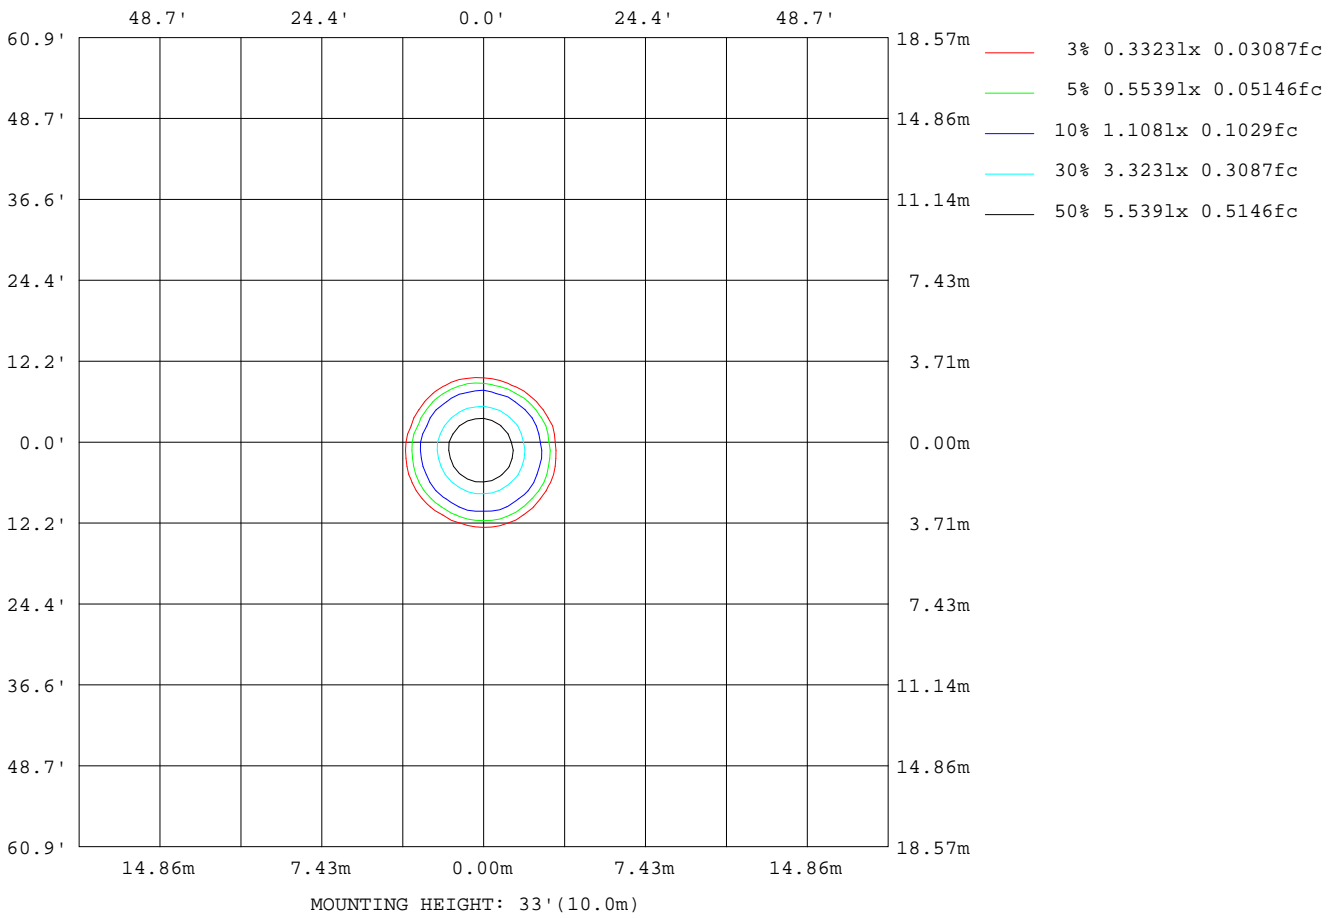

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Myles
Test Date:2018-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:56%
Test Distance:5.850m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		


AvgL	cd/m2
L_0~180 (65) av	26
L_0~180 (75) av	10
L_0~180 (85) av	0
L_90~270 (65) av	32
L_90~270 (75) av	13
L_90~270 (85) av	10
L_45 (65) av	33
L_45 (75) av	8
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Myles
Test Date:2018-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:56%
Test Distance:5.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

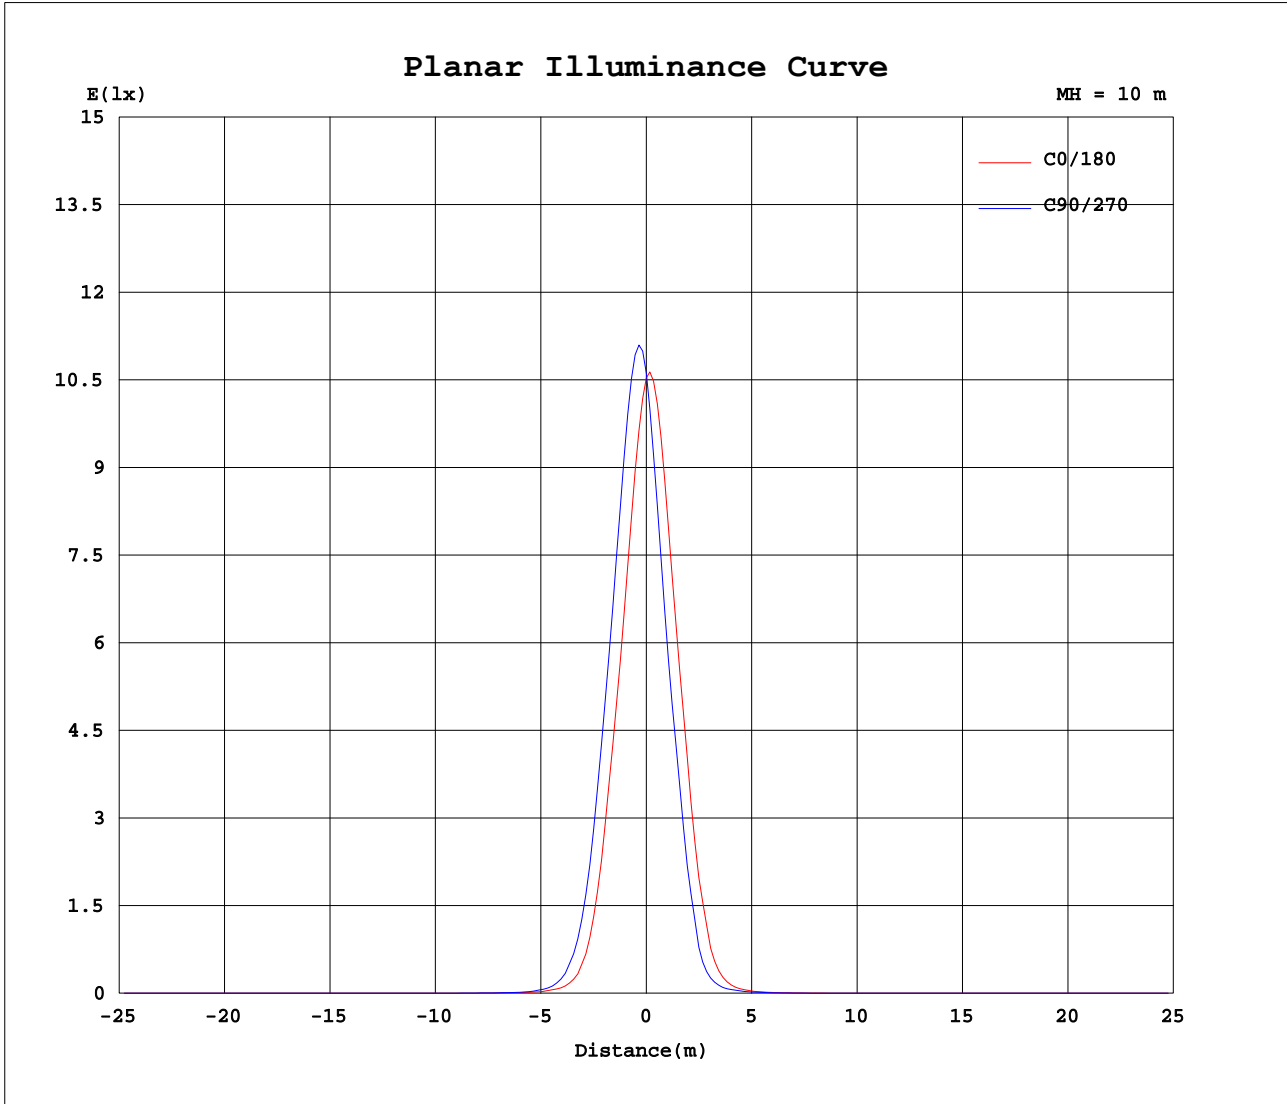

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Myles
 Test Date: 2018-06-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 56%
 Test Distance: 5.850m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:3.300V I:0.5000A P:1.650W PF:1.000 Freq:0Hz Lamp Flux:116.434x1 lm		
NAME: SIGN35-G-1.6W-940-18	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ40.5mm*H52mm	
MFR.: NEKO LIGHTING AG		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1054	1057	1059	1057	1062	1055	1062	1052	1059	1049	1054	1047	1054	1057	1059	1057	1062	1055	1062
5	741	801	842	904	940	988	1003	1023	1008	997	952	917	889	825	790	732	709	667	662
10	376	428	464	521	552	597	607	628	610	601	557	528	502	445	414	359	339	302	298
15	106	138	156	194	214	242	244	254	239	234	205	184	174	130	122	88.6	79.0	72.2	59.6
20	21.3	26.6	32.1	42.4	53.2	59.4	61.3	59.5	57.8	54.6	52.2	39.3	32.8	25.4	22.7	18.5	16.4	13.0	12.2
25	6.27	7.56	8.49	10.1	11.2	12.4	12.2	12.6	11.7	11.5	10.1	9.06	8.29	7.15	6.36	5.21	4.85	4.33	4.22
30	2.37	2.68	2.85	3.16	3.35	3.62	3.59	3.69	3.53	3.41	3.07	2.91	2.85	2.61	2.35	2.14	2.08	1.97	1.93
35	1.07	1.23	1.33	1.48	1.56	1.72	1.71	1.76	1.68	1.65	1.50	1.41	1.34	1.21	1.13	1.02	0.99	0.92	0.91
40	0.48	0.52	0.59	0.72	0.80	0.88	0.89	0.91	0.86	0.84	0.77	0.70	0.62	0.52	0.47	0.46	0.45	0.46	0.45
45	0.31	0.32	0.36	0.37	0.41	0.42	0.45	0.44	0.45	0.41	0.39	0.35	0.34	0.34	0.31	0.30	0.28	0.30	0.28
50	0.19	0.19	0.23	0.22	0.26	0.26	0.29	0.28	0.29	0.25	0.25	0.21	0.21	0.21	0.18	0.18	0.16	0.17	0.15
55	0.10	0.10	0.12	0.12	0.15	0.14	0.16	0.15	0.16	0.13	0.13	0.10	0.10	0.11	0.09	0.10	0.07	0.09	0.07
60	0.05	0.03	0.06	0.05	0.07	0.06	0.08	0.06	0.08	0.05	0.05	0.03	0.03	0.06	0.03	0.05	0.03	0.04	0.03
65	0.02	0.01	0.03	0.01	0.04	0.02	0.04	0.02	0.04	0.01	0.03	0.00	0.01	0.03	0.00	0.03	0.00	0.02	0.00
70	0.01	0.00	0.02	0.00	0.02	0.00	0.02	0.00	0.02	0.00	0.01	0.00	0.00	0.01	0.00	0.01	0.00	0.02	0.00
75	0.01	0.00	0.01	0.00	0.01	0.00	0.01	0.00	0.01	0.00	0.00	0.00	0.00	0.01	0.00	0.01	0.00	0.01	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Myles
Test Date:2018-06-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:56%
Test Distance:5.850m [K=1.0000]
Remarks:

