


NEKO / SUGAR450
Ceiling Light System



16W CRI80 2700K Tunable White Available
24W CRI90 3000K 4000K
OSRAM 50,000h@L80B10 UGR < 19 IP40
5 YEAR WARRANTY CB CE Intertek



Black




Black-Gold




White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279016N-BB
						3000K	2600lm	2000lm	SBSM-8309016N-BB
						4000K	2800lm	2200lm	SBSM-8409016N-BB
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279024N-BB
						3000K	3700lm	2800lm	SBSM-8309024N-BB
						4000K	4000lm	3000lm	SBSM-8409024N-BB
						2700K	3500lm	2600lm	SBSM-8279016N-BG
16 W	18 W	34 V	500 mA	80	3000K	90°	2600lm	2000lm	SBSM-8309016N-BG
						4000K	2800lm	2200lm	SBSM-8409016N-BG
						2700K	3500lm	2600lm	SBSM-8279024N-BG
24 W	26 W	34 V	700 mA	80	3000K	90°	3700lm	2800lm	SBSM-8309024N-BG
						4000K	4000lm	3000lm	SBSM-8409024N-BG
						2700K	3500lm	2600lm	SBSM-8279016N-WW
						3000K	2600lm	2000lm	SBSM-8309016N-WW
16 W	18 W	34 V	500 mA	80	4000K	90°	2800lm	2200lm	SBSM-8409016N-WW
						2700K	3500lm	2600lm	SBSM-8279024N-WW
						3000K	3700lm	2800lm	SBSM-8309024N-WW
24 W	26 W	34 V	700 mA	80	4000K	90°	4000lm	3000lm	SBSM-8409024N-WW


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

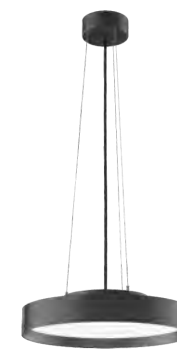

Black



Black-Gold



White

Optional accessory



Magnetic Uplight Module 450

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-BB
						3000K	2600lm	2000lm	SBPW-8309016N-BB
						4000K	2800lm	2200lm	SBPW-8409016N-BB
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-BB
						3000K	3700lm	2800lm	SBPW-8309024N-BB
						4000K	4000lm	3000lm	SBPW-8409024N-BB

Standard pendant length: 1200mm

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-BG
						3000K	2600lm	2000lm	SBPW-8309016N-BG
						4000K	2800lm	2200lm	SBPW-8409016N-BG
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-BG
						3000K	3700lm	2800lm	SBPW-8309024N-BG
						4000K	4000lm	3000lm	SBPW-8409024N-BG

Standard pendant length: 1200mm

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-WW
						3000K	2600lm	2000lm	SBPW-8309016N-WW
						4000K	2800lm	2200lm	SBPW-8409016N-WW
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-WW
						3000K	3700lm	2800lm	SBPW-8309024N-WW
						4000K	4000lm	3000lm	SBPW-8409024N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
						3000K	1200lm	1100lm	UM45-830A111N-NN
						4000K	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SBPW-8309016N-WN with Uplight Module
SBPW-8309016N-WN-U



Black



Black-Gold



White

Optional accessory



Magnetic Uplight Module 450

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279016N-BB
					3000K	90°	2600lm	2000lm	SBPR-8309016N-BB
					4000K	90°	2800lm	2200lm	SBPR-8409016N-BB
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279024N-BB
					3000K	90°	3700lm	2800lm	SBPR-8309024N-BB
					4000K	90°	4000lm	3000lm	SBPR-8409024N-BB

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279016N-BG
					3000K	90°	2600lm	2000lm	SBPR-8309016N-BG
					4000K	90°	2800lm	2200lm	SBPR-8409016N-BG
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279024N-BG
					3000K	90°	3700lm	2800lm	SBPR-8309024N-BG
					4000K	90°	4000lm	3000lm	SBPR-8409024N-BG

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279016N-WW
					3000K	90°	2600lm	2000lm	SBPR-8309016N-WW
					4000K	90°	2800lm	2200lm	SBPR-8409016N-WW
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279024N-WW
					3000K	90°	3700lm	2800lm	SBPR-8309024N-WW
					4000K	90°	4000lm	3000lm	SBPR-8409024N-WW

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SBPR-8309016N-WW with Uplight Module
SBPR-8309016N-WW-U

