
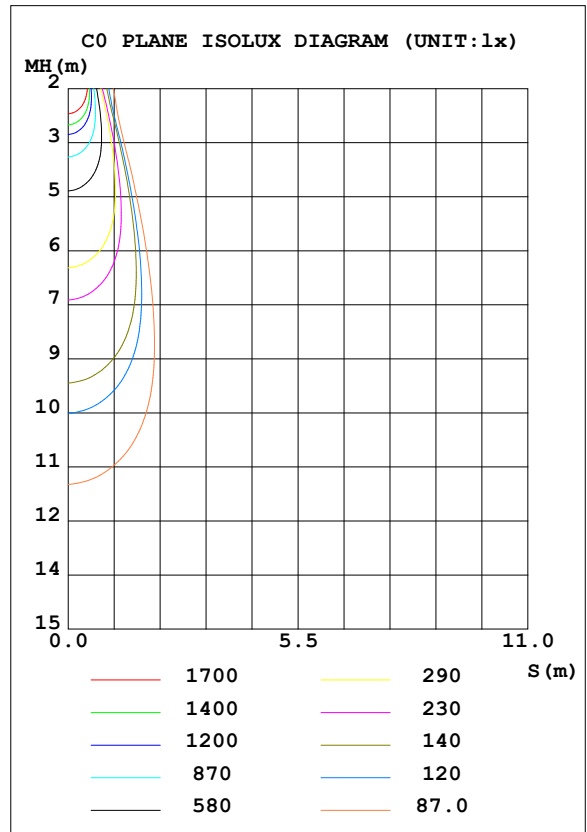


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 118.45 lm/W			
MODEL	CITIZEN-4000K	I _{max} (cd)	11600	S/MH (C0/180)	0.47
NOMINAL POWER (W)	28	LOR (%)	100.0	S/MH (C90/270)	0.51
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	3274.3	η UP, DN (C0-180)	0.0, 44.3
NOMINAL FLUX (lm)	3274.26	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 55.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	220	η down (%)	100.0	CIBSE SHR MAX	1.00

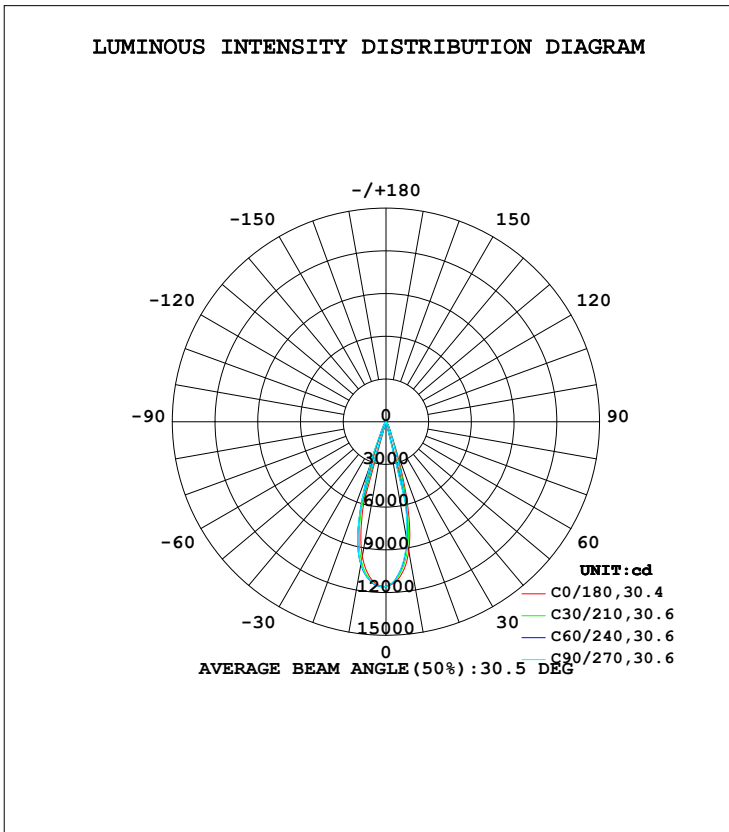

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2023-07-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 58%
 Test Distance: 9.767m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	923.5	866.8	837.4	876.1	958.2	1006	1016	997.4	0- 10	1000	1000	30.6,30.6
20	199.1	162.7	148.9	171.4	229.5	308.3	335.0	307.8	10- 20	1576	2577	78.7,78.7
30	42.40	39.91	39.57	37.98	40.35	44.55	45.83	45.11	20- 30	431.2	3008	91.9,91.9
40	15.65	14.84	14.80	14.71	15.60	16.06	17.11	16.85	30- 40	158.5	3166	96.7,96.7
50	4.947	4.877	5.063	4.997	5.059	5.028	5.101	5.263	40- 50	74.35	3241	99,99
60	1.096	1.092	1.187	1.203	1.161	1.157	1.197	1.224	50- 60	24.28	3265	99.7,99.7
70	0.3666	0.3674	0.4039	0.4096	0.3900	0.3931	0.4158	0.4233	60- 70	7.305	3272	99.9,99.9
80	0.0293	0.0240	0.0238	0.0265	0.0257	0.0300	0.0344	0.0329	70- 80	1.930	3274	100,100
90	0.0129	0.0123	0.0129	0.0126	0.0116	0.0110	0.0110	0.0113	80- 90	0.1614	3274	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 3212.2 lm

%lum = 98.1%

%lamp = 98.1%

Conical surface Flux(120deg): 3264.9 lm

%lum = 99.7%


%lamp = 99.7%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jasoan
Test Date:2023-07-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:9.767m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		

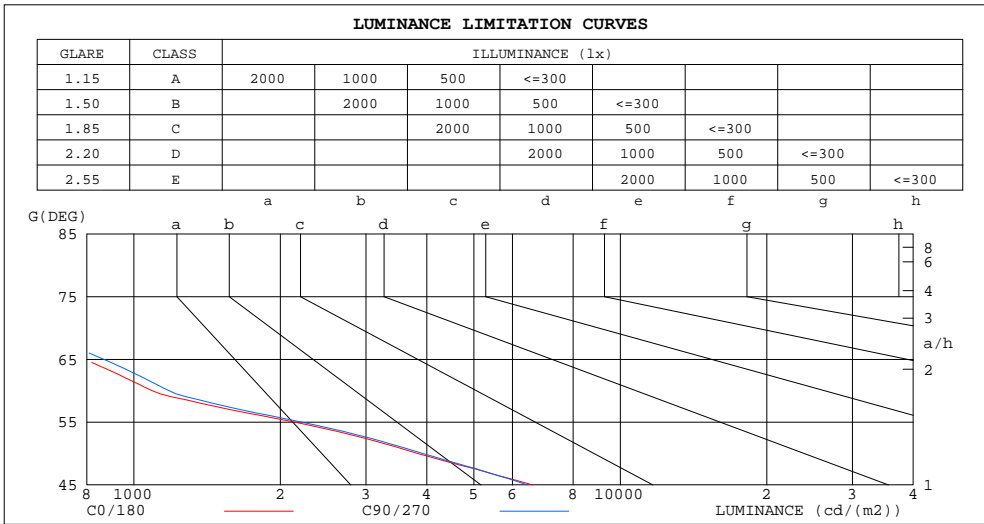

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	92	70
80	84	68
75	301	329
70	533	588
65	791	867
60	1090	1182
55	2137	2208
50	3827	3921
45	6596	6441


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2023-07-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:58%
 Test Distance:9.767m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.09	1.10	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.07	1.04	1.01	1.05	1.03	1.00	1.02	.99	.98	.99	.98	.96	.97	.95	.94	.93
3.0	1.02	.98	.95	1.01	.97	.95	.98	.95	.93	.96	.94	.92	.94	.92	.90	.89
4.0	.98	.94	.91	.97	.93	.90	.95	.92	.89	.93	.90	.88	.91	.89	.87	.86
5.0	.94	.90	.86	.93	.89	.86	.91	.88	.85	.90	.87	.85	.89	.86	.84	.83
6.0	.90	.86	.83	.90	.86	.83	.88	.85	.82	.87	.84	.82	.86	.83	.81	.80
7.0	.87	.83	.80	.87	.83	.80	.86	.82	.79	.85	.81	.79	.84	.81	.79	.77
8.0	.84	.80	.77	.84	.80	.77	.83	.79	.77	.82	.79	.76	.81	.78	.76	.75
9.0	.82	.77	.75	.81	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.74	.73
10.0	.79	.75	.72	.79	.75	.72	.78	.75	.72	.78	.74	.72	.77	.74	.72	.71

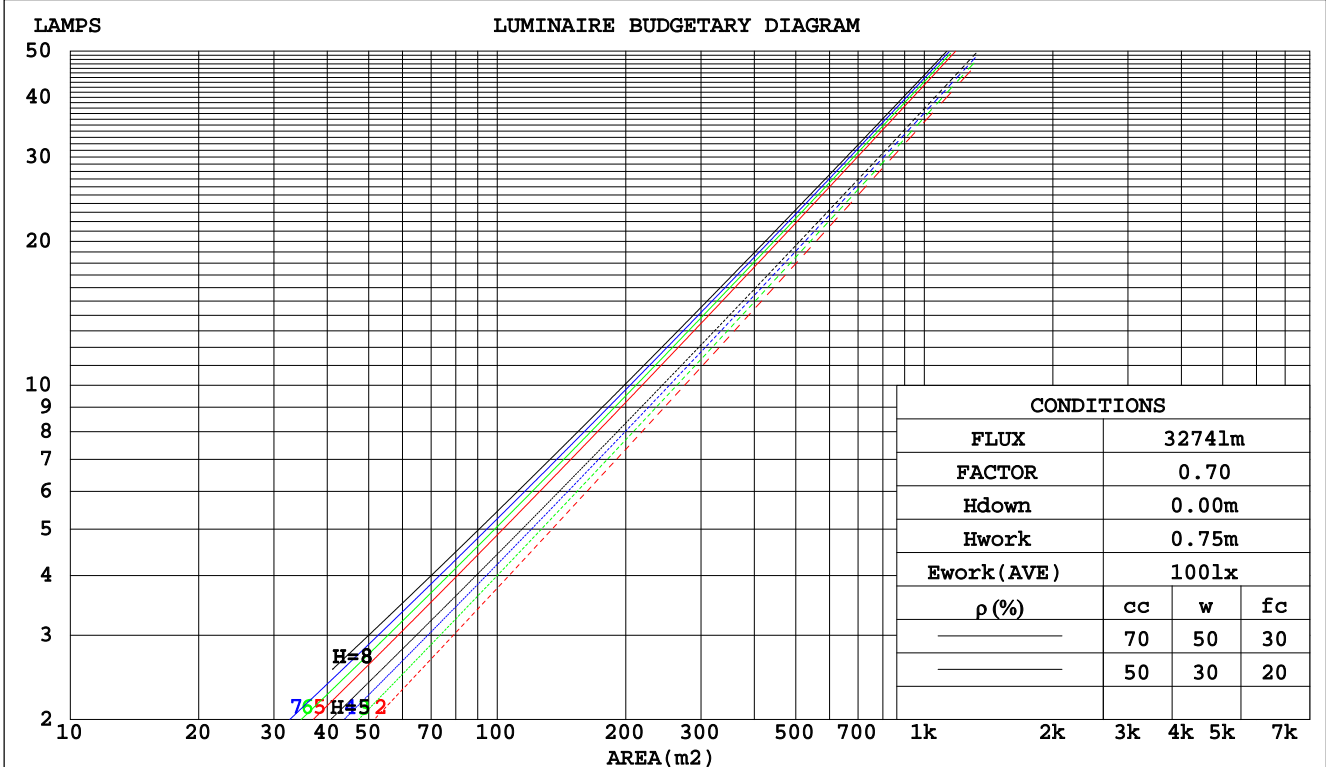

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jasoan
Test Date:2023-07-09

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:9.767m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.142	.081	.026	.136	.077	.025	.123	.071	.023	.112	.064	.021	.101	.059	.019	
2.0	.133	.073	.022	.127	.070	.022	.117	.065	.020	.107	.060	.019	.099	.056	.018	
3.0	.124	.066	.020	.119	.064	.019	.111	.060	.018	.103	.056	.017	.095	.053	.016	
4.0	.116	.061	.018	.113	.059	.017	.105	.056	.017	.099	.053	.016	.092	.050	.015	
5.0	.110	.056	.016	.107	.055	.016	.100	.052	.015	.095	.050	.015	.089	.048	.014	
6.0	.104	.052	.015	.101	.051	.015	.096	.049	.014	.091	.047	.014	.086	.045	.013	
7.0	.099	.049	.014	.096	.048	.014	.092	.046	.013	.087	.045	.013	.083	.043	.013	
8.0	.094	.046	.013	.092	.045	.013	.088	.044	.013	.084	.043	.012	.081	.041	.012	
9.0	.090	.044	.012	.088	.043	.012	.085	.042	.012	.081	.041	.012	.078	.040	.011	
10.0	.086	.041	.012	.085	.041	.011	.081	.040	.011	.078	.039	.011	.076	.038	.011	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.151	.133	.117	.129	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.014	
3.0	.136	.113	.095	.117	.098	.082	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.124	.098	.078	.107	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009	
5.0	.114	.086	.065	.098	.074	.057	.067	.052	.040	.039	.030	.024	.013	.010	.008	
6.0	.105	.076	.055	.090	.066	.048	.062	.046	.034	.036	.027	.020	.012	.009	.007	
7.0	.098	.068	.047	.084	.059	.041	.058	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.091	.061	.040	.079	.053	.035	.054	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.086	.055	.035	.074	.048	.031	.051	.034	.022	.030	.020	.013	.010	.007	.004	
10.0	.081	.051	.031	.070	.044	.027	.048	.031	.019	.028	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2023-07-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:58%
 Test Distance:9.767m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.3	5.9	5.5	6.1	6.2	5.1	5.8	5.3	5.9	6.1
3H	5.2	5.8	5.4	6.0	6.2	5.0	5.7	5.3	5.9	6.0
4H	5.1	5.7	5.4	5.9	6.1	5.0	5.6	5.2	5.8	6.0
6H	5.0	5.6	5.3	5.8	6.1	4.9	5.5	5.2	5.7	5.9
8H	5.0	5.5	5.3	5.8	6.0	4.8	5.4	5.1	5.6	5.9
12H	4.9	5.5	5.2	5.7	6.0	4.8	5.3	5.1	5.6	5.9
4H 2H	5.1	5.7	5.4	5.9	6.1	5.0	5.6	5.2	5.8	6.0
3H	5.0	5.5	5.3	5.8	6.1	4.9	5.4	5.2	5.7	5.9
4H	4.9	5.4	5.3	5.7	6.0	4.8	5.3	5.1	5.6	5.9
6H	4.8	5.3	5.2	5.6	5.9	4.7	5.1	5.1	5.5	5.8
8H	4.8	5.2	5.2	5.5	5.9	4.6	5.0	5.0	5.4	5.8
12H	4.7	5.1	5.1	5.5	5.8	4.6	5.0	5.0	5.3	5.7
8H 4H	4.8	5.2	5.2	5.5	5.9	4.7	5.1	5.0	5.4	5.8
6H	4.7	5.0	5.1	5.4	5.8	4.5	4.9	5.0	5.3	5.7
8H	4.6	4.9	5.1	5.3	5.8	4.5	4.8	4.9	5.2	5.6
12H	4.5	4.8	5.0	5.2	5.7	4.4	4.7	4.9	5.1	5.6
12H 4H	4.7	5.1	5.1	5.5	5.8	4.6	5.0	5.0	5.3	5.7
6H	4.6	4.9	5.1	5.3	5.8	4.5	4.8	4.9	5.2	5.6
8H	4.5	4.8	5.0	5.2	5.7	4.4	4.7	4.9	5.1	5.6
Variations with the observer position at spacings:										
S = 1.0H	+ 2.4 / - 6.5					+ 2.2 / - 6.1				
1.5H	+ 3.5 / - 5.0					+ 3.1 / - 4.9				
2.0H	+ 5.2 / - 6.1					+ 5.0 / - 6.0				

CIE Pub.117, 3274 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.1)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2023-07-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:58%
 Test Distance:9.767m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	80	89	83	80	88	83	80	76
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	95	92	100	95	92	98	95	91	88
1.25	104	100	96	103	99	96	102	98	95	91
1.50	107	103	99	106	102	99	104	100	98	94
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	115	113	112	113	112	110	109	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2023-07-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:58%
 Test Distance:9.767m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		

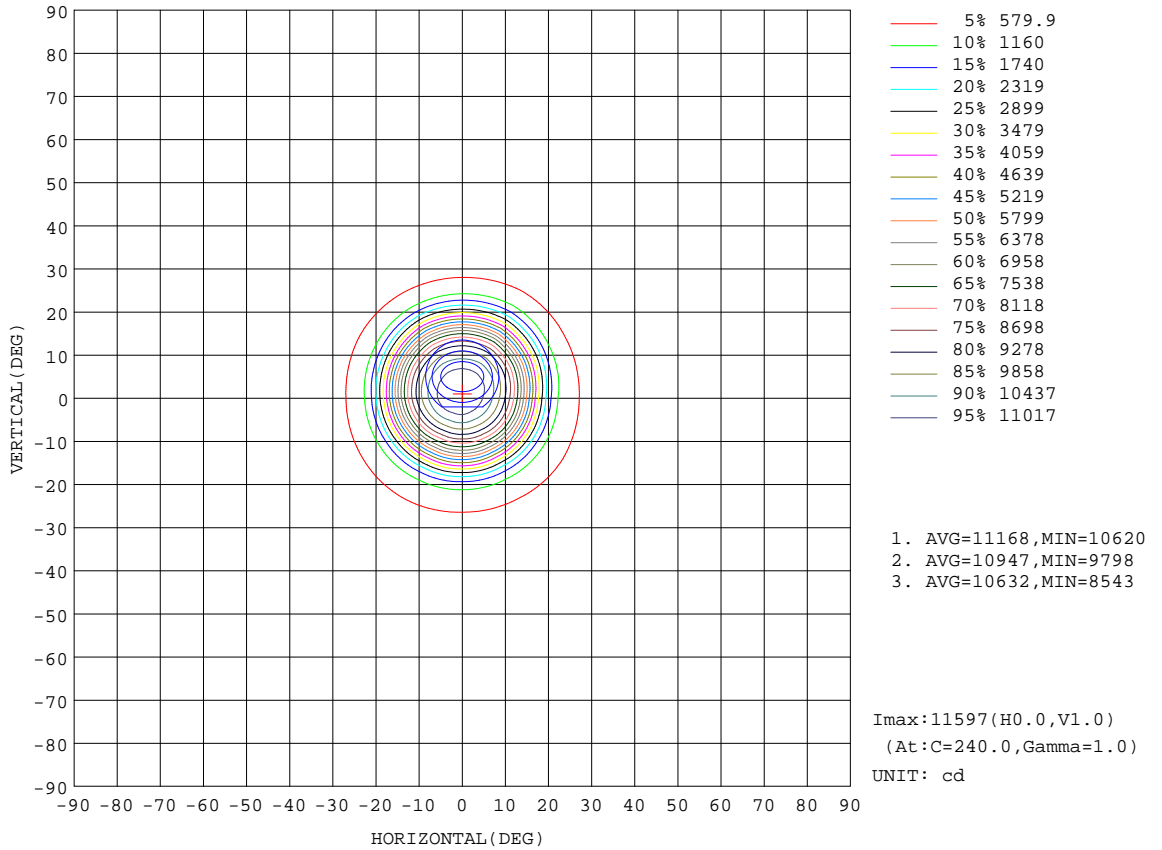


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jasoan
Test Date:2023-07-09

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:9.767m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		

Flux out:2003 lm

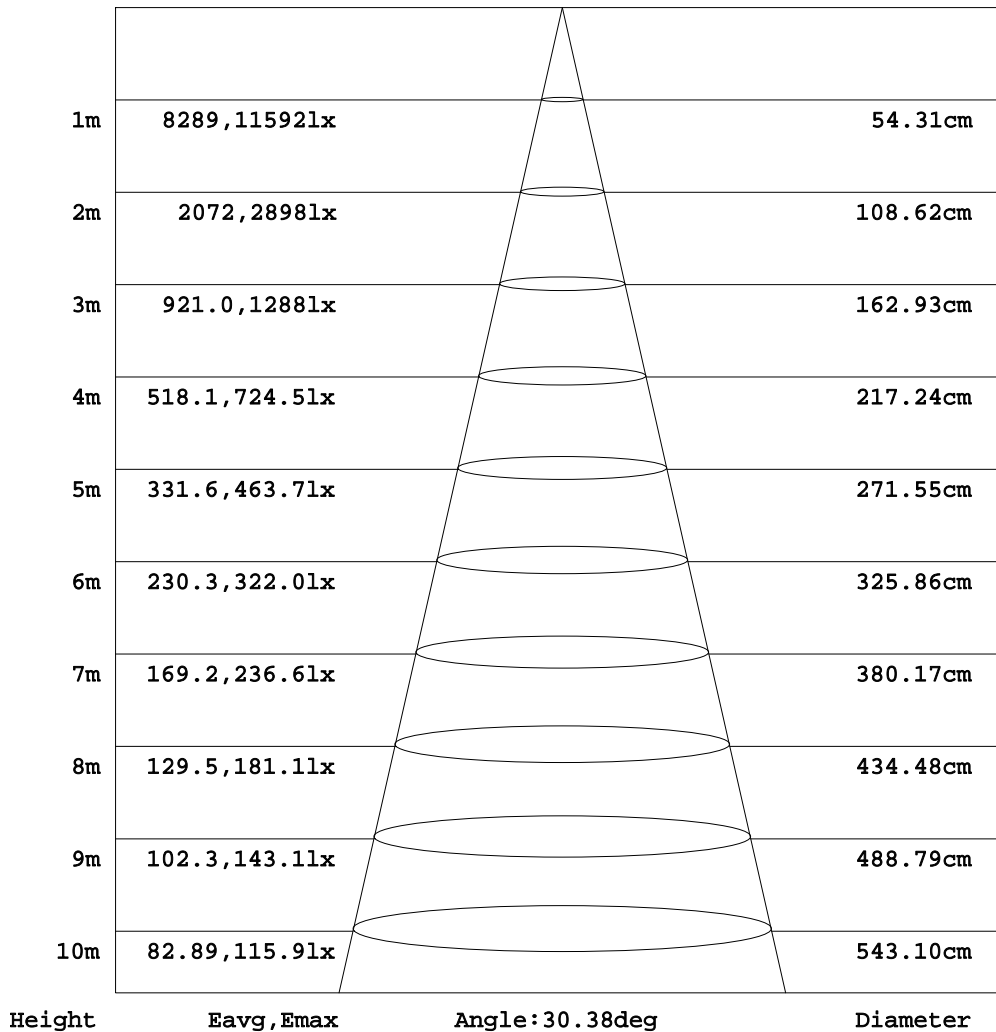


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jasoan
Test Date:2023-07-09

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:9.767m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		

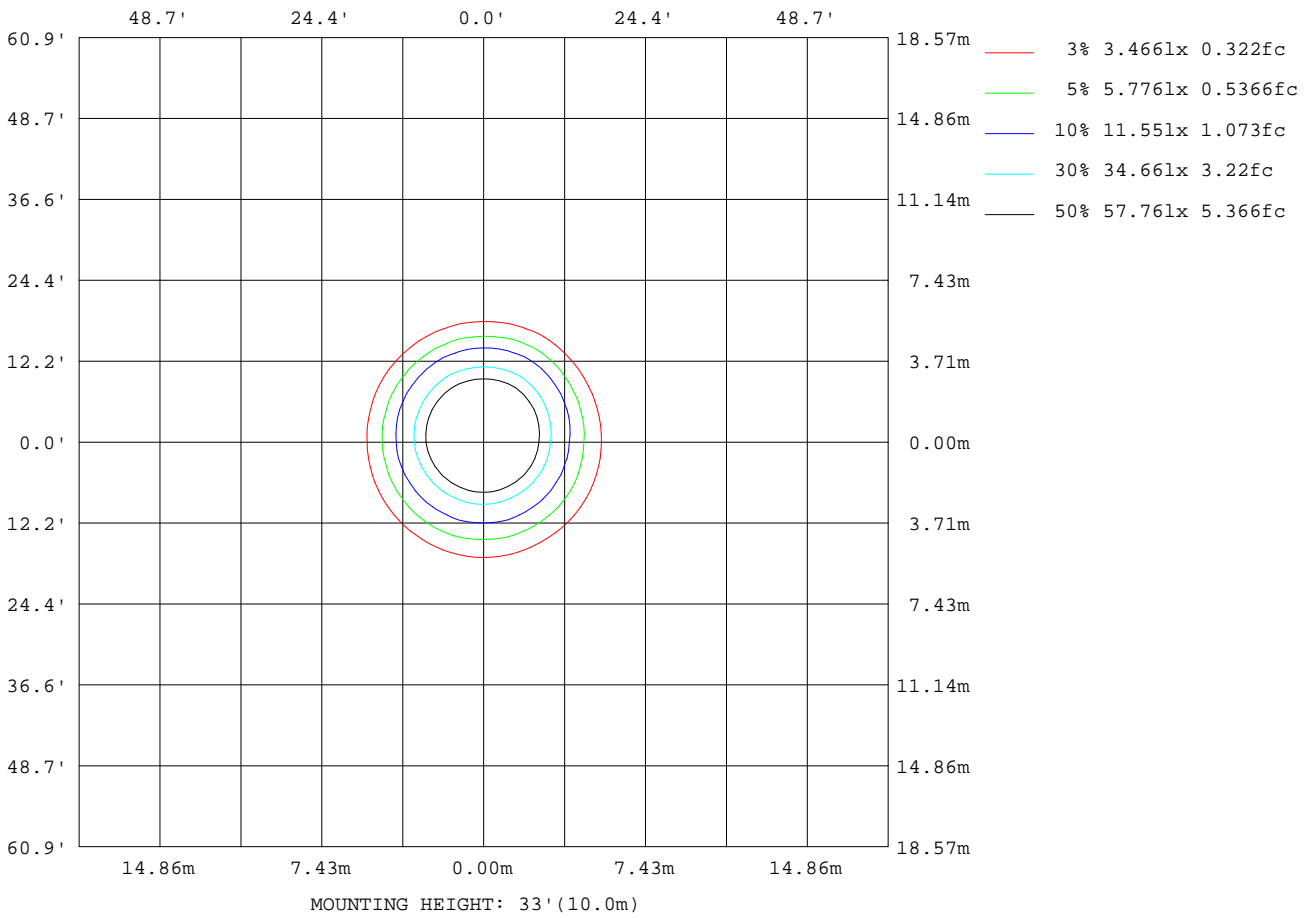

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2023-07-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:58%
 Test Distance:9.767m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		


AvgL	cd/m2
L_0~180 (65) av	816
L_0~180 (75) av	310
L_0~180 (85) av	79
L_90~270 (65) av	872
L_90~270 (75) av	341
L_90~270 (85) av	77
L_45 (65) av	854
L_45 (75) av	330
L_45 (85) av	77

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jasoan
Test Date:2023-07-09

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:9.767m [K=1.0000]
Remarks:

Planar Illuminance Curve

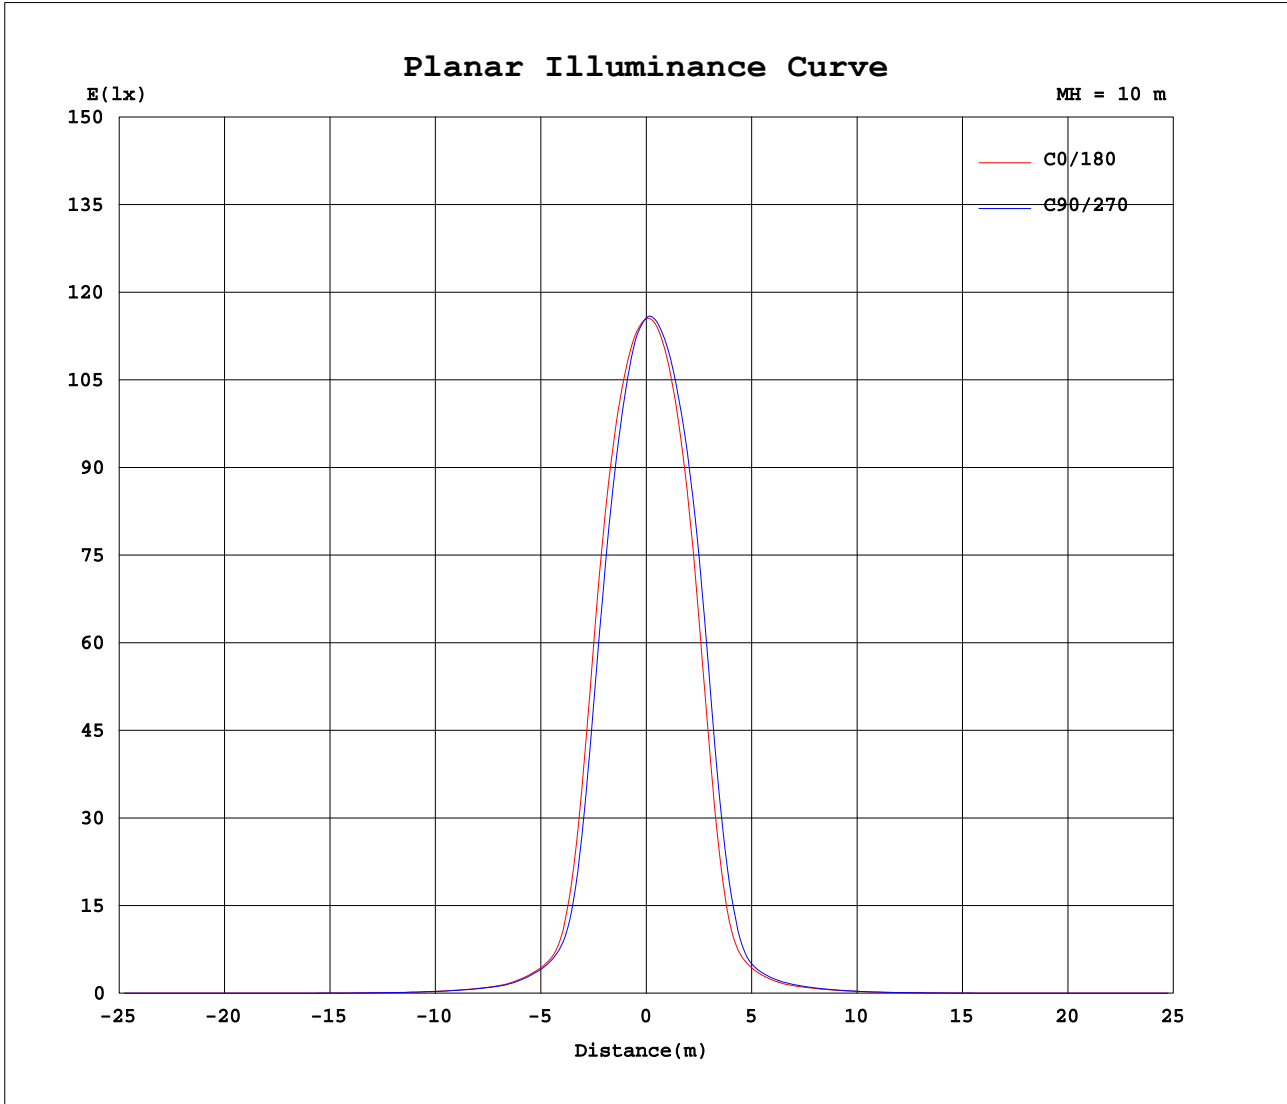

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2023-07-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 58%
 Test Distance: 9.767m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.1278A P:27.64W PF:0.9789 Freq:49.90Hz Lamp Flux:3274.26x1 lm		
NAME: T150 Pro-24W-940-30	TYPE:Downlight	SERIAL No.:
SPEC.:4000K	DIM.: φ160mm*H100mm	
MFR.: NEKO LIGHTING AG		

Table--1

UNIT: x10cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1156	1156	1156	1156	1156	1156	1156	1156	1156	1156	1156	1156						
5	1097	1080	1065	1066	1073	1096	1117	1127	1135	1132	1130	1116						
10	923	886	847	837	849	903	958	994	1018	1016	1016	979						
15	569	514	464	460	476	539	622	695	748	751	748	670						
20	199	171	154	149	159	184	230	283	334	335	341	275						
25	73.1	72.5	68.3	68.0	69.8	71.4	75.5	82.8	90.9	95.3	99.1	82.0						
30	42.4	40.9	39.0	39.6	37.5	38.5	40.3	43.8	45.3	45.8	46.8	43.5						
35	24.1	22.6	22.2	22.3	22.0	22.8	23.7	24.7	26.1	27.2	27.0	25.9						
40	15.7	14.9	14.8	14.8	14.5	14.9	15.6	15.6	16.5	17.1	17.1	16.6						
45	9.38	9.02	9.00	9.15	8.92	9.03	9.47	9.37	9.79	10.1	10.2	9.91						
50	4.95	4.86	4.89	5.06	5.01	4.98	5.06	5.01	5.05	5.10	5.37	5.16						
55	2.47	2.41	2.41	2.54	2.56	2.55	2.61	2.57	2.59	2.64	2.81	2.66						
60	1.10	1.08	1.10	1.19	1.22	1.18	1.16	1.15	1.16	1.20	1.27	1.18						
65	0.67	0.67	0.68	0.74	0.76	0.73	0.71	0.71	0.72	0.74	0.79	0.73						
70	0.37	0.36	0.37	0.40	0.42	0.40	0.39	0.39	0.40	0.42	0.44	0.40						
75	0.16	0.15	0.16	0.17	0.18	0.17	0.17	0.17	0.17	0.18	0.20	0.18						
80	0.03	0.02	0.03	0.02	0.03	0.02	0.03	0.03	0.03	0.03	0.03	0.03						
85	0.02	0.01	0.02	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01						
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01						

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 30.0DEG	γ Interval: 0.5DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Temperature:25.3DEG	Humidity:58%
Operators:Jasoan	Test Distance:9.767m [K=1.0000]
Test Date:2023-07-09	Remarks: