
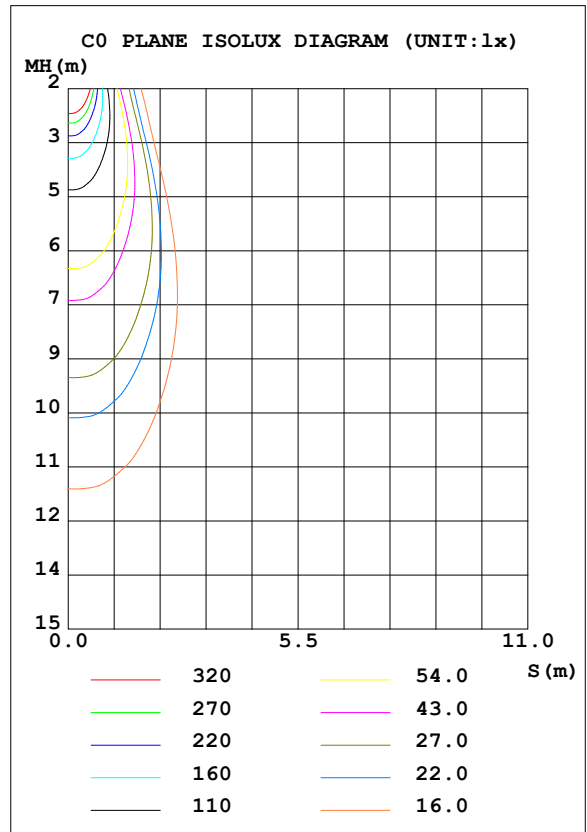


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 86.25 lm/W			
MODEL	2700K	I <sub>max</sub> (cd)	2165	S/MH (C0/180)	0.55
NOMINAL POWER (W)	14	LOR (%)	100.0	S/MH (C90/270)	0.54
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1181.3	η UP, DN (C0-180)	0.0, 52.5
NOMINAL FLUX (lm)	1181.27	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 47.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	100.0	CIBSE SHR MAX	0.60

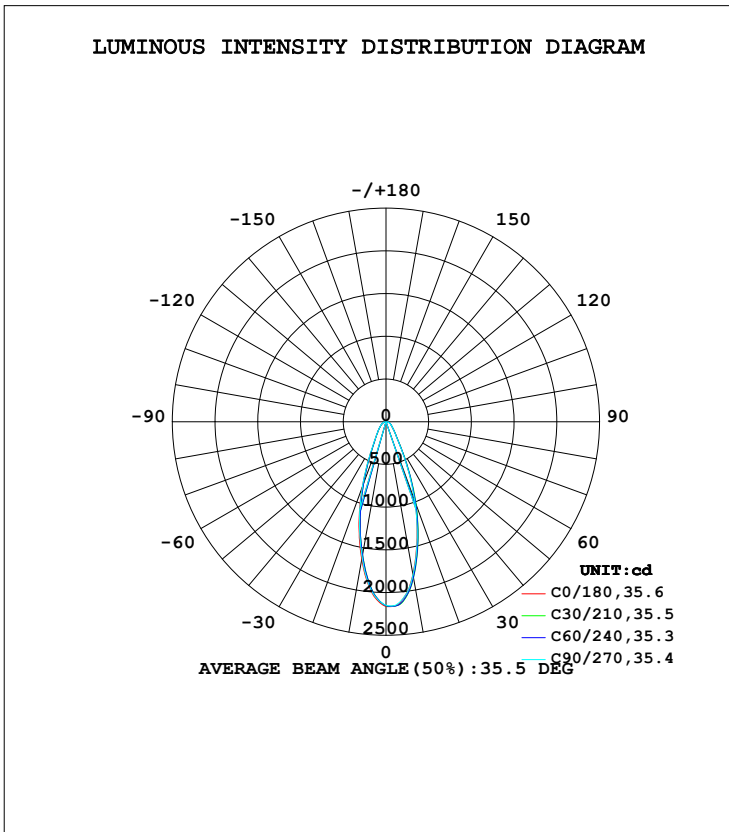

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Jasoan  
 Test Date: 2022-11-28

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity: 58%  
 Test Distance: 8.967m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1815	1853	1822	1704	1635	1582	1612	1724	0- 10	184.3	184.3	15.6,15.6
20	994.1	1024	981.2	868.7	808.5	768.3	807.2	908.9	10- 20	357.6	542.0	45.9,45.9
30	345.5	354.4	339.8	302.2	281.5	273.0	285.8	318.3	20- 30	251.4	793.4	67.2,67.2
40	158.7	158.0	156.4	151.0	146.4	145.7	147.7	155.9	30- 40	133.2	926.6	78.4,78.4
50	96.53	95.14	95.42	93.17	91.04	90.59	93.45	97.15	40- 50	91.98	1019	86.2,86.2
60	67.44	66.50	66.07	62.75	59.92	59.57	62.64	66.75	50- 60	69.49	1088	92.1,92.1
70	45.65	45.80	44.28	40.01	36.87	36.15	38.82	43.36	60- 70	51.88	1140	96.5,96.5
80	23.93	24.94	22.75	15.89	12.61	11.78	13.74	19.29	70- 80	32.00	1172	99.2,99.2
90	4.074	4.488	2.881	0.1988	0.2614	0.2832	0.2560	1.422	80- 90	9.281	1181	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 976.16 lm

%lum = 82.6%

%lamp = 82.6%

Conical surface Flux(120deg): 1088.1 lm

%lum = 92.1%


%lamp = 92.1%

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jasoan  
Test Date:2022-11-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:8.967m [K=1.0000]  
Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		

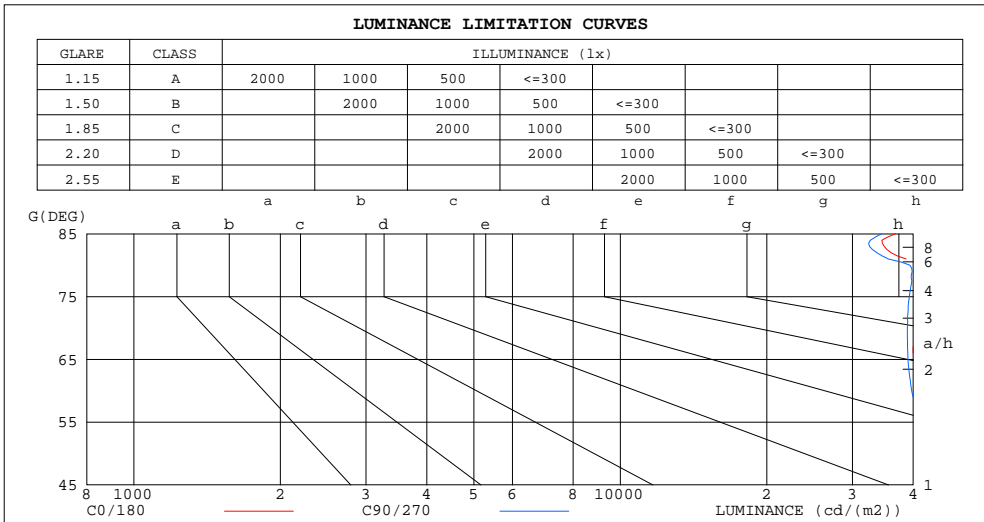

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	36760	34381
80	41429	39389
75	40735	39271
70	40119	38920
65	40017	39019
60	40548	39719
55	41856	41297
50	45144	44622
45	51405	50829


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2022-11-28

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:58%  
 Test Distance:8.967m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.04	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.96	.94	.93	.91
2.0	1.00	.96	.92	.99	.94	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.93	.87	.83	.91	.86	.82	.89	.84	.81	.86	.83	.79	.84	.81	.78	.77
4.0	.86	.80	.76	.85	.80	.75	.83	.78	.74	.81	.77	.73	.79	.76	.73	.71
5.0	.81	.75	.70	.80	.74	.70	.78	.73	.69	.76	.72	.68	.75	.71	.68	.66
6.0	.76	.70	.65	.75	.69	.65	.74	.68	.65	.72	.68	.64	.71	.67	.64	.62
7.0	.72	.66	.61	.71	.65	.61	.70	.65	.61	.69	.64	.60	.68	.63	.60	.59
8.0	.68	.62	.58	.68	.62	.58	.66	.61	.57	.65	.61	.57	.64	.60	.57	.55
9.0	.65	.59	.55	.64	.58	.55	.63	.58	.54	.62	.58	.54	.62	.57	.54	.53
10.0	.62	.56	.52	.61	.56	.52	.60	.55	.52	.60	.55	.52	.59	.55	.51	.50

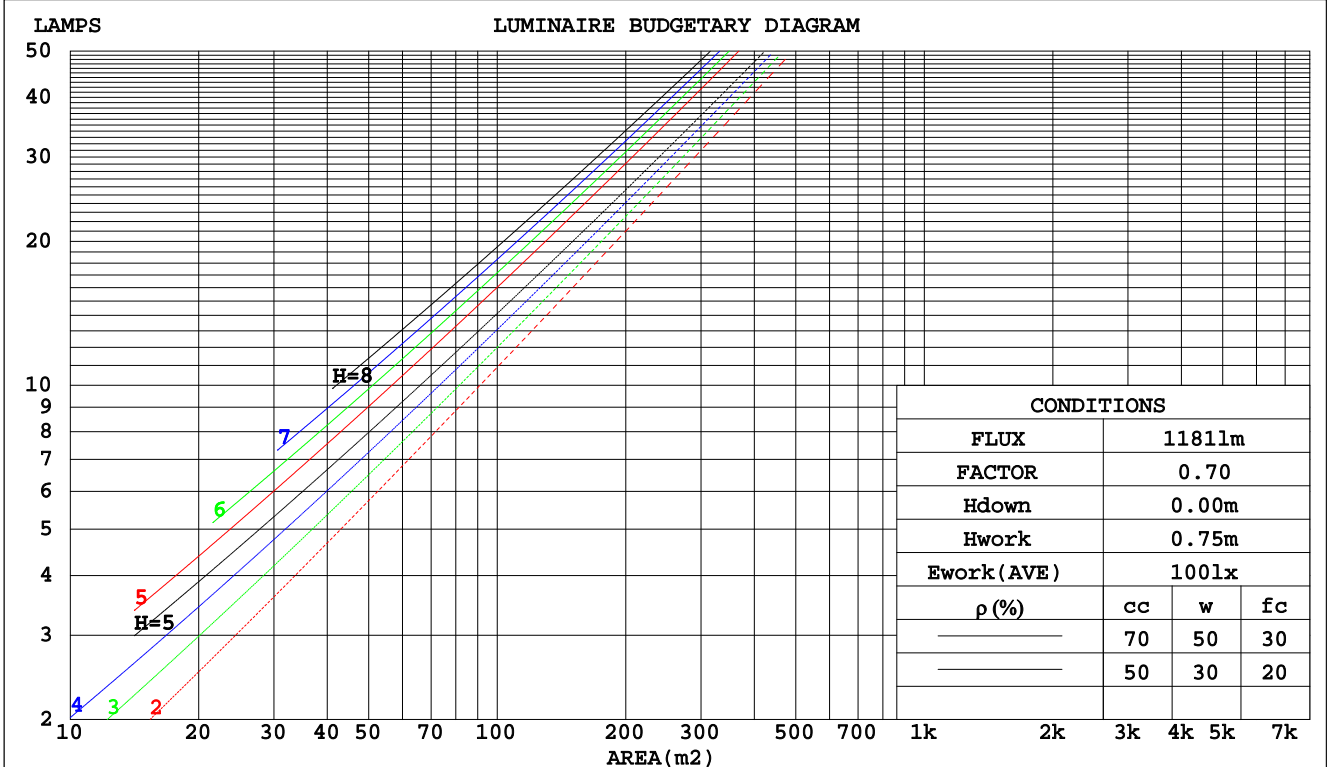

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2022-11-28

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:58%  
 Test Distance:8.967m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.210	.119	.038	.203	.116	.037	.190	.109	.035	.179	.103	.033	.168	.097	.031	
2.0	.197	.108	.033	.191	.105	.032	.180	.100	.031	.170	.096	.030	.161	.091	.029	
3.0	.184	.098	.029	.179	.096	.029	.169	.092	.028	.161	.088	.027	.153	.085	.026	
4.0	.171	.089	.026	.167	.087	.026	.159	.084	.025	.151	.081	.025	.144	.078	.024	
5.0	.160	.082	.024	.156	.080	.023	.149	.078	.023	.143	.075	.022	.137	.073	.022	
6.0	.150	.075	.022	.147	.074	.021	.141	.072	.021	.135	.070	.021	.130	.068	.020	
7.0	.142	.070	.020	.139	.069	.020	.133	.067	.019	.128	.066	.019	.123	.064	.019	
8.0	.134	.065	.018	.131	.065	.018	.126	.063	.018	.122	.062	.018	.118	.060	.018	
9.0	.127	.061	.017	.125	.061	.017	.120	.059	.017	.116	.058	.017	.112	.057	.016	
10.0	.121	.058	.016	.119	.057	.016	.115	.056	.016	.111	.055	.016	.108	.054	.016	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.157	.142	.148	.135	.122	.101	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.160	.132	.109	.137	.114	.095	.094	.079	.066	.054	.046	.039	.017	.015	.013	
3.0	.148	.114	.087	.127	.098	.075	.087	.068	.053	.050	.040	.031	.016	.013	.010	
4.0	.138	.099	.070	.118	.086	.061	.081	.060	.043	.047	.035	.025	.015	.011	.008	
5.0	.129	.088	.058	.111	.076	.050	.076	.053	.035	.044	.031	.021	.014	.010	.007	
6.0	.121	.079	.048	.104	.068	.042	.072	.048	.030	.042	.028	.018	.013	.009	.006	
7.0	.114	.071	.041	.098	.062	.036	.068	.043	.025	.039	.025	.015	.013	.008	.005	
8.0	.108	.065	.035	.093	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.102	.059	.031	.088	.052	.027	.061	.036	.019	.035	.021	.011	.011	.007	.004	
10.0	.097	.055	.027	.084	.048	.024	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2022-11-28

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:58%  
 Test Distance:8.967m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.5	23.5	22.7	23.7	23.9	22.4	23.4	22.6	23.6	23.8
3H	24.0	25.0	24.3	25.2	25.4	23.9	24.8	24.2	25.0	25.2
4H	24.7	25.6	25.0	25.9	26.1	24.6	25.5	24.9	25.7	26.0
6H	25.4	26.2	25.7	26.5	26.7	25.2	26.1	25.5	26.3	26.6
8H	25.6	26.4	25.9	26.7	26.9	25.4	26.2	25.7	26.5	26.7
12H	25.7	26.5	26.0	26.8	27.1	25.5	26.3	25.8	26.6	26.9
4H 2H	23.1	24.0	23.3	24.2	24.4	23.0	23.9	23.3	24.1	24.4
3H	24.8	25.6	25.1	25.9	26.2	24.7	25.5	25.0	25.8	26.1
4H	25.7	26.4	26.1	26.7	27.1	25.6	26.3	25.9	26.6	26.9
6H	26.5	27.2	26.9	27.5	27.9	26.4	27.0	26.7	27.3	27.7
8H	26.8	27.4	27.2	27.7	28.1	26.6	27.2	27.0	27.5	27.9
12H	26.9	27.5	27.4	27.9	28.3	26.7	27.3	27.2	27.7	28.1
8H 4H	26.1	26.7	26.5	27.0	27.4	25.9	26.5	26.3	26.9	27.3
6H	27.1	27.6	27.5	28.0	28.4	26.9	27.4	27.3	27.8	28.2
8H	27.4	27.8	27.9	28.3	28.7	27.2	27.7	27.7	28.1	28.5
12H	27.7	28.0	28.1	28.5	29.0	27.5	27.8	27.9	28.3	28.8
12H 4H	26.1	26.6	26.5	27.0	27.4	26.0	26.5	26.4	26.9	27.3
6H	27.1	27.6	27.6	28.0	28.4	27.0	27.4	27.4	27.9	28.3
8H	27.5	27.9	28.0	28.3	28.8	27.4	27.7	27.8	28.2	28.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
2.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				

CIE Pub.117, 1181 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.6)

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2022-11-28

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:58%  
 Test Distance:8.967m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	78	70	66	78	70	66	77	70	65	61
0.80	86	79	74	86	78	74	84	78	73	69
1.00	92	85	80	91	84	80	89	85	79	74
1.25	97	90	85	96	89	85	94	88	84	79
1.50	100	94	89	99	93	89	96	92	88	82
2.00	104	99	94	103	98	94	100	96	92	86
2.50	107	102	98	105	100	97	102	98	95	88
3.00	109	104	101	107	103	99	103	100	97	90
4.00	111	108	105	109	106	103	105	103	101	93
5.00	113	110	107	111	108	106	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2022-11-28

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:58%  
 Test Distance:8.967m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		

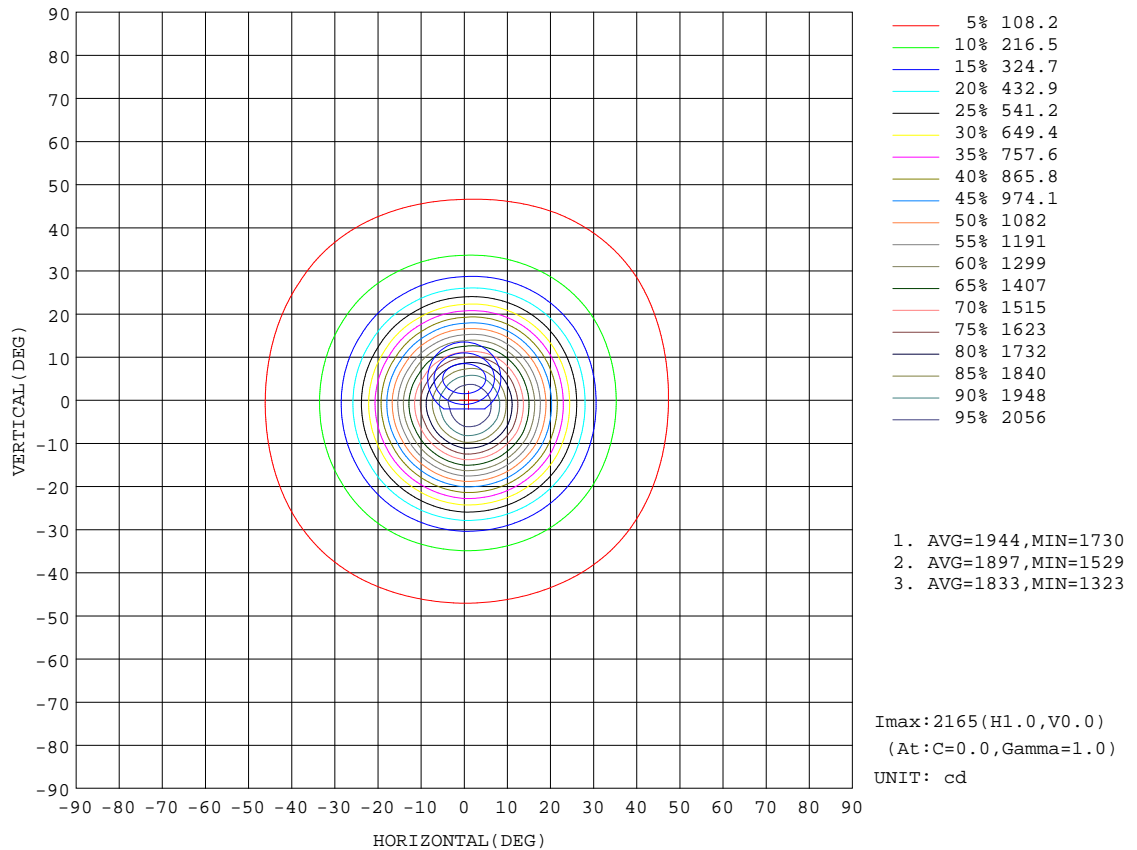

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2022-11-28


γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:58%  
 Test Distance:8.967m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		

Flux out:472.4 lm

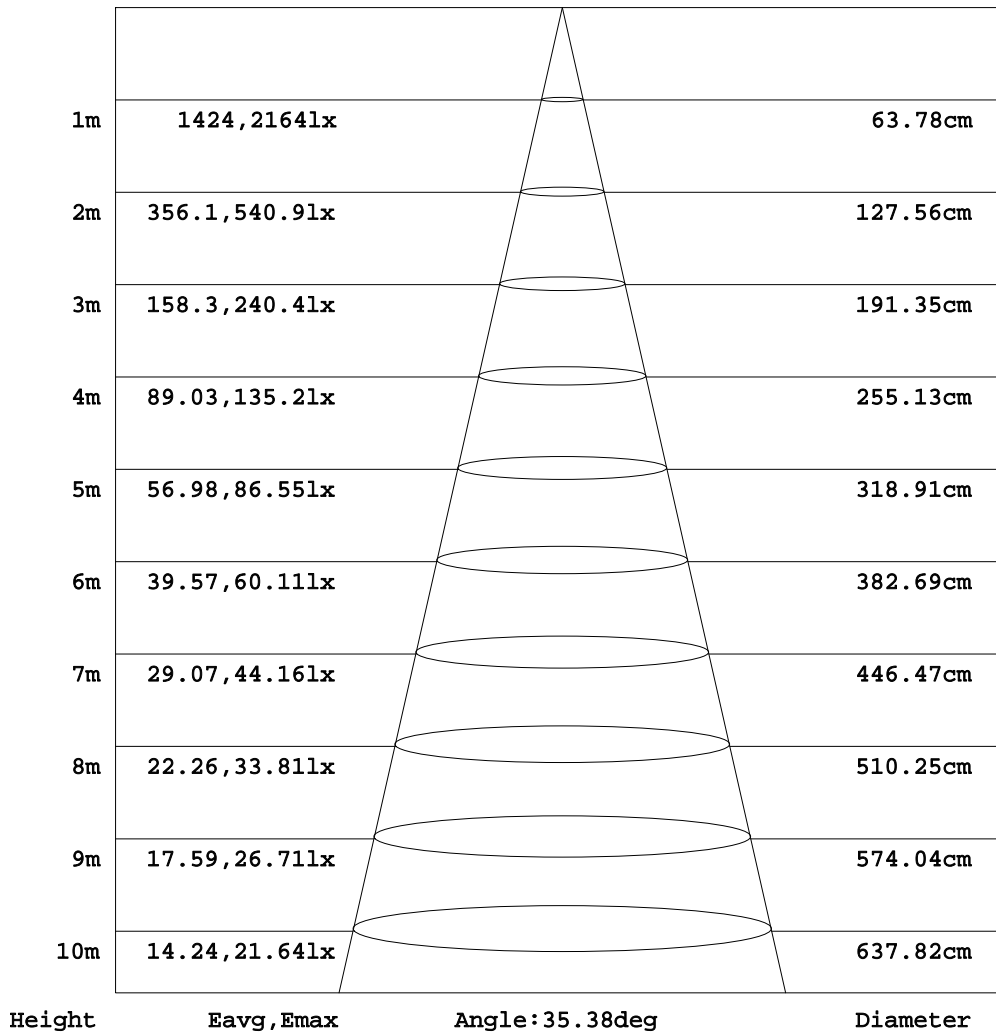


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jasoan  
Test Date:2022-11-28

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:8.967m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		

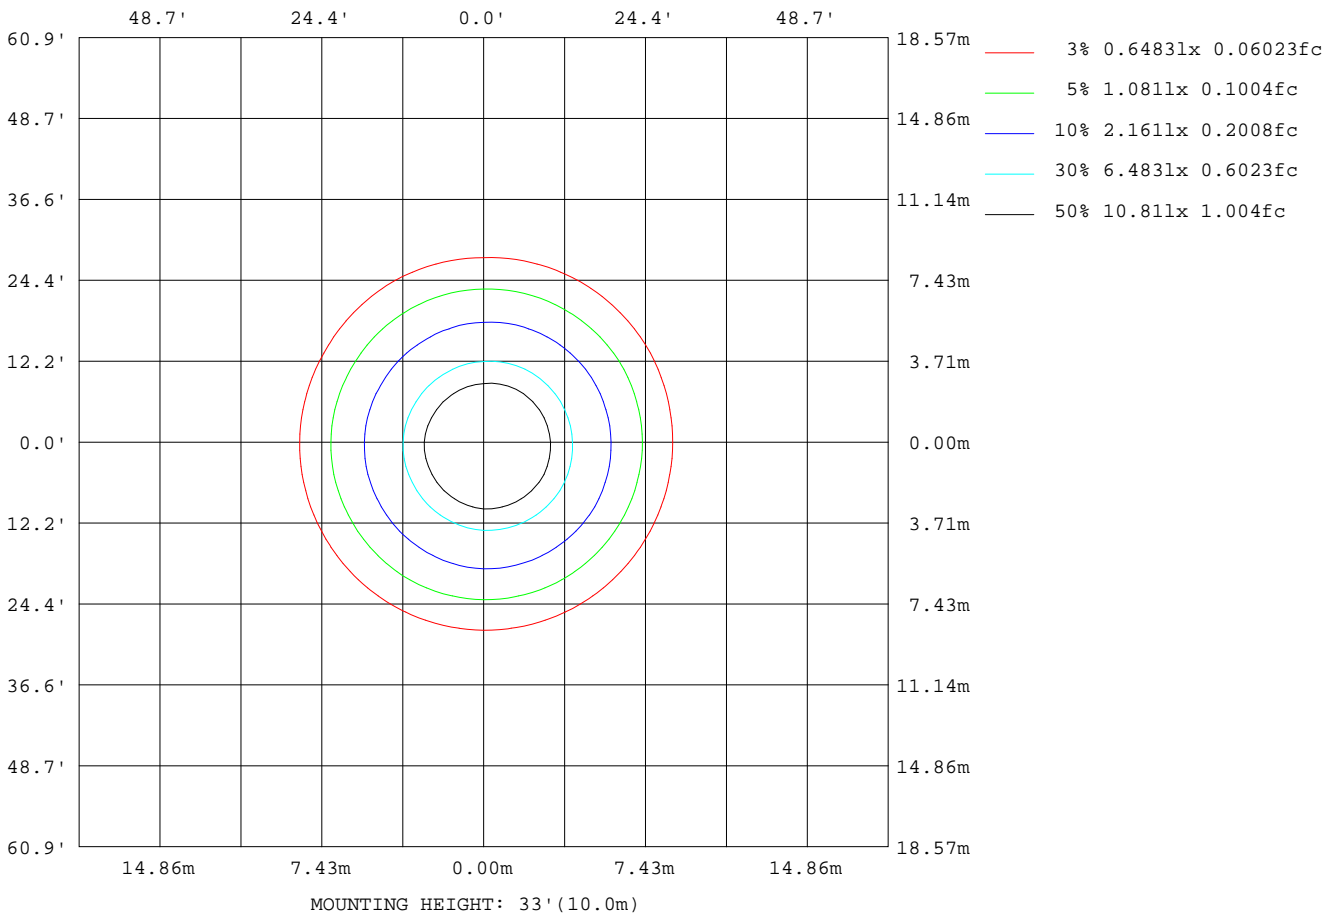

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Jasoan  
 Test Date:2022-11-28

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:58%  
 Test Distance:8.967m [K=1.0000]  
 Remarks:

LED Avg.L Report

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		


AvgL	cd/m2
L_0~180 (65) av	37047
L_0~180 (75) av	35629
L_0~180 (85) av	28289
L_90~270 (65) av	37463
L_90~270 (75) av	35781
L_90~270 (85) av	27904
L_45 (65) av	37167
L_45 (75) av	35708
L_45 (85) av	27706

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jasoan  
Test Date:2022-11-28

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:8.967m [K=1.0000]  
Remarks:

Planar Illuminance Curve

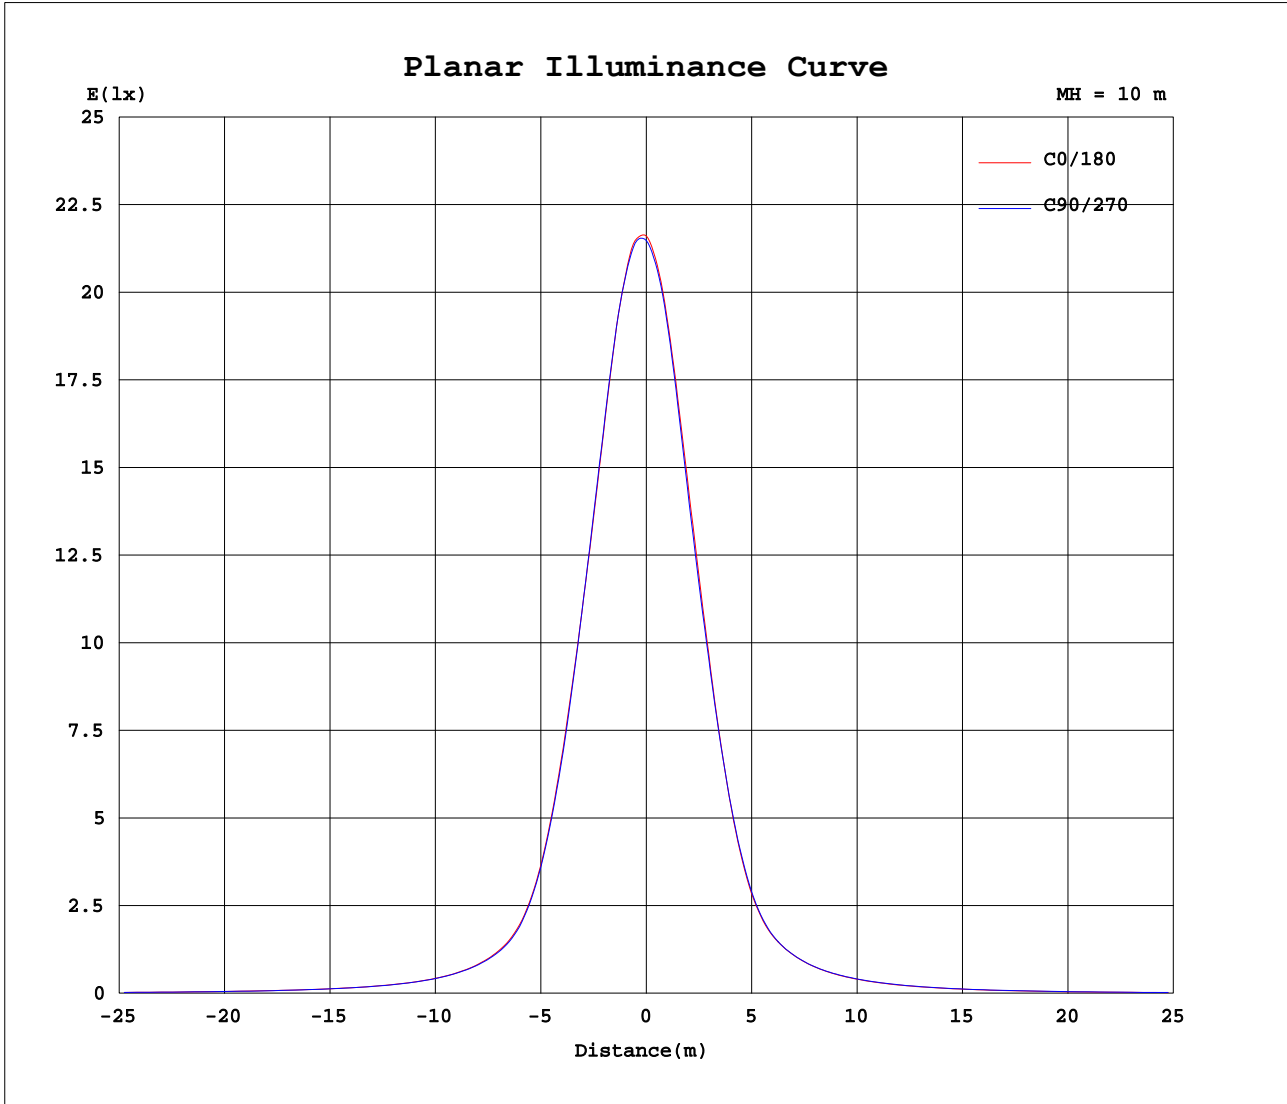

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Jasoan  
 Test Date: 2022-11-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity: 58%  
 Test Distance: 8.967m [K=1.0000]  
 Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:221.0V I:0.1071A P:13.70W PF:0.5786 Freq:49.99Hz Lamp Flux:1181.27x1 lm		
NAME: VIBES-V1RR-14W-927-36°	TYPE:Downlight	SERIAL No.:
SPEC.:2700K	DIM.: φ77mm*H39mm*2	
MFR.: NEKO LIGHTING AG		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2161	2155	2153	2148	2145	2143	2161	2155	2153	2148	2145	2143						
5	2105	2130	2121	2098	2050	2009	1993	1959	1963	1981	2025	2058						
10	1815	1856	1849	1822	1740	1669	1635	1581	1584	1612	1694	1755						
15	1405	1450	1441	1412	1327	1255	1224	1170	1168	1203	1283	1347						
20	994	1031	1016	981	901	836	808	768	769	807	878	940						
25	610	637	624	601	545	496	474	449	454	482	530	576						
30	345	359	350	340	313	291	281	273	273	286	305	331						
35	220	220	219	215	209	200	197	193	194	198	206	216						
40	159	158	158	156	153	149	146	144	147	148	154	158						
45	121	120	119	120	118	116	114	112	115	116	121	123						
50	96.5	95.7	94.5	95.4	94.0	92.4	91.0	89.8	91.4	93.4	96.7	97.6						
55	79.9	79.0	78.1	78.8	77.3	75.1	73.8	73.0	74.4	76.4	79.5	80.6						
60	67.4	66.9	66.1	66.1	64.1	61.4	59.9	58.9	60.3	62.6	66.0	67.5						
65	56.3	56.4	55.4	54.9	52.4	49.5	47.9	46.8	48.1	50.5	53.8	55.7						
70	45.6	46.3	45.3	44.3	41.5	38.5	36.9	35.6	36.7	38.8	42.2	44.6						
75	35.1	35.9	35.0	33.8	31.0	28.1	26.3	25.1	26.0	27.8	31.1	33.6						
80	23.9	25.3	24.6	22.8	17.5	14.3	12.6	11.5	12.0	13.7	17.2	21.4						
85	10.7	11.4	11.0	9.97	7.95	6.51	5.75	5.10	5.32	6.21	7.68	9.45						
90	4.07	4.61	4.37	2.88	0.25	0.15	0.26	0.30	0.26	0.26	0.26	2.59						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jasoan  
Test Date:2022-11-28

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:8.967m [K=1.0000]  
Remarks: