

NEKO/PURE
LED Tracklight





PURE Art

15W 950-1000lm


PURE S

15W 1200-1300lm
21W 1600-1700lm


PURE M

28W 2700-2900lm

Narrow, medium and wide beam angles are available for different lighting applications

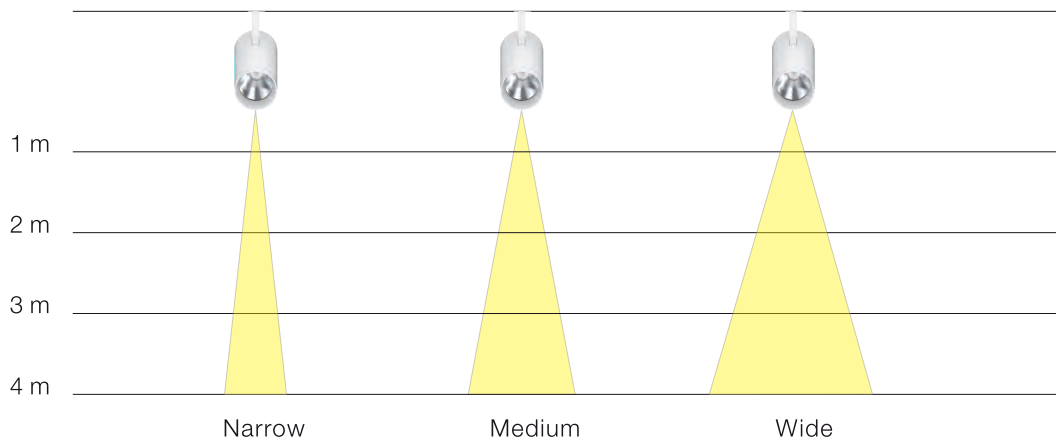

NEKO / PURE Art
LED Tracklight



15W | CRI90 / CRI80 | 2700K / 3000K / 4000K | 18° / 24° / 36° | CITIZEN Micro-Transistor | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815X-WB	
						24°	1100lm	900lm	PUA2- 9272415X-WB	
						36°	1100lm	900lm	PUA2- 9273615X-WB	
						3000K	18°	1200lm	950lm	PUA2- 9301815X-WB
						24°	1200lm	950lm	PUA2- 9302415X-WB	
						36°	1200lm	950lm	PUA2- 9303615X-WB	
						4000K	18°	1300lm	1000lm	PUA2-940 1815X-WB
						24°	1300lm	1000lm	PUA2-940 2415X-WB	
						36°	1300lm	1000lm	PUA2-940 3615X-WB	



13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815X-BB	
						24°	1100lm	900lm	PUA2- 9272415X-BB	
						36°	1100lm	900lm	PUA2- 9273615X-BB	
						3000K	18°	1200lm	950lm	PUA2- 9301815X-BB
						24°	1200lm	950lm	PUA2- 9302415X-BB	
						36°	1200lm	950lm	PUA2- 9303615X-BB	
						4000K	18°	1300lm	1000lm	PUA2-940 1815X-BB
						24°	1300lm	1000lm	PUA2-940 2415X-BB	
						36°	1300lm	1000lm	PUA2-940 3615X-BB	

Code Remark: X=(ON-OFF) X=(Phase Dim)

Optional accessory




Code for PUA2-930 1815X-WB with Honeycomb
PUA2-930 1815X-WB-H

Honeycomb



NEKO / PURE S LED Tracklight



21W CRI90 2700K 15° **CITIZEN** UGR < 19 IP20 **5 YEARS** CB CE
15W CRI80 3000K 25° Micro-Hybrid-Technik **50,000h@L80B10** GUARANTEE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515X-WB						
						25°	1400lm	1100lm	PUS1-9272515X-WB						
						30°	1400lm	1100lm	PUS1-9273015X-WB						
						3000K	15°	1500lm	1200lm	PUS1-9301515X-WB					
							25°	1500lm	1200lm	PUS1-9302515X-WB					
							30°	1500lm	1200lm	PUS1-9303015X-WB					
						4000K	15°	1600lm	1300lm	PUS1-9401515X-WB					
							25°	1600lm	1300lm	PUS1-9402515X-WB					
							30°	1600lm	1300lm	PUS1-9403015X-WB					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2-9271521X-WB
												25°	1900lm	1500lm	PUS2-9272521X-WB
												30°	1900lm	1500lm	PUS2-9273021X-WB
3000K	15°	2000lm	1600lm	PUS2-9301521X-WB											
	25°	2000lm	1600lm	PUS2-9302521X-WB											
	30°	2000lm	1600lm	PUS2-9303021X-WB											
4000K	15°	2100lm	1700lm	PUS2-9401521X-WB											
	25°	2100lm	1700lm	PUS2-9402521X-WB											
	30°	2100lm	1700lm	PUS2-9403021X-WB											
13 W	15 W	36 V	350 mA	90	2700K							15°	1400lm	1100lm	PUS1-9271515X-BB
												25°	1400lm	1100lm	PUS1-9272515X-BB
												30°	1400lm	1100lm	PUS1-9273015X-BB
						3000K	15°	1500lm	1200lm	PUS1-9301515X-BB					
							25°	1500lm	1200lm	PUS1-9302515X-BB					
							30°	1500lm	1200lm	PUS1-9303015X-BB					
						4000K	15°	1600lm	1300lm	PUS1-9401515X-BB					
							25°	1600lm	1300lm	PUS1-9402515X-BB					
							30°	1600lm	1300lm	PUS1-9403015X-BB					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2-9271521X-BB
												25°	1900lm	1500lm	PUS2-9272521X-BB
												30°	1900lm	1500lm	PUS2-9273021X-BB
3000K	15°	2000lm	1600lm	PUS2-9301521X-BB											
	25°	2000lm	1600lm	PUS2-9302521X-BB											
	30°	2000lm	1600lm	PUS2-9303021X-BB											
4000K	15°	2100lm	1700lm	PUS2-9401521X-BB											
	25°	2100lm	1700lm	PUS2-9402521X-BB											
	30°	2100lm	1700lm	PUS2-9403021X-BB											

Code Remark: X=(ON-OFF) X=P(Phase Dim)


Optional accessory



Code for PUS1-930 1515X-WB with Honeycomb
PUS1-930 1515X-WB-H

Honeycomb

21W CRI90 2700K 15° CITIZEN GLOBAL™ UGR < 19 IP 20 DALI 5 YEAR GUARANTEE CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515D-WB						
						25°	1400lm	1100lm	PUS1-9272515D-WB						
						30°	1400lm	1100lm	PUS1-9273015D-WB						
						3000K	15°	1500lm	1200lm	PUS1-9301515D-WB					
							25°	1500lm	1200lm	PUS1-9302515D-WB					
							30°	1500lm	1200lm	PUS1-9303015D-WB					
						4000K	15°	1600lm	1300lm	PUS1-9401515D-WB					
							25°	1600lm	1300lm	PUS1-9402515D-WB					
							30°	1600lm	1300lm	PUS1-9403015D-WB					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2-9271521D-WB
												25°	1900lm	1500lm	PUS2-9272521D-WB
												30°	1900lm	1500lm	PUS2-9273021D-WB
3000K	15°	2000lm	1600lm	PUS2-9301521D-WB											
	25°	2000lm	1600lm	PUS2-9302521D-WB											
	30°	2000lm	1600lm	PUS2-9303021D-WB											
4000K	15°	2100lm	1700lm	PUS2-9401521D-WB											
	25°	2100lm	1700lm	PUS2-9402521D-WB											
	30°	2100lm	1700lm	PUS2-9403021D-WB											



13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515D-BB						
						25°	1400lm	1100lm	PUS1-9272515D-BB						
						30°	1400lm	1100lm	PUS1-9273015D-BB						
						3000K	15°	1500lm	1200lm	PUS1-9301515D-BB					
							25°	1500lm	1200lm	PUS1-9302515D-BB					
							30°	1500lm	1200lm	PUS1-9303015D-BB					
						4000K	15°	1600lm	1300lm	PUS1-9401515D-BB					
							25°	1600lm	1300lm	PUS1-9402515D-BB					
							30°	1600lm	1300lm	PUS1-9403015D-BB					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2-9271521D-BB
												25°	1900lm	1500lm	PUS2-9272521D-BB
												30°	1900lm	1500lm	PUS2-9273021D-BB
3000K	15°	2000lm	1600lm	PUS2-9301521D-BB											
	25°	2000lm	1600lm	PUS2-9302521D-BB											
	30°	2000lm	1600lm	PUS2-9303021D-BB											
4000K	15°	2100lm	1700lm	PUS2-9401521D-BB											
	25°	2100lm	1700lm	PUS2-9402521D-BB											
	30°	2100lm	1700lm	PUS2-9403021D-BB											

Code Remark: DALI Dim Version


Optional accessory



Code for PUS1-930 1515D-WB with Honeycomb
PUS1-930 1515D-WB -H

Honeycomb

NEKO / PURE M LED Tracklight



28W CRI90 CRI80 2700K 3000K 4000K 18° 30° 45° CITIZEN 50,000h@L80B10 UGR < 19 IP20 5 YEARS GUARANTEE CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828X-WB	
						30°	3200lm	2500lm	PUM1-9273028X-WB	
						45°	3200lm	2500lm	PUM1-9274528X-WB	
						3000K	18°	3400lm	2700lm	PUM1-9301828X-WB
							30°	3400lm	2700lm	PUM1-9303028X-WB
							45°	3400lm	2700lm	PUM1-9304528X-WB
						4000K	18°	3600lm	2900lm	PUM1-9401828X-WB
							30°	3600lm	2900lm	PUM1-9403028X-WB
							45°	3600lm	2900lm	PUM1-9404528X-WB



25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828X-WB	
						30°	3200lm	2500lm	PUM1-9273028X-WB	
						45°	3200lm	2500lm	PUM1-9274528X-WB	
						3000K	18°	3400lm	2700lm	PUM1-9301828X-WB
							30°	3400lm	2700lm	PUM1-9303028X-WB
							45°	3400lm	2700lm	PUM1-9304528X-WB
						4000K	18°	3600lm	2900lm	PUM1-9401828X-WB
							30°	3600lm	2900lm	PUM1-9403028X-WB
							45°	3600lm	2900lm	PUM1-9404528X-WB

Code Remark: X=F(ON-OFF) X=P(Phase Dim)


Optional accessory



Honeycomb

Code for PUM1-930 1828X-WB with Honeycomb
PUM1-930 1828X-WB-H

28W CRI90 CRI80 2700K 3000K 4000K 18° 30° 45° CITIZEN Micro-PrismTech 50,000h@L80B10 GLOBAL 星 UGR < 19 IP20 DALI 5 YEARS GUARANTEE CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828D-WB	
						30°	3200lm	2500lm	PUM1-9273028D-WB	
						45°	3200lm	2500lm	PUM1-9274528D-WB	
						3000K	18°	3400lm	2700lm	PUM1-9301828D-WB
							30°	3400lm	2700lm	PUM1-9303028D-WB
							45°	3400lm	2700lm	PUM1-9304528D-WB
						4000K	18°	3600lm	2900lm	PUM1-9401828D-WB
							30°	3600lm	2900lm	PUM1-9403028D-WB
							45°	3600lm	2900lm	PUM1-9404528D-WB

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828D-WB	
						30°	3200lm	2500lm	PUM1-9273028D-WB	
						45°	3200lm	2500lm	PUM1-9274528D-WB	
						3000K	18°	3400lm	2700lm	PUM1-9301828D-WB
							30°	3400lm	2700lm	PUM1-9303028D-WB
							45°	3400lm	2700lm	PUM1-9304528D-WB
						4000K	18°	3600lm	2900lm	PUM1-9401828D-WB
							30°	3600lm	2900lm	PUM1-9403028D-WB
							45°	3600lm	2900lm	PUM1-9404528D-WB

Code Remark: DALI Dim Version

Optional accessory



Honeycomb

Code for PUM1-930 1828D-WB with Honeycomb
PUM1-930 1828D-WB -H



NEKO / PURE-C

Ceiling Mounted PURE S Tracklight



21W CRI90 2700K 15° 50,000h@L80B10
 15W CRI80 3000K 25°
 4000K 30°


CITIZEN
 Micro-StreamTech


UGR < 19

IP20

5 YEARS GUARANTEE

CB CE



	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUC1-9271515X-WB
							25°	1400lm	1100lm	PUC1-9272515X-WB
							30°	1400lm	1100lm	PUC1-9273015X-WB
							3000K 15°	1500lm	1200lm	PUC1-9301515X-WB
							25°	1500lm	1200lm	PUC1-9302515X-WB
							30°	1500lm	1200lm	PUC1-9303015X-WB
	18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUC2-9271521X-WB
							25°	1900lm	1500lm	PUC2-9272521X-WB
							30°	1900lm	1500lm	PUC2-9273021X-WB
							3000K 15°	2000lm	1600lm	PUC2-9301521X-WB
							25°	2000lm	1600lm	PUC2-9302521X-WB
							30°	2000lm	1600lm	PUC2-9303021X-WB
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUC1-9271515X-BB	
						25°	1400lm	1100lm	PUC1-9272515X-BB	
						30°	1400lm	1100lm	PUC1-9273015X-BB	
						3000K 15°	1500lm	1200lm	PUC1-9301515X-BB	
						25°	1500lm	1200lm	PUC1-9302515X-BB	
						30°	1500lm	1200lm	PUC1-9303015X-BB	
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUC2-9271521X-BB	
						25°	1900lm	1500lm	PUC2-9272521X-BB	
						30°	1900lm	1500lm	PUC2-9273021X-BB	
						3000K 15°	2000lm	1600lm	PUC2-9301521X-BB	
						25°	2000lm	1600lm	PUC2-9302521X-BB	
						30°	2000lm	1600lm	PUC2-9303021X-BB	
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUC1-9271515X-WB	
						25°	1400lm	1100lm	PUC1-9272515X-WB	
						30°	1400lm	1100lm	PUC1-9273015X-WB	
						3000K 15°	1500lm	1200lm	PUC1-9301515X-WB	
						25°	1500lm	1200lm	PUC1-9302515X-WB	
						30°	1500lm	1200lm	PUC1-9303015X-WB	
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUC2-9271521X-WB	
						25°	1900lm	1500lm	PUC2-9272521X-WB	
						30°	1900lm	1500lm	PUC2-9273021X-WB	
						3000K 15°	2000lm	1600lm	PUC2-9301521X-WB	
						25°	2000lm	1600lm	PUC2-9302521X-WB	
						30°	2000lm	1600lm	PUC2-9303021X-WB	

Code Remark: X=(ON-OFF) X=P(Phase Dim)

Optional accessory



Code for PUC1-930 1515X-WB with Honeycomb
 PUC1-930 1515X-WB-H

Honeycomb

Ceiling Mounted

