THINK DESIGN

PUBLIC PRICE LIST INDOOR / OUTDOOR COLLECTION

www.nekolighting.com

NEKO
ARCHITECTURAL LIGHTING

ALLGEMEINE INFORMATION

Mit Erscheinen dieser Preisliste verlieren alle vorangegangenen Preislisten zum 1.3.2023 ihre Gültigkeit.
Alle Preise sind unverbindliche Preisempfehlungen und in EURO ohne Mehrwertsteuer angegeben. Die Mehrwertsteuer wird zu dem am Tag der Lieferung gültigen Satz erhoben.

Die angegebenen Werte sind Bemessungswerte. Leistung und Lichtstrom unterliegen einer Toleranz von +/- 10%. Toleranz der Farbtemperatur: +/- 150K. Die Werte gelten, wenn nicht anders angegeben, für eine Umgebungstemperatur von 25°C. NEKO Lighting GmbH behält sich das Recht vor, jederzeit und ohne vorherige Ankündigung Maß-, Konstruktions- und Preisänderungen sowie Änderungen an Bauteilen, die dem technischen Fortschritt dienen, vorzunehmen. Dadurch können sich die in den technischen Produktbeschreibungen angegebenen Parameter ändern. Es erfolgt keine Haftung für Druckfehler.

Es gelten die Allgemeinen Geschäftsbedingungen der NEKO Lighting GmbH in der jeweils gültigen Fassung, die jederzeit bei NEKO Lighting GmbH angefordert werden können und dieser Preisliste beiliegen.
Erfüllungsort und Gerichtsstand ist Ahlen.

GENERAL INFORMATION

With the publication of this price list, all previous price lists as of 1.3.2022 lose their validity.
All prices are recommended retail prices and are given in EURO without VAT. The value added tax is charged at the rate valid on the day of delivery.

The specified values are design values. Output and luminous flux are subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150K. The values are valid for an ambient temperature of 25°C, unless otherwise stated. NEKO Lighting GmbH reserves the right to make dimensional, design and price changes as well as changes to components serving technical progress at any time and without prior notice. This may result in changes to the parameters specified in the technical product descriptions. No liability is accepted for printing errors.

The General Terms and Conditions of Business of NEKO Lighting GmbH in the currently valid version apply; these may be requested from NEKO Lighting GmbH at any time.
Place of performance and jurisdiction is Ahlen.

VERSANDKOSTEN:

Alle Preisangaben verstehen sich zzgl. MwSt. und Frachtkosten ab Lager Hamm.

Kosten für Standardversand innerhalb von Deutschland:

0	–	3,0kg	9,50€
3,1	–	15,0kg	12,50€
15,1	–	30,0kg	15,00€

Ab einem Netto-Auftragswert in Höhe von 1.000€ senden wir frachtfrei.

Sperrgutversand innerhalb von Deutschland:

Alle Leuchten mit einer in dieser Preisliste angegebenen Länge von mehr als 2000mm oder einem Durchmesser größer als 600mm stellen Sperrgut dar und werden immer kostenpflichtig per Spedition versandt.

Lieferungen ins Ausland erfolgen grundsätzlich unfrei.

SHIPPING COSTS:

For all deliveries outside Germany: Supply is made by forward freight from NEKO Lighting GmbH Hamm.

NEKO Code Introduction

[Code_Prefix]-[ELECTRICAL-OPTICAL INFO.]-[COLOR INFO]-[ACCESSORIES]

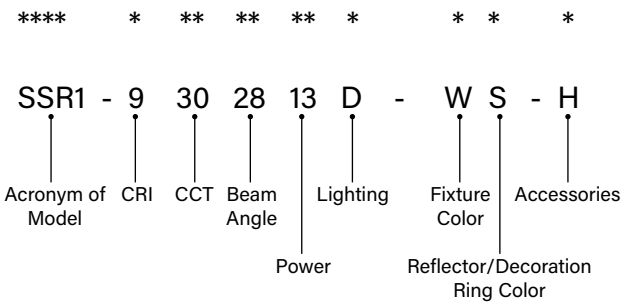

SSR1-9302813D-WS-H

- SENSE100, Round Trim, Adjustable Version
- CRI**9**0, CCT**30**00K, Beam **28**D, **13**W, **D**ALI Control$_{nd}$ **W**hiteTrim, **S**pecular 2 Reflector,
- with **H**oneycomb

INDEX

MINUX Series ! NEW — Page 16 - 18

MINUX 38 | MINUX 44 | MINUX 57

SENSE 45 Series — Page 19 - 20

S45R1 | S45S1

SENSE 68 Series ! NEW — Page 21 - 25

S68R1-G2 | S68S1-G2

SENSE 100 Series ! NEW — Page 26 - 41

S100R1-G2 | S100HR1-G2 | S100S1-G2 | S100HS1-G2 | S100R7-G2 | S100HR7-G2 | S100R2-G2

S100HR2-G2 | S100S2-G2 | S100HS2-G2 | S100R3-G2 | S100HR3-G2 | S100S3-G2 | S100HS3-G2

SENSE 125 Series ! NEW — Page 42 - 50

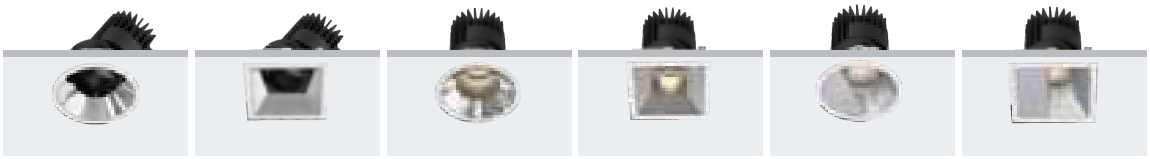

S125R1-G2 | S125S1-G2 | S125R2-G2 | S125S2-G2 | S125R3-G2 | S125S3-G2

SENSE 150 Series ! NEW — Page 51 - 59

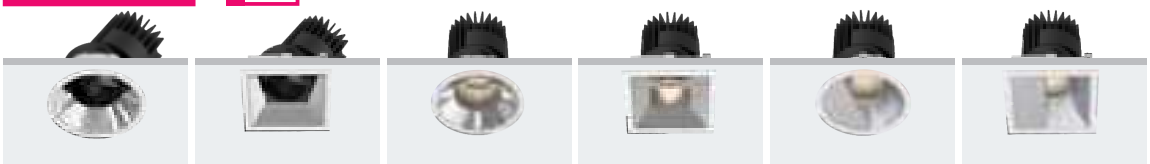

S150R1-G2 | S150S1-G2 | S150R2-G2 | S150S2-G2 | S150R3-G2 | S150S3-G2

VISION Series

! NEW

Page 60 - 61



VISION-VF68



VISION-VW68

TAKEO Pro Series

! NEW

Page 62 - 68

T100 Pro

T150 Pro



T200 Pro

T150C Pro

TS100 Pro



TS150 Pro

TS200 Pro

TAKEO Series

Page 69 - 80



T75

T100

T150



T200

T150C

TS68

TS100



TS150

TS200

NEKO Code Introduction

[Code_Prefix]-[Electrical-optical Info.]-[Color Info]-[Accessories]

**** - * ** ** ** * - * * - *

SSR1 - 9 30 28 13 D - W S - H

- SSR1: Acronym of Model
- 9: CRI
- 30: CCT
- 28: Beam Angle
- 13: Power
- D: Lighting Control
- W: Fixture Color
- S: Reflector / Decoration Ring Color
- H: Accessories

SSR1-9302813D-WS-H
- SENSE100, Round Trim, Adjustable Version,
- CRI90, CCT3000K, Beam 28D, 13W, DALI Control,
- White Trim, Specular 2nd Reflector,
- with Honeycomb.

SLS3-940WW25A-WM
- SENSE150, Square Trim, Wall Washer,
- CRI90, CCT4000K, Wall Washer, 25W, 1-10V Control,
- White Trim, Matt 2nd Reflector.

MR16 Replacement

Page 83 - 86


M3

M4



M4 Pro

CLUB Trim Series for MR16 Replacement

Page 87 - 90


TA5

TA6


TA7

TA8

TRF1

TSA1

TSA1-IP44

TSA2

TSA3

TSA1D

TSA2D

TSA3D

SKYJACK Series

Page 91 - 93

SKYJACK A68

SKYJACK D

SKYJACK F


SKYJACK A145

KENZO Series

Page 94 - 96

K1X30 K1X55 K1X70

FUSION Fixed

Page 97 - 100

FUSION-FF1 FUSION-FF2 FUSION-FF2 FUSION-FX4 FUSION-FF5 FUSION-FF10

FUSION Fixed Trimless

Page 101 - 102

FUSION-FFT5

FUSION-FFT10
■174

FUSION Adjustable

Page 102 - 103

FUSION-FA5

FUSION-FA10

FUSION Wall Washer

Page 104

FUSION-FW5

FUSION-FW10

FUSION General Light

Page 105

FUSION-FG5

FUSION-FG10

FUSION Adjustable Spotlight

Page 106 - 108

FUSION-FS1

FUSION-FS2



FUSION-FS3

FUSION-FS6

FUSION-FF3-FS1

FUSION-FF6-FS2

FUSION Fixed H

! NEW

Page 109 - 111

FUSION-FFE1

FUSION-FFE3

FUSION-FFE5

FUSION-FFE10

FUSION Linear System

Page 112 - 121

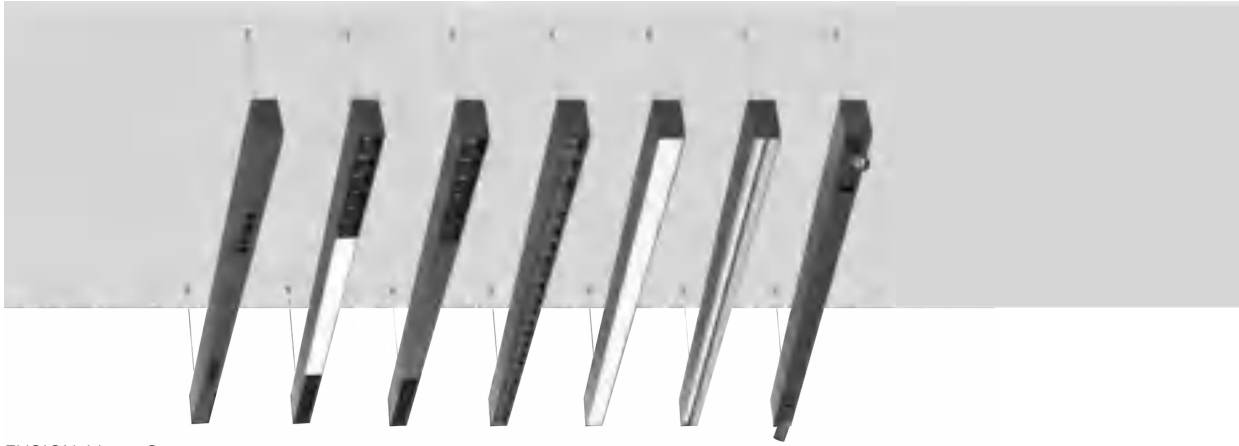

FUSION Linear System

DASH Series / DASH Smart

! NEW

Page 122 - 147

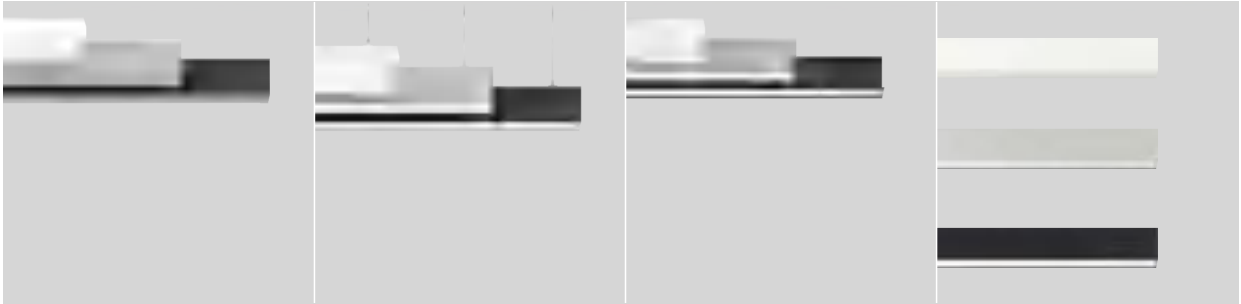

Surface Mounted | Pendant | Trim Recessed | Wall Mounted

MODULINE 26 Linear System

! NEW

Page 148 - 171

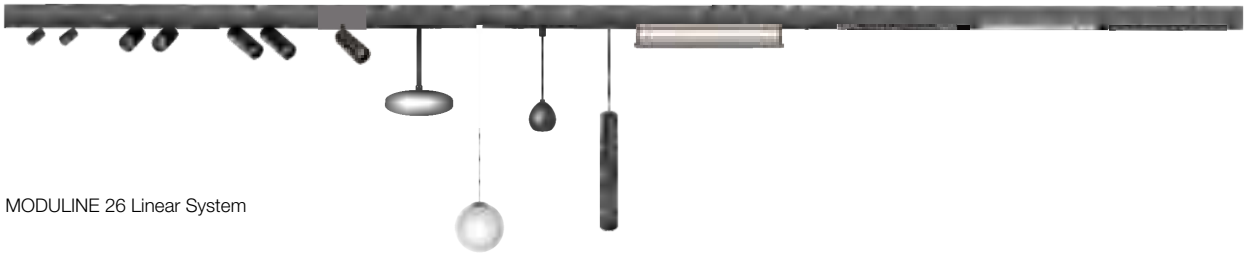

MODULINE 26 Linear System

MINT Ceiling Light Series

! NEW

Page 172

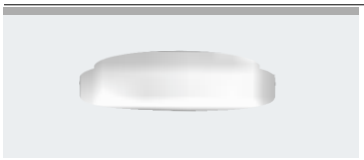

MINT 280

GINGER & PEPPER Series

Page 173 - 174

GINGER 400 | GINGER 600 | PEPPER 400

GAME Ceiling Light Series

Page 175 - 180

GAME

SUGAR Ceiling Light Series

Page 181 - 188

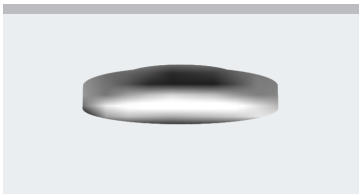

SUGAR

SKY Family Ceiling Light

Page 189 - 192

SKYDRIVER SDRC SKYDRIVER SDSC SKYJOY Single SJSC SKYJOY Double SJDC SKYLINE SL5C

MIU Series

Page 193 - 197

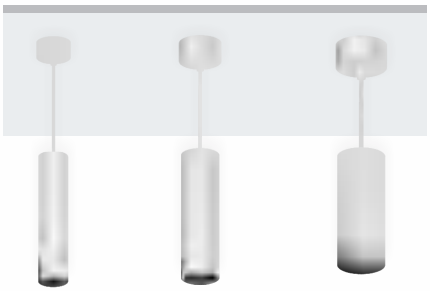

MIU-C M MIU-C L

MIU-P S MIU-P M MIU-P L

KOI Series Wall Light

Page 198



Small KOI Large KOI

BREEZE Series

Page 199 - 200

BREEZE Single

BREEZE Double



BREEZE Triple

VIBES Series

! NEW

Page 201 - 204



V1RC

V2RC



V1SC



V2SC



V1RR

V2RR



V1SR



V2RR

Ceiling Mounted PURE Series

Page 205 - 206



PURE Art-C

PURE S-C

PURE Series Tracklight

Page 207 - 210

PURE ART

PURE S

PURE M

ROXY Series Tracklight

Page 211 - 216

ROXY ART

ROXY S

ROXY K

Zooming
ROXY Art-Z

Zooming
ROXY S-Z

INLINE Series Tracklight

Page 217 - 219

INLINE ST

INLINE SP

VANILLA Neon Flex Series

! NEW

Page 220- 228

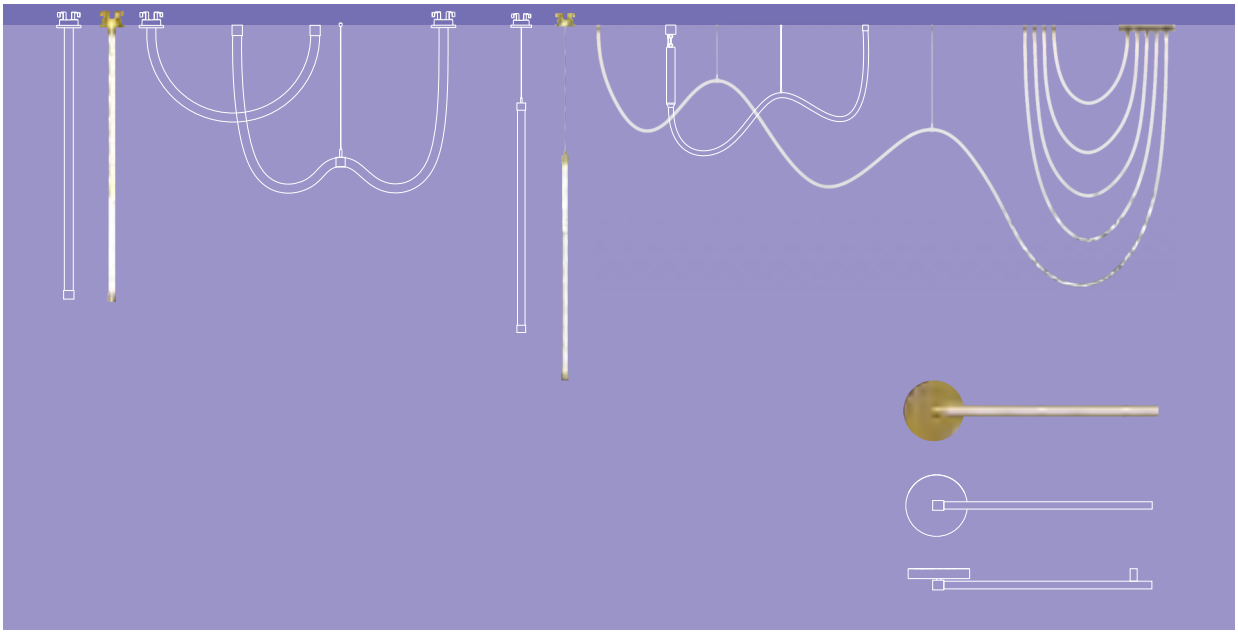

VANILA Neon Flex Series

SEAPOINT Series

Page 230



SEAPOINT

LAKEPOINT Series

! NEW

Page 230

LAKEPOINT Fixed

LAKEPOINT Adjustable

CARMEL Series

Page 231

SKYSURFER SSRC

CARMEL Round

CARMEL Square

CLIFTON Series

Page 231

CLIFTON

RIVA Series

! NEW

Page 232

RIVA Round

RIVA Square

CAMPSBAY Series

Page 232

CAMPSBAY Single

CAMPSBAY Double

LAGOON Series

Page 233

LAGOON

CRUZ D series

! NEW

Page 233

CRUZ D

CAPRI Series

! NEW

Page 233

CAPRI

BAY Series

Page 233

BAY

ASCONA Series

Page 234

ASCONA

NICE Series

! NEW

Page 234

St.Tropez Series

Page 235

St.Tropez

Capetown-Recessed Series

Page 235



Capetown Round-Recessed



Capetown Square-Recessed

Capetown-Surface Series

Page 235



Capetown Round-Surface

Capetown Square-Surface

DURBAN Series

Page 236

DURBAN

POSITANO Series

! NEW

Page 236

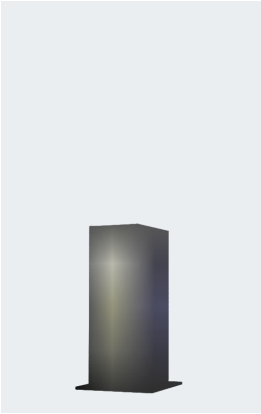

POSITANO 300

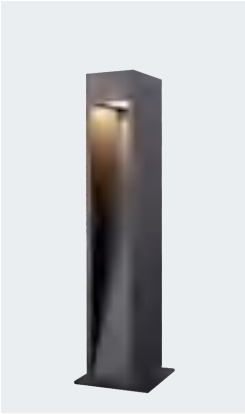

POSITANO 600

PORTOFINO Series

Page 237



PORTOFINO S

PORTOFINO M

PORTOFINO L

PORTOFINO Adjustable

AFTER7 Series

Page 238

AFTER7 Mini

AFTER7 Maxi

TERARACE Series

Page 239 - 240

TERARACE Micro

TERARACE Nano

TERARACE Mini

TERARACE Maxi

NEKO / MINUX 38

Slim & Powerful Fixed Downlight

6W | CRI90 | 2700K 3000K 4000K | 18° 38° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	18°	570lm	420lm	MIF3-9271806N-WM
						38°	570lm	420lm	MIF3-9273806N-WM
						50°	570lm	420lm	MIF3-9275006N-WM
					3000K	18°	600lm	450lm	MIF3-9301806N-WM
						38°	600lm	450lm	MIF3-9303806N-WM
						50°	600lm	450lm	MIF3-9305006N-WM
					4000K	18°	650lm	500lm	MIF3-9401806N-WM
						38°	650lm	500lm	MIF3-9403806N-WM
						50°	650lm	500lm	MIF3-9405006N-WM
6 W	8 W	12 V	500 mA	90	2700K	18°	570lm	420lm	MIF3-9271806N-WB
						38°	570lm	420lm	MIF3-9273806N-WB
						50°	570lm	420lm	MIF3-9275006N-WB
					3000K	18°	600lm	450lm	MIF3-9301806N-WB
						38°	600lm	450lm	MIF3-9303806N-WB
						50°	600lm	450lm	MIF3-9305006N-WB
					4000K	18°	650lm	500lm	MIF3-9401806N-WB
						38°	650lm	500lm	MIF3-9403806N-WB
						50°	650lm	500lm	MIF3-9405006N-WB
6 W	8 W	12 V	500 mA	90	2700K	18°	570lm	420lm	MIF3-9271806N-WC
						38°	570lm	420lm	MIF3-9273806N-WC
						50°	570lm	420lm	MIF3-9275006N-WC
					3000K	18°	600lm	450lm	MIF3-9301806N-WC
						38°	600lm	450lm	MIF3-9303806N-WC
						50°	600lm	450lm	MIF3-9305006N-WC
					4000K	18°	650lm	500lm	MIF3-9401806N-WC
						38°	650lm	500lm	MIF3-9403806N-WC
						50°	650lm	500lm	MIF3-9405006N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

6 W	8 W	12 V	500 mA	90	2700K	18°	570lm	420lm	MIF3-9271806N-WW
						38°	570lm	420lm	MIF3-9273806N-WW
						50°	570lm	420lm	MIF3-9275006N-WW
					3000K	18°	600lm	450lm	MIF3-9301806N-WW
						38°	600lm	450lm	MIF3-9303806N-WW
						50°	600lm	450lm	MIF3-9305006N-WW
					4000K	18°	650lm	500lm	MIF3-9401806N-WW
						38°	650lm	500lm	MIF3-9403806N-WW
						50°	650lm	500lm	MIF3-9405006N-WW
6 W	8 W	12 V	500 mA	90	2700K	18°	570lm	420lm	MIF3-9271806N-WG
						38°	570lm	420lm	MIF3-9273806N-WG
						50°	570lm	420lm	MIF3-9275006N-WG
					3000K	18°	600lm	450lm	MIF3-9301806N-WG
						38°	600lm	450lm	MIF3-9303806N-WG
						50°	600lm	450lm	MIF3-9305006N-WG
					4000K	18°	650lm	500lm	MIF3-9401806N-WG
						38°	650lm	500lm	MIF3-9403806N-WG
						50°	650lm	500lm	MIF3-9405006N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	69,00 €
ON-OFF	79,00 €
Phase Dim	99,00 €
DALI Dim	109,00 €

Trimless Version available



Trimless code for MIF3-9405006N-WM → MIT3-9405006N-WM

Trimless: +10,00€



NEKO / MINUX 44

Slim & Powerful Fixed Downlight

9W | CRI90 | 2700K 3000K 4000K | 20° 40° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	20°	900lm	750lm	MIF4-9272009N-WM
						40°	900lm	750lm	MIF4-9274009N-WM
						50°	900lm	750lm	MIF4-9275009N-WM
					3000K	20°	950lm	800lm	MIF4-9302009N-WM
						40°	950lm	800lm	MIF4-9304009N-WM
						50°	950lm	800lm	MIF4-9305009N-WM
					4000K	20°	1050lm	900lm	MIF4-9402009N-WM
						40°	1050lm	900lm	MIF4-9404009N-WM
						50°	1050lm	900lm	MIF4-9405009N-WM

9 W	11 W	36 V	250 mA	90	2700K	20°	900lm	750lm	MIF4-9272009N-WB
						40°	900lm	750lm	MIF4-9274009N-WB
						50°	900lm	750lm	MIF4-9275009N-WB
					3000K	20°	950lm	800lm	MIF4-9302009N-WB
						40°	950lm	800lm	MIF4-9304009N-WB
						50°	950lm	800lm	MIF4-9305009N-WB
					4000K	20°	1050lm	900lm	MIF4-9402009N-WB
						40°	1050lm	900lm	MIF4-9404009N-WB
						50°	1050lm	900lm	MIF4-9405009N-WB

9 W	11 W	36 V	250 mA	90	2700K	20°	900lm	750lm	MIF4-9272009N-WC
						40°	900lm	750lm	MIF4-9274009N-WC
						50°	900lm	750lm	MIF4-9275009N-WC
					3000K	20°	950lm	800lm	MIF4-9302009N-WC
						40°	950lm	800lm	MIF4-9304009N-WC
						50°	950lm	800lm	MIF4-9305009N-WC
					4000K	20°	1050lm	900lm	MIF4-9402009N-WC
						40°	1050lm	900lm	MIF4-9404009N-WC
						50°	1050lm	900lm	MIF4-9405009N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

9 W	11 W	36 V	250 mA	90	2700K	20°	900lm	750lm	MIF4-9272009N-WW
						40°	900lm	750lm	MIF4-9274009N-WW
						50°	900lm	750lm	MIF4-9275009N-WW
					3000K	20°	950lm	800lm	MIF4-9302009N-WW
						40°	950lm	800lm	MIF4-9304009N-WW
						50°	950lm	800lm	MIF4-9305009N-WW
					4000K	20°	1050lm	900lm	MIF4-9402009N-WW
						40°	1050lm	900lm	MIF4-9404009N-WW
						50°	1050lm	900lm	MIF4-9405009N-WW

9 W	11 W	36 V	250 mA	90	2700K	20°	900lm	750lm	MIF4-9272009N-WG
						40°	900lm	750lm	MIF4-9274009N-WG
						50°	900lm	750lm	MIF4-9275009N-WG
					3000K	20°	950lm	800lm	MIF4-9302009N-WG
						40°	950lm	800lm	MIF4-9304009N-WG
						50°	950lm	800lm	MIF4-9305009N-WG
					4000K	20°	1050lm	900lm	MIF4-9402009N-WG
						40°	1050lm	900lm	MIF4-9404009N-WG
						50°	1050lm	900lm	MIF4-9405009N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	79,00 €
ON-OFF	89,00 €
Phase Dim	119,00 €
DALI Dim	149,00 €

Trimless Version available

Trimless code for MIF4-9405009N-WM → MIT4-9405009N-WM

Trimless: +10,00€



NEKO / MINUX 57

Slim & Powerful Fixed Downlight

13W | CRI90 | 2700K 3000K 4000K | 18° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

57 | 5-25mm Ceiling Thickness



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	1000lm	MIF5-9271813N-WM
						36°	1200lm	1000lm	MIF5-9273613N-WM
						50°	1200lm	1000lm	MIF5-9275013N-WM
					3000K	18°	1300lm	1050lm	MIF5-9301813N-WM
						36°	1300lm	1050lm	MIF5-9303613N-WM
						50°	1300lm	1050lm	MIF5-9305013N-WM
					4000K	18°	1400lm	1150lm	MIF5-9401813N-WM
						36°	1400lm	1150lm	MIF5-9403613N-WM
						50°	1400lm	1150lm	MIF5-9405013N-WM
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	1000lm	MIF5-9271813N-WB
						36°	1200lm	1000lm	MIF5-9273613N-WB
						50°	1200lm	1000lm	MIF5-9275013N-WB
					3000K	18°	1300lm	1050lm	MIF5-9301813N-WB
						36°	1300lm	1050lm	MIF5-9303613N-WB
						50°	1300lm	1050lm	MIF5-9305013N-WB
					4000K	18°	1400lm	1150lm	MIF5-9401813N-WB
						36°	1400lm	1150lm	MIF5-9403613N-WB
						50°	1400lm	1150lm	MIF5-9405013N-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	1000lm	MIF5-9271813N-WC
						36°	1200lm	1000lm	MIF5-9273613N-WC
						50°	1200lm	1000lm	MIF5-9275013N-WC
					3000K	18°	1300lm	1050lm	MIF5-9301813N-WC
						36°	1300lm	1050lm	MIF5-9303613N-WC
						50°	1300lm	1050lm	MIF5-9305013N-WC
					4000K	18°	1400lm	1150lm	MIF5-9401813N-WC
						36°	1400lm	1150lm	MIF5-9403613N-WC
						50°	1400lm	1150lm	MIF5-9405013N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1200lm	1000lm	MIF5-9271813N-WW
						40°	1200lm	1000lm	MIF5-9273613N-WW
						50°	1200lm	1000lm	MIF5-9275013N-WW
					3000K	20°	1300lm	1050lm	MIF5-9301813N-WW
						40°	1300lm	1050lm	MIF5-9303613N-WW
						50°	1300lm	1050lm	MIF5-9305013N-WW
					4000K	20°	1400lm	1150lm	MIF5-9401813N-WW
						40°	1400lm	1150lm	MIF5-9403613N-WW
						50°	1400lm	1150lm	MIF5-9405013N-WW
13 W	15 W	36 V	350 mA	90	2700K	20°	1200lm	1000lm	MIF5-9271813N-WG
						40°	1200lm	1000lm	MIF5-9273613N-WG
						50°	1200lm	1000lm	MIF5-9275013N-WG
					3000K	20°	1300lm	1050lm	MIF5-9301813N-WG
						40°	1300lm	1050lm	MIF5-9303613N-WG
						50°	1300lm	1050lm	MIF5-9305013N-WG
					4000K	20°	1400lm	1150lm	MIF5-9401813N-WG
						40°	1400lm	1150lm	MIF5-9403613N-WG
						50°	1400lm	1150lm	MIF5-9405013N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	89,00 €
ON-OFF	109,00 €
Phase Dim	129,00 €
DALI Dim	139,00 €

Trimless Version available

Trimless code for MIF5-9405013N-WM → MIT5-9405013N-WM

9.5-15mm Ceiling Thickness | 68



Trimless: +10,00€

NEKO / SENSE 45 / S45R1
Adjustable LED Downlight

4W | CRI90 | 2700K 3000K 4000K | 18° 24° 35° 50° | CREE 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | Intertek

45° | 1-20mm Ceiling Thickness



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WM
						24°	480lm	330lm	SUR1-9272404N-WM
						35°	480lm	330lm	SUR1-9273504N-WM
						50°	480lm	330lm	SUR1-9275004N-WM
					3000K	18°	500lm	350lm	SUR1-9301804N-WM
						24°	500lm	350lm	SUR1-9302404N-WM
						35°	500lm	350lm	SUR1-9303504N-WM
						50°	500lm	350lm	SUR1-9305004N-WM
					4000K	18°	550lm	380lm	SUR1-9401804N-WM
						24°	550lm	380lm	SUR1-9402404N-WM
						35°	550lm	380lm	SUR1-9403504N-WM
						50°	550lm	380lm	SUR1-9405004N-WM

White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WW
						24°	480lm	330lm	SUR1-9272404N-WW
						35°	480lm	330lm	SUR1-9273504N-WW
						50°	480lm	330lm	SUR1-9275004N-WW
					3000K	18°	500lm	350lm	SUR1-9301804N-WW
						24°	500lm	350lm	SUR1-9302404N-WW
						35°	500lm	350lm	SUR1-9303504N-WW
						50°	500lm	350lm	SUR1-9305004N-WW
					4000K	18°	550lm	380lm	SUR1-9401804N-WW
						24°	550lm	380lm	SUR1-9402404N-WW
						35°	550lm	380lm	SUR1-9403504N-WW
						50°	550lm	380lm	SUR1-9405004N-WW

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WB
						24°	480lm	330lm	SUR1-9272404N-WB
						35°	480lm	330lm	SUR1-9273504N-WB
						50°	480lm	330lm	SUR1-9275004N-WB
					3000K	18°	500lm	350lm	SUR1-9301804N-WB
						24°	500lm	350lm	SUR1-9302404N-WB
						35°	500lm	350lm	SUR1-9303504N-WB
						50°	500lm	350lm	SUR1-9305004N-WB
					4000K	18°	550lm	380lm	SUR1-9401804N-WB
						24°	550lm	380lm	SUR1-9402404N-WB
						35°	550lm	380lm	SUR1-9403504N-WB
						50°	550lm	380lm	SUR1-9405004N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	79,00 €
ON-OFF	89,00 €
Phase Dim	109,00 €
DALI Dim	129,00 €

Optional accessary

Honeycomb

Code for SUR1-9302404N-WM with Honeycomb
SUR1-9302404N-WM-H

Honeycomb: +9,00€

NEKO / SENSE 45 / S45S1

Adjustable LED Downlight

4W | CRI90 | 2700K 3000K 4000K | 18° 24° 35° 50° | CREE 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | Intertek



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WM
						24°	480lm	330lm	SUS1-9272404N-WM
						35°	480lm	330lm	SUS1-9273504N-WM
						50°	480lm	330lm	SUS1-9275004N-WM
					3000K	18°	500lm	350lm	SUS1-9301804N-WM
						24°	500lm	350lm	SUS1-9302404N-WM
						35°	500lm	350lm	SUS1-9303504N-WM
						50°	500lm	350lm	SUS1-9305004N-WM
					4000K	18°	550lm	380lm	SUS1-9401804N-WM
						24°	550lm	380lm	SUS1-9402404N-WM
						35°	550lm	380lm	SUS1-9403504N-WM
						50°	550lm	380lm	SUS1-9405004N-WM

White Reflector

4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WW
						24°	480lm	330lm	SUS1-9272404N-WW
						35°	480lm	330lm	SUS1-9273504N-WW
						50°	480lm	330lm	SUS1-9275004N-WW
					3000K	18°	500lm	350lm	SUS1-9301804N-WW
						24°	500lm	350lm	SUS1-9302404N-WW
						35°	500lm	350lm	SUS1-9303504N-WW
						50°	500lm	350lm	SUS1-9305004N-WW
					4000K	18°	550lm	380lm	SUS1-9401804N-WW
						24°	550lm	380lm	SUS1-9402404N-WW
						35°	550lm	380lm	SUS1-9403504N-WW
						50°	550lm	380lm	SUS1-9405004N-WW

Black Reflector

4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WB
						24°	480lm	330lm	SUS1-9272404N-WB
						35°	480lm	330lm	SUS1-9273504N-WB
						50°	480lm	330lm	SUS1-9275004N-WB
					3000K	18°	500lm	350lm	SUS1-9301804N-WB
						24°	500lm	350lm	SUS1-9302404N-WB
						35°	500lm	350lm	SUS1-9303504N-WB
						50°	500lm	350lm	SUS1-9305004N-WB
					4000K	18°	550lm	380lm	SUS1-9401804N-WB
						24°	550lm	380lm	SUS1-9402404N-WB
						35°	550lm	380lm	SUS1-9403504N-WB
						50°	550lm	380lm	SUS1-9405004N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	79,00 €
ON-OFF	89,00 €
Phase Dim	109,00 €
DALI Dim	129,00 €

Optional accessary

Honeycomb

Code for SUS1-9302404N-WM with Honeycomb
SUS1-9302404N-WM-H

Honeycomb: +9,00€

NEKO / SENSE 68 / S68R1-G2

Adjustable LED Downlight

7.5W 11W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE | Intertek

68 | 70 Metal Ceiling | 5-20mm Ceiling Thickness



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WS
						30°	850lm	620lm	STR1G2-9273008N-WS
						40°	850lm	620lm	STR1G2-9274008N-WS
						55°	850lm	620lm	STR1G2-9275508N-WS
					3000K	18°	900lm	650lm	STR1G2-9301808N-WS
						30°	900lm	650lm	STR1G2-9303008N-WS
						40°	900lm	650lm	STR1G2-9304008N-WS
						55°	900lm	650lm	STR1G2-9305508N-WS
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WS
						30°	1000lm	700lm	STR1G2-9403008N-WS
						40°	1000lm	700lm	STR1G2-9404008N-WS
						55°	1000lm	700lm	STR1G2-9405508N-WS
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WS
						30°	1100lm	770lm	STR1G2-9273011N-WS
						40°	1100lm	770lm	STR1G2-9274011N-WS
						55°	1100lm	770lm	STR1G2-9275511N-WS
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WS
						30°	1200lm	800lm	STR1G2-9303011N-WS
						40°	1200lm	800lm	STR1G2-9304011N-WS
						55°	1200lm	800lm	STR1G2-9305511N-WS
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WS
						30°	1300lm	850lm	STR1G2-9403011N-WS
						40°	1300lm	850lm	STR1G2-9404011N-WS
						55°	1300lm	850lm	STR1G2-9405511N-WS

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WM
						30°	850lm	620lm	STR1G2-9273008N-WM
						40°	850lm	620lm	STR1G2-9274008N-WM
						55°	850lm	620lm	STR1G2-9275508N-WM
					3000K	18°	900lm	650lm	STR1G2-9301808N-WM
						30°	900lm	650lm	STR1G2-9303008N-WM
						40°	900lm	650lm	STR1G2-9304008N-WM
						55°	900lm	650lm	STR1G2-9305508N-WM
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WM
						30°	1000lm	700lm	STR1G2-9403008N-WM
						40°	1000lm	700lm	STR1G2-9404008N-WM
						55°	1000lm	700lm	STR1G2-9405508N-WM
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WM
						30°	1100lm	770lm	STR1G2-9273011N-WM
						40°	1100lm	770lm	STR1G2-9274011N-WM
						55°	1100lm	770lm	STR1G2-9275511N-WM
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WM
						30°	1200lm	800lm	STR1G2-9303011N-WM
						40°	1200lm	800lm	STR1G2-9304011N-WM
						55°	1200lm	800lm	STR1G2-9305511N-WM
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WM
						30°	1300lm	850lm	STR1G2-9403011N-WM
						40°	1300lm	850lm	STR1G2-9404011N-WM
						55°	1300lm	850lm	STR1G2-9405511N-WM

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WB
						30°	850lm	620lm	STR1G2-9273008N-WB
						40°	850lm	620lm	STR1G2-9274008N-WB
						55°	850lm	620lm	STR1G2-9275508N-WB
					3000K	18°	900lm	650lm	STR1G2-9301808N-WB
						30°	900lm	650lm	STR1G2-9303008N-WB
						40°	900lm	650lm	STR1G2-9304008N-WB
						55°	900lm	650lm	STR1G2-9305508N-WB
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WB
						30°	1000lm	700lm	STR1G2-9403008N-WB
						40°	1000lm	700lm	STR1G2-9404008N-WB
						55°	1000lm	700lm	STR1G2-9405508N-WB
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WB
						30°	1100lm	770lm	STR1G2-9273011N-WB
						40°	1100lm	770lm	STR1G2-9274011N-WB
						55°	1100lm	770lm	STR1G2-9275511N-WB
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WB
						30°	1200lm	800lm	STR1G2-9303011N-WB
						40°	1200lm	800lm	STR1G2-9304011N-WB
						55°	1200lm	800lm	STR1G2-9305511N-WB
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WB
						30°	1300lm	850lm	STR1G2-9403011N-WB
						40°	1300lm	850lm	STR1G2-9404011N-WB
						55°	1300lm	850lm	STR1G2-9405511N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI Dim	139,00 €

Dim-to-Warm	
ohne / none	129,00 €
Phase Dim	149,00 €
DALI Dim	169,00 €

7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WC
						30°	850lm	620lm	STR1G2-9273008N-WC
						40°	850lm	620lm	STR1G2-9274008N-WC
						55°	850lm	620lm	STR1G2-9275508N-WC
					3000K	18°	900lm	650lm	STR1G2-9301808N-WC
						30°	900lm	650lm	STR1G2-9303008N-WC
						40°	900lm	650lm	STR1G2-9304008N-WC
						55°	900lm	650lm	STR1G2-9305508N-WC
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WC
						30°	1000lm	700lm	STR1G2-9403008N-WC
						40°	1000lm	700lm	STR1G2-9404008N-WC
						55°	1000lm	700lm	STR1G2-9405508N-WC
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WC
						30°	1100lm	770lm	STR1G2-9273011N-WC
						40°	1100lm	770lm	STR1G2-9274011N-WC
						55°	1100lm	770lm	STR1G2-9275511N-WC
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WC
						30°	1200lm	800lm	STR1G2-9303011N-WC
						40°	1200lm	800lm	STR1G2-9304011N-WC
						55°	1200lm	800lm	STR1G2-9305511N-WC
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WC
						30°	1300lm	850lm	STR1G2-9403011N-WC
						40°	1300lm	850lm	STR1G2-9404011N-WC
						55°	1300lm	850lm	STR1G2-9405511N-WC

7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WW
						30°	850lm	620lm	STR1G2-9273008N-WW
						40°	850lm	620lm	STR1G2-9274008N-WW
						55°	850lm	620lm	STR1G2-9275508N-WW
					3000K	18°	900lm	650lm	STR1G2-9301808N-WW
						30°	900lm	650lm	STR1G2-9303008N-WW
						40°	900lm	650lm	STR1G2-9304008N-WW
						55°	900lm	650lm	STR1G2-9305508N-WW
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WW
						30°	1000lm	700lm	STR1G2-9403008N-WW
						40°	1000lm	700lm	STR1G2-9404008N-WW
						55°	1000lm	700lm	STR1G2-9405508N-WW
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WW
						30°	1100lm	770lm	STR1G2-9273011N-WW
						40°	1100lm	770lm	STR1G2-9274011N-WW
						55°	1100lm	770lm	STR1G2-9275511N-WW
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WW
						30°	1200lm	800lm	STR1G2-9303011N-WW
						40°	1200lm	800lm	STR1G2-9304011N-WW
						55°	1200lm	800lm	STR1G2-9305511N-WW
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WW
						30°	1300lm	850lm	STR1G2-9403011N-WW
						40°	1300lm	850lm	STR1G2-9404011N-WW
						55°	1300lm	850lm	STR1G2-9405511N-WW

7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WG
						30°	850lm	620lm	STR1G2-9273008N-WG
						40°	850lm	620lm	STR1G2-9274008N-WG
						55°	850lm	620lm	STR1G2-9275508N-WG
					3000K	18°	900lm	650lm	STR1G2-9301808N-WG
						30°	900lm	650lm	STR1G2-9303008N-WG
						40°	900lm	650lm	STR1G2-9304008N-WG
						55°	900lm	650lm	STR1G2-9305508N-WG
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WG
						30°	1000lm	700lm	STR1G2-9403008N-WG
						40°	1000lm	700lm	STR1G2-9404008N-WG
						55°	1000lm	700lm	STR1G2-9405508N-WG
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WG
						30°	1100lm	770lm	STR1G2-9273011N-WG
						40°	1100lm	770lm	STR1G2-9274011N-WG
						55°	1100lm	770lm	STR1G2-9275511N-WG
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WG
						30°	1200lm	800lm	STR1G2-9303011N-WG
						40°	1200lm	800lm	STR1G2-9304011N-WG
						55°	1200lm	800lm	STR1G2-9305511N-WG
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WG
						30°	1300lm	850lm	STR1G2-9403011N-WG
						40°	1300lm	850lm	STR1G2-9404011N-WG
						55°	1300lm	850lm	STR1G2-9405511N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary

Honeycomb

Code for STR1G2-9304008N-WM with Honeycomb STR1G2-9304008N-WM-H

Honeycomb: +9,00€

ohne / none	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI Dim	139,00 €

Dim-to-Warm	
ohne / none	129,00 €
Phase Dim	149,00 €
DALI Dim	169,00 €

Trimless Version available

Trimless code for STR1G2-9304008N-WM → STR3G2-9304008N-WM

Trimless: +10,00€



NEKO / SENSE 68 / S68S1-G2

Adjustable LED Downlight

7.5W 11W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WS
						30°	850lm	620lm	STS1G2-9273008N-WS
						40°	850lm	620lm	STS1G2-9274008N-WS
						55°	850lm	620lm	STS1G2-9275508N-WS
					3000K	18°	900lm	650lm	STS1G2-9301808N-WS
						30°	900lm	650lm	STS1G2-9303008N-WS
						40°	900lm	650lm	STS1G2-9304008N-WS
						55°	900lm	650lm	STS1G2-9305508N-WS
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WS
						30°	1000lm	700lm	STS1G2-9403008N-WS
						40°	1000lm	700lm	STS1G2-9404008N-WS
						55°	1000lm	700lm	STS1G2-9405508N-WS
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WS
						30°	1100lm	770lm	STS1G2-9273011N-WS
						40°	1100lm	770lm	STS1G2-9274011N-WS
						55°	1100lm	770lm	STS1G2-9275511N-WS
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WS
						30°	1200lm	800lm	STS1G2-9303011N-WS
						40°	1200lm	800lm	STS1G2-9304011N-WS
						55°	1200lm	800lm	STS1G2-9305511N-WS
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WS
						30°	1300lm	850lm	STS1G2-9403011N-WS
						40°	1300lm	850lm	STS1G2-9404011N-WS
						55°	1300lm	850lm	STS1G2-9405511N-WS
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WM
						30°	850lm	620lm	STS1G2-9273008N-WM
						40°	850lm	620lm	STS1G2-9274008N-WM
						55°	850lm	620lm	STS1G2-9275508N-WM
					3000K	18°	900lm	650lm	STS1G2-9301808N-WM
						30°	900lm	650lm	STS1G2-9303008N-WM
						40°	900lm	650lm	STS1G2-9304008N-WM
						55°	900lm	650lm	STS1G2-9305508N-WM
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WM
						30°	1000lm	700lm	STS1G2-9403008N-WM
						40°	1000lm	700lm	STS1G2-9404008N-WM
						55°	1000lm	700lm	STS1G2-9405508N-WM
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WM
						30°	1100lm	770lm	STS1G2-9273011N-WM
						40°	1100lm	770lm	STS1G2-9274011N-WM
						55°	1100lm	770lm	STS1G2-9275511N-WM
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WM
						30°	1200lm	800lm	STS1G2-9303011N-WM
						40°	1200lm	800lm	STS1G2-9304011N-WM
						55°	1200lm	800lm	STS1G2-9305511N-WM
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WM
						30°	1300lm	850lm	STS1G2-9403011N-WM
						40°	1300lm	850lm	STS1G2-9404011N-WM
						55°	1300lm	850lm	STS1G2-9405511N-WM
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WB
						30°	850lm	620lm	STS1G2-9273008N-WB
						40°	850lm	620lm	STS1G2-9274008N-WB
						55°	850lm	620lm	STS1G2-9275508N-WB
					3000K	18°	900lm	650lm	STS1G2-9301808N-WB
						30°	900lm	650lm	STS1G2-9303008N-WB
						40°	900lm	650lm	STS1G2-9304008N-WB
						55°	900lm	650lm	STS1G2-9305508N-WB
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WB
						30°	1000lm	700lm	STS1G2-9403008N-WB
						40°	1000lm	700lm	STS1G2-9404008N-WB
						55°	1000lm	700lm	STS1G2-9405508N-WB
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WB
						30°	1100lm	770lm	STS1G2-9273011N-WB
						40°	1100lm	770lm	STS1G2-9274011N-WB
						55°	1100lm	770lm	STS1G2-9275511N-WB
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WB
						30°	1200lm	800lm	STS1G2-9303011N-WB
						40°	1200lm	800lm	STS1G2-9304011N-WB
						55°	1200lm	800lm	STS1G2-9305511N-WB
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WB
						30°	1300lm	850lm	STS1G2-9403011N-WB
						40°	1300lm	850lm	STS1G2-9404011N-WB
						55°	1300lm	850lm	STS1G2-9405511N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI Dim	139,00 €

Dim-to-Warm	
ohne / none	129,00 €
Phase Dim	149,00 €
DALI Dim	169,00 €

7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WC
						30°	850lm	620lm	STS1G2-9273008N-WC
						40°	850lm	620lm	STS1G2-9274008N-WC
						55°	850lm	620lm	STS1G2-9275508N-WC
					3000K	18°	900lm	650lm	STS1G2-9301808N-WC
						30°	900lm	650lm	STS1G2-9303008N-WC
						40°	900lm	650lm	STS1G2-9304008N-WC
						55°	900lm	650lm	STS1G2-9305508N-WC
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WC
						30°	1000lm	700lm	STS1G2-9403008N-WC
						40°	1000lm	700lm	STS1G2-9404008N-WC
						55°	1000lm	700lm	STS1G2-9405508N-WC
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WC
						30°	1100lm	770lm	STS1G2-9273011N-WC
						40°	1100lm	770lm	STS1G2-9274011N-WC
						55°	1100lm	770lm	STS1G2-9275511N-WC
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WC
						30°	1200lm	800lm	STS1G2-9303011N-WC
						40°	1200lm	800lm	STS1G2-9304011N-WC
						55°	1200lm	800lm	STS1G2-9305511N-WC
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WC
						30°	1300lm	850lm	STS1G2-9403011N-WC
						40°	1300lm	850lm	STS1G2-9404011N-WC
						55°	1300lm	850lm	STS1G2-9405511N-WC

7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WW
						30°	850lm	620lm	STS1G2-9273008N-WW
						40°	850lm	620lm	STS1G2-9274008N-WW
						55°	850lm	620lm	STS1G2-9275508N-WW
					3000K	18°	900lm	650lm	STS1G2-9301808N-WW
						30°	900lm	650lm	STS1G2-9303008N-WW
						40°	900lm	650lm	STS1G2-9304008N-WW
						55°	900lm	650lm	STS1G2-9305508N-WW
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WW
						30°	1000lm	700lm	STS1G2-9403008N-WW
						40°	1000lm	700lm	STS1G2-9404008N-WW
						55°	1000lm	700lm	STS1G2-9405508N-WW
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WW
						30°	1100lm	770lm	STS1G2-9273011N-WW
						40°	1100lm	770lm	STS1G2-9274011N-WW
						55°	1100lm	770lm	STS1G2-9275511N-WW
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WW
						30°	1200lm	800lm	STS1G2-9303011N-WW
						40°	1200lm	800lm	STS1G2-9304011N-WW
						55°	1200lm	800lm	STS1G2-9305511N-WW
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WW
						30°	1300lm	850lm	STS1G2-9403011N-WW
						40°	1300lm	850lm	STS1G2-9404011N-WW
						55°	1300lm	850lm	STS1G2-9405511N-WW

7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WG
						30°	850lm	620lm	STS1G2-9273008N-WG
						40°	850lm	620lm	STS1G2-9274008N-WG
						55°	850lm	620lm	STS1G2-9275508N-WG
					3000K	18°	900lm	650lm	STS1G2-9301808N-WG
						30°	900lm	650lm	STS1G2-9303008N-WG
						40°	900lm	650lm	STS1G2-9304008N-WG
						55°	900lm	650lm	STS1G2-9305508N-WG
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WG
						30°	1000lm	700lm	STS1G2-9403008N-WG
						40°	1000lm	700lm	STS1G2-9404008N-WG
						55°	1000lm	700lm	STS1G2-9405508N-WG
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WG
						30°	1100lm	770lm	STS1G2-9273011N-WG
						40°	1100lm	770lm	STS1G2-9274011N-WG
						55°	1100lm	770lm	STS1G2-9275511N-WG
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WG
						30°	1200lm	800lm	STS1G2-9303011N-WG
						40°	1200lm	800lm	STS1G2-9304011N-WG
						55°	1200lm	800lm	STS1G2-9305511N-WG
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WG
						30°	1300lm	850lm	STS1G2-9403011N-WG
						40°	1300lm	850lm	STS1G2-9404011N-WG
						55°	1300lm	850lm	STS1G2-9405511N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary

Honeycomb

Code for STS1G2-9304008N-WM with **H**oneycomb
STS1G2-9304008N-WM-**H**

Honeycomb: +9,00€

ohne / none	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI Dim	139,00 €

Dim-to-Warm	
ohne / none	129,00 €
Phase Dim	149,00 €
DALI Dim	169,00 €

Trimless Version available

Trimless code for STS1G2-9304008N-WM → STS**3**G2-9304008N-WM

Trimless: +10,00€



NEKO / SENSE 68 / S68-G2 - 8.5W-12°
Adjustable LED Downlight

6W | CRI90 | 2700K 3000K 4000K | 12° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

68 | 70 Metal Ceiling | 5-20mm Ceiling Thickness



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W		8 W	12 V	500 mA	90	2700K	12°	670lm	330lm	STR1G2-9271206N-WS
						3000K	12°	700lm	350lm	STR1G2-9301206N-WS
						4000K	12°	750lm	390lm	STR1G2-9401206N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI Dim	159,00 €

Trimless Version available

Trimless code for STR1G2-9304008N-WM → STR3G2-9304008N-WM

Trimless: +10,00€

73



6W | CRI90 | 2700K 3000K 4000K | 12° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

68x68 | 1-25mm Ceiling Thickness



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W		8 W	12 V	500 mA	90	2700K	12°	670lm	330lm	STS1G2-9271206N-WS
						3000K	12°	700lm	350lm	STS1G2-9301206N-WS
						4000K	12°	750lm	390lm	STS1G2-9401206N-WS

ohne / none	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI Dim	159,00 €

Trimless Version available

Trimless code for STS1G2-9304008N-WM → STS3G2-9304008N-WM

Trimless: +10,00€

70X70



NEKO / SENSE 100 / S100R1-G2

Adjustable LED Downlight

13W 18W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE | Intertek

100 | 1-25mm Ceiling Thickness



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WS
						30°	1400lm	1150lm	SSR1G2-9273013N-WS
						40°	1400lm	1150lm	SSR1G2-9274013N-WS
						45°	1400lm	1050lm	SSR1G2-9274513N-WS
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WS
						30°	1500lm	1250lm	SSR1G2-9303013N-WS
						40°	1500lm	1250lm	SSR1G2-9304013N-WS
						45°	1500lm	1150lm	SSR1G2-9304513N-WS
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WS
						30°	1600lm	1350lm	SSR1G2-9403013N-WS
						40°	1600lm	1350lm	SSR1G2-9404013N-WS
						45°	1600lm	1250lm	SSR1G2-9404513N-WS
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WS
						30°	1900lm	1700lm	SSR1G2-9273018N-WS
						40°	1900lm	1700lm	SSR1G2-9274018N-WS
						45°	1900lm	1500lm	SSR1G2-9274518N-WS
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WS
						30°	2000lm	1800lm	SSR1G2-9303018N-WS
						40°	2000lm	1800lm	SSR1G2-9304018N-WS
						45°	2000lm	1600lm	SSR1G2-9304518N-WS
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WS
						30°	2200lm	1900lm	SSR1G2-9403018N-WS
						40°	2200lm	1900lm	SSR1G2-9404018N-WS
						45°	2200lm	1700lm	SSR1G2-9404518N-WS

Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WM
						30°	1400lm	1150lm	SSR1G2-9273013N-WM
						40°	1400lm	1150lm	SSR1G2-9274013N-WM
						45°	1400lm	1050lm	SSR1G2-9274513N-WM
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WM
						30°	1500lm	1250lm	SSR1G2-9303013N-WM
						40°	1500lm	1250lm	SSR1G2-9304013N-WM
						45°	1500lm	1150lm	SSR1G2-9304513N-WM
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WM
						30°	1600lm	1350lm	SSR1G2-9403013N-WM
						40°	1600lm	1350lm	SSR1G2-9404013N-WM
						45°	1600lm	1250lm	SSR1G2-9404513N-WM
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WM
						30°	1900lm	1700lm	SSR1G2-9273018N-WM
						40°	1900lm	1700lm	SSR1G2-9274018N-WM
						45°	1900lm	1500lm	SSR1G2-9274518N-WM
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WM
						30°	2000lm	1800lm	SSR1G2-9303018N-WM
						40°	2000lm	1800lm	SSR1G2-9304018N-WM
						45°	2000lm	1600lm	SSR1G2-9304518N-WM
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WM
						30°	2200lm	1900lm	SSR1G2-9403018N-WM
						40°	2200lm	1900lm	SSR1G2-9404018N-WM
						45°	2200lm	1700lm	SSR1G2-9404518N-WM

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WB
						30°	1400lm	1150lm	SSR1G2-9273013N-WB
						40°	1400lm	1150lm	SSR1G2-9274013N-WB
						55°	1400lm	1050lm	SSR1G2-9274513N-WB
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WB
						30°	1500lm	1250lm	SSR1G2-9303013N-WB
						40°	1500lm	1250lm	SSR1G2-9304013N-WB
						55°	1500lm	1150lm	SSR1G2-9304513N-WB
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WB
						30°	1600lm	1350lm	SSR1G2-9403013N-WB
						40°	1600lm	1350lm	SSR1G2-9404013N-WB
						55°	1600lm	1250lm	SSR1G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WB
						30°	1900lm	1700lm	SSR1G2-9273018N-WB
						40°	1900lm	1700lm	SSR1G2-9274018N-WB
						55°	1900lm	1500lm	SSR1G2-9274518N-WB
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WB
						30°	2000lm	1800lm	SSR1G2-9303018N-WB
						40°	2000lm	1800lm	SSR1G2-9304018N-WB
						55°	2000lm	1600lm	SSR1G2-9304518N-WB
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WB
						30°	2200lm	1900lm	SSR1G2-9403018N-WB
						40°	2200lm	1900lm	SSR1G2-9404018N-WB
						55°	2200lm	1700lm	SSR1G2-9404518N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	139,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Dim-to-Warm	
ohne / none	169,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

Dark Light Reflector

13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WC
						30°	1400lm	1150lm	SSR1G2-9273013N-WC
						40°	1400lm	1150lm	SSR1G2-9274013N-WC
						55°	1400lm	1050lm	SSR1G2-9274513N-WC
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WC
						30°	1500lm	1250lm	SSR1G2-9303013N-WC
						40°	1500lm	1250lm	SSR1G2-9304013N-WC
						55°	1500lm	1150lm	SSR1G2-9304513N-WC
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WC
						30°	1600lm	1350lm	SSR1G2-9403013N-WC
						40°	1600lm	1350lm	SSR1G2-9404013N-WC
						55°	1600lm	1250lm	SSR1G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WC
						30°	1900lm	1700lm	SSR1G2-9273018N-WC
						40°	1900lm	1700lm	SSR1G2-9274018N-WC
						55°	1900lm	1500lm	SSR1G2-9274518N-WC
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WC
						30°	2000lm	1800lm	SSR1G2-9303018N-WC
						40°	2000lm	1800lm	SSR1G2-9304018N-WC
						55°	2000lm	1600lm	SSR1G2-9304518N-WC
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WC
						30°	2200lm	1900lm	SSR1G2-9403018N-WC
						40°	2200lm	1900lm	SSR1G2-9404018N-WC
						55°	2200lm	1700lm	SSR1G2-9404518N-WC

White Reflector

13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WW
						30°	1400lm	1150lm	SSR1G2-9273013N-WW
						40°	1400lm	1150lm	SSR1G2-9274013N-WW
						55°	1400lm	1050lm	SSR1G2-9274513N-WW
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WW
						30°	1500lm	1250lm	SSR1G2-9303013N-WW
						40°	1500lm	1250lm	SSR1G2-9304013N-WW
						55°	1500lm	1150lm	SSR1G2-9304513N-WW
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WW
						30°	1600lm	1350lm	SSR1G2-9403013N-WW
						40°	1600lm	1350lm	SSR1G2-9404013N-WW
						55°	1600lm	1250lm	SSR1G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WW
						30°	1900lm	1700lm	SSR1G2-9273018N-WW
						40°	1900lm	1700lm	SSR1G2-9274018N-WW
						55°	1900lm	1500lm	SSR1G2-9274518N-WW
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WW
						30°	2000lm	1800lm	SSR1G2-9303018N-WW
						40°	2000lm	1800lm	SSR1G2-9304018N-WW
						55°	2000lm	1600lm	SSR1G2-9304518N-WW
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WW
						30°	2200lm	1900lm	SSR1G2-9403018N-WW
						40°	2200lm	1900lm	SSR1G2-9404018N-WW
						55°	2200lm	1700lm	SSR1G2-9404518N-WW

Gold Reflector

13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WG
						30°	1400lm	1150lm	SSR1G2-9273013N-WG
						40°	1400lm	1150lm	SSR1G2-9274013N-WG
						45°	1400lm	1050lm	SSR1G2-9274513N-WG
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WG
						30°	1500lm	1250lm	SSR1G2-9303013N-WG
						40°	1500lm	1250lm	SSR1G2-9304013N-WG
						45°	1500lm	1150lm	SSR1G2-9304513N-WG
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WG
						30°	1600lm	1350lm	SSR1G2-9403013N-WG
						40°	1600lm	1350lm	SSR1G2-9404013N-WG
						45°	1600lm	1250lm	SSR1G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WG
						30°	1900lm	1700lm	SSR1G2-9273018N-WG
						40°	1900lm	1700lm	SSR1G2-9274018N-WG
						45°	1900lm	1500lm	SSR1G2-9274518N-WG
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WG
						30°	2000lm	1800lm	SSR1G2-9303018N-WG
						40°	2000lm	1800lm	SSR1G2-9304018N-WG
						45°	2000lm	1600lm	SSR1G2-9304518N-WG
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WG
						30°	2200lm	1900lm	SSR1G2-9403018N-WG
						40°	2200lm	1900lm	SSR1G2-9404018N-WG
						45°	2200lm	1700lm	SSR1G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary

Honeycomb

Code for SSR1G2-9304018N-WM with **H**oneycomb
SSR1G2-9304018N-WM-**H**

Honeycomb: +9,00€

ohne / none	139,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Dim-to-Warm	
ohne / none	169,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

Trimless Version available



Trimless code for SSR1G2-9304013N-WM→ SSR**4**G2-9304013N-WM

Trimless: +10,00€



NEKO / SENSE 100 / S100R1-G2-7W-10°

Adjustable LED Downlight

7W | CRI90 | 2700K 3000K 4000K | 10° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

100 | 1-25mm Ceiling Thickness



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WS
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WS
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WS

Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WM
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WM
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WM

Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WB
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WB
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WB

Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WC
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WC
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WC

white Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WW
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WW
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WW

Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WG
						3000K	10°	850lm	550lm	SSR1G2-9301007N-WG
						4000K	10°	900lm	600lm	SSR1G2-9401007N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	139,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

NEKO / SENSE 100 / S100HR1-G2

Adjustable LED Downlight

25W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

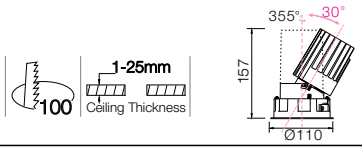

Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WS
						30°	2400lm	2000lm	SHR1G2-9273025N-WS
						40°	2400lm	2000lm	SHR1G2-9274025N-WS
						45°	2400lm	1800lm	SHR1G2-9274525N-WS
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WS
						30°	2600lm	2100lm	SHR1G2-9303025N-WS
						40°	2600lm	2100lm	SHR1G2-9304025N-WS
						45°	2600lm	1900lm	SHR1G2-9304525N-WS
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WS
						30°	2800lm	2200lm	SHR1G2-9403025N-WS
						40°	2800lm	2200lm	SHR1G2-9404025N-WS
						45°	2800lm	1900lm	SHR1G2-9404525N-WS

Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WM
						30°	2400lm	2000lm	SHR1G2-9273025N-WM
						40°	2400lm	2000lm	SHR1G2-9274025N-WM
						45°	2400lm	1800lm	SHR1G2-9274525N-WM
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WM
						30°	2600lm	2100lm	SHR1G2-9303025N-WM
						40°	2600lm	2100lm	SHR1G2-9304025N-WM
						45°	2600lm	1900lm	SHR1G2-9304525N-WM
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WM
						30°	2800lm	2200lm	SHR1G2-9403025N-WM
						40°	2800lm	2200lm	SHR1G2-9404025N-WM
						45°	2800lm	1900lm	SHR1G2-9404525N-WM

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WB
						30°	2400lm	2000lm	SHR1G2-9273025N-WB
						40°	2400lm	2000lm	SHR1G2-9274025N-WB
						45°	2400lm	1800lm	SHR1G2-9274525N-WB
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WB
						30°	2600lm	2100lm	SHR1G2-9303025N-WB
						40°	2600lm	2100lm	SHR1G2-9304025N-WB
						45°	2600lm	1900lm	SHR1G2-9304525N-WB
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WB
						30°	2800lm	2200lm	SHR1G2-9403025N-WB
						40°	2800lm	2200lm	SHR1G2-9404025N-WB
						45°	2800lm	1900lm	SHR1G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WC
						30°	2400lm	2000lm	SHR1G2-9273025N-WC
						40°	2400lm	2000lm	SHR1G2-9274025N-WC
						45°	2400lm	1800lm	SHR1G2-9274525N-WC
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WC
						30°	2600lm	2100lm	SHR1G2-9303025N-WC
						40°	2600lm	2100lm	SHR1G2-9304025N-WC
						45°	2600lm	1900lm	SHR1G2-9304525N-WC
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WC
						30°	2800lm	2200lm	SHR1G2-9403025N-WC
						40°	2800lm	2200lm	SHR1G2-9404025N-WC
						45°	2800lm	1900lm	SHR1G2-9404525N-WC

White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WW
						30°	2400lm	2000lm	SHR1G2-9273025N-WW
						40°	2400lm	2000lm	SHR1G2-9274025N-WW
						45°	2400lm	1800lm	SHR1G2-9274525N-WW
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WW
						30°	2600lm	2100lm	SHR1G2-9303025N-WW
						40°	2600lm	2100lm	SHR1G2-9304025N-WW
						45°	2600lm	1900lm	SHR1G2-9304525N-WW
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WW
						30°	2800lm	2200lm	SHR1G2-9403025N-WW
						40°	2800lm	2200lm	SHR1G2-9404025N-WW
						45°	2800lm	1900lm	SHR1G2-9404525N-WW

Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WG
						30°	2400lm	2000lm	SHR1G2-9273025N-WG
						40°	2400lm	2000lm	SHR1G2-9274025N-WG
						45°	2400lm	1800lm	SHR1G2-9274525N-WG
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WG
						30°	2600lm	2100lm	SHR1G2-9303025N-WG
						40°	2600lm	2100lm	SHR1G2-9304025N-WG
						45°	2600lm	1900lm	SHR1G2-9304525N-WG
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WG
						30°	2800lm	2200lm	SHR1G2-9403025N-WG
						40°	2800lm	2200lm	SHR1G2-9404025N-WG
						45°	2800lm	1900lm	SHR1G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	179,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

NEKO / SENSE 100 / S100S1-G2
Adjustable LED Downlight

13W 18W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





Specular Reflector

Matt Reflector

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WS
						30°	1400lm	1150lm	SSS1G2-9273013N-WS
						40°	1400lm	1150lm	SSS1G2-9274013N-WS
						45°	1400lm	1050lm	SSS1G2-9274513N-WS
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WS
						30°	1500lm	1250lm	SSS1G2-9303013N-WS
						40°	1500lm	1250lm	SSS1G2-9304013N-WS
						45°	1500lm	1150lm	SSS1G2-9304513N-WS
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WS
						30°	1600lm	1350lm	SSS1G2-9403013N-WS
						40°	1600lm	1350lm	SSS1G2-9404013N-WS
						45°	1600lm	1250lm	SSS1G2-9404513N-WS
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WS
						30°	1900lm	1700lm	SSS1G2-9273018N-WS
						40°	1900lm	1700lm	SSS1G2-9274018N-WS
						45°	1900lm	1500lm	SSS1G2-9274518N-WS
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WS
						30°	2000lm	1800lm	SSS1G2-9303018N-WS
						40°	2000lm	1800lm	SSS1G2-9304018N-WS
						45°	2000lm	1600lm	SSS1G2-9304518N-WS
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WS
						30°	2200lm	1900lm	SSS1G2-9403018N-WS
						40°	2200lm	1900lm	SSS1G2-9404018N-WS
						45°	2200lm	1700lm	SSS1G2-9404518N-WS
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WM
						30°	1400lm	1150lm	SSS1G2-9273013N-WM
						40°	1400lm	1150lm	SSS1G2-9274013N-WM
						45°	1400lm	1050lm	SSS1G2-9274513N-WM
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WM
						30°	1500lm	1250lm	SSS1G2-9303013N-WM
						40°	1500lm	1250lm	SSS1G2-9304013N-WM
						45°	1500lm	1150lm	SSS1G2-9304513N-WM
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WM
						30°	1600lm	1350lm	SSS1G2-9403013N-WM
						40°	1600lm	1350lm	SSS1G2-9404013N-WM
						45°	1600lm	1250lm	SSS1G2-9404513N-WM
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WM
						30°	1900lm	1700lm	SSS1G2-9273018N-WM
						40°	1900lm	1700lm	SSS1G2-9274018N-WM
						45°	1900lm	1500lm	SSS1G2-9274518N-WM
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WM
						30°	2000lm	1800lm	SSS1G2-9303018N-WM
						40°	2000lm	1800lm	SSS1G2-9304018N-WM
						45°	2000lm	1600lm	SSS1G2-9304518N-WM
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WM
						30°	2200lm	1900lm	SSS1G2-9403018N-WM
						40°	2200lm	1900lm	SSS1G2-9404018N-WM
						45°	2200lm	1700lm	SSS1G2-9404518N-WM
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WB
						30°	1400lm	1150lm	SSS1G2-9273013N-WB
						40°	1400lm	1150lm	SSS1G2-9274013N-WB
						55°	1400lm	1050lm	SSS1G2-9274513N-WB
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WB
						30°	1500lm	1250lm	SSS1G2-9303013N-WB
						40°	1500lm	1250lm	SSS1G2-9304013N-WB
						55°	1500lm	1150lm	SSS1G2-9304513N-WB
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WB
						30°	1600lm	1350lm	SSS1G2-9403013N-WB
						40°	1600lm	1350lm	SSS1G2-9404013N-WB
						55°	1600lm	1250lm	SSS1G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WB
						30°	1900lm	1700lm	SSS1G2-9273018N-WB
						40°	1900lm	1700lm	SSS1G2-9274018N-WB
						55°	1900lm	1500lm	SSS1G2-9274518N-WB
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WB
						30°	2000lm	1800lm	SSS1G2-9303018N-WB
						40°	2000lm	1800lm	SSS1G2-9304018N-WB
						55°	2000lm	1600lm	SSS1G2-9304518N-WB
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WB
						30°	2200lm	1900lm	SSS1G2-9403018N-WB
						40°	2200lm	1900lm	SSS1G2-9404018N-WB
						55°	2200lm	1700lm	SSS1G2-9404518N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	139,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Dim-to-Warm	
ohne / none	169,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

Dark Light Reflector

13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WC
						30°	1400lm	1150lm	SSS1G2-9273013N-WC
						40°	1400lm	1150lm	SSS1G2-9274013N-WC
						55°	1400lm	1050lm	SSS1G2-9274513N-WC
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WC
						30°	1500lm	1250lm	SSS1G2-9303013N-WC
						40°	1500lm	1250lm	SSS1G2-9304013N-WC
						55°	1500lm	1150lm	SSS1G2-9304513N-WC
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WC
						30°	1600lm	1350lm	SSS1G2-9403013N-WC
						40°	1600lm	1350lm	SSS1G2-9404013N-WC
						55°	1600lm	1250lm	SSS1G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WC
						30°	1900lm	1700lm	SSS1G2-9273018N-WC
						40°	1900lm	1700lm	SSS1G2-9274018N-WC
						55°	1900lm	1500lm	SSS1G2-9274518N-WC
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WC
						30°	2000lm	1800lm	SSS1G2-9303018N-WC
						40°	2000lm	1800lm	SSS1G2-9304018N-WC
						55°	2000lm	1600lm	SSS1G2-9304518N-WC
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WC
						30°	2200lm	1900lm	SSS1G2-9403018N-WC
						40°	2200lm	1900lm	SSS1G2-9404018N-WC
						55°	2200lm	1700lm	SSS1G2-9404518N-WC

White Reflector

13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WW
						30°	1400lm	1150lm	SSS1G2-9273013N-WW
						40°	1400lm	1150lm	SSS1G2-9274013N-WW
						55°	1400lm	1050lm	SSS1G2-9274513N-WW
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WW
						30°	1500lm	1250lm	SSS1G2-9303013N-WW
						40°	1500lm	1250lm	SSS1G2-9304013N-WW
						55°	1500lm	1150lm	SSS1G2-9304513N-WW
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WW
						30°	1600lm	1350lm	SSS1G2-9403013N-WW
						40°	1600lm	1350lm	SSS1G2-9404013N-WW
						55°	1600lm	1250lm	SSS1G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WW
						30°	1900lm	1700lm	SSS1G2-9273018N-WW
						40°	1900lm	1700lm	SSS1G2-9274018N-WW
						55°	1900lm	1500lm	SSS1G2-9274518N-WW
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WW
						30°	2000lm	1800lm	SSS1G2-9303018N-WW
						40°	2000lm	1800lm	SSS1G2-9304018N-WW
						55°	2000lm	1600lm	SSS1G2-9304518N-WW
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WW
						30°	2200lm	1900lm	SSS1G2-9403018N-WW
						40°	2200lm	1900lm	SSS1G2-9404018N-WW
						55°	2200lm	1700lm	SSS1G2-9404518N-WW

Gold Reflector

13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WG
						30°	1400lm	1150lm	SSS1G2-9273013N-WG
						40°	1400lm	1150lm	SSS1G2-9274013N-WG
						45°	1400lm	1050lm	SSS1G2-9274513N-WG
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WG
						30°	1500lm	1250lm	SSS1G2-9303013N-WG
						40°	1500lm	1250lm	SSS1G2-9304013N-WG
						45°	1500lm	1150lm	SSS1G2-9304513N-WG
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WG
						30°	1600lm	1350lm	SSS1G2-9403013N-WG
						40°	1600lm	1350lm	SSS1G2-9404013N-WG
						45°	1600lm	1250lm	SSS1G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WG
						30°	1900lm	1700lm	SSS1G2-9273018N-WG
						40°	1900lm	1700lm	SSS1G2-9274018N-WG
						45°	1900lm	1500lm	SSS1G2-9274518N-WG
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WG
						30°	2000lm	1800lm	SSS1G2-9303018N-WG
						40°	2000lm	1800lm	SSS1G2-9304018N-WG
						45°	2000lm	1600lm	SSS1G2-9304518N-WG
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WG
						30°	2200lm	1900lm	SSS1G2-9403018N-WG
						40°	2200lm	1900lm	SSS1G2-9404018N-WG
						45°	2200lm	1700lm	SSS1G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary

Honeycomb

Code for SSS1G2-9304018N-WM with **Honeycomb** SSS1G2-9304018N-WM-**H**

Honeycomb: +9,00€

ohne / none	139,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Dim-to-Warm	
ohne / none	169,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

Trimless Version available

Trimless code for SSS1G2-9304025N-WM → SSS4G2-9304025N-WM

Trimless: +10,00€



NEKO / SENSE 100 / S100S1-G2-7W-10°

Adjustable LED Downlight

7W | CRI90 | 2700K 3000K 4000K | 10° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek





Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WS
						3000K	10°	850lm	550lm	SSS1G2-9301007N-WS
						4000K	10°	900lm	600lm	SSS1G2-9401007N-WS

Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WM
						3000K	10°	850lm	550lm	SSS1G2-9301007N-WM
						4000K	10°	900lm	600lm	SSS1G2-9401007N-WM

Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WB
						3000K	10°	850lm	550lm	SSS1G2-9301007N-WB
						4000K	10°	900lm	600lm	SSS1G2-9401007N-WB

Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WC
						3000K	10°	850lm	550lm	SSS1G2-9301007N-WC
						4000K	10°	900lm	600lm	SSS1G2-9401007N-WC

white Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WW
						3000K	10°	850lm	550lm	SSS1G2-9301007N-WW
						4000K	10°	900lm	600lm	SSS1G2-9401007N-WW

Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W		9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WG
						3000K	10°	850lm	550lm	SSS1G2-9301007N-WG
						4000K	10°	900lm	600lm	SSS1G2-9401007N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	139,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

NEKO / SENSE 100 / S100HS1-G2

Adjustable LED Downlight

25W | CRI90 | 2700K 3000K 4000K | 18° 30° 40° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

96x96 | 1-25mm Ceiling Thickness



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WS
						30°	2400lm	2000lm	SHS1G2-9273025N-WS
						40°	2400lm	2000lm	SHS1G2-9274025N-WS
						45°	2400lm	1800lm	SHS1G2-9274525N-WS
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WS
						30°	2600lm	2100lm	SHS1G2-9303025N-WS
						40°	2600lm	2100lm	SHS1G2-9304025N-WS
						45°	2600lm	1900lm	SHS1G2-9304525N-WS
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WS
						30°	2800lm	2200lm	SHS1G2-9403025N-WS
						40°	2800lm	2200lm	SHS1G2-9404025N-WS
						45°	2800lm	1900lm	SHS1G2-9404525N-WS

Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WM
						30°	2400lm	2000lm	SHS1G2-9273025N-WM
						40°	2400lm	2000lm	SHS1G2-9274025N-WM
						45°	2400lm	1800lm	SHS1G2-9274525N-WM
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WM
						30°	2600lm	2100lm	SHS1G2-9303025N-WM
						40°	2600lm	2100lm	SHS1G2-9304025N-WM
						45°	2600lm	1900lm	SHS1G2-9304525N-WM
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WM
						30°	2800lm	2200lm	SHS1G2-9403025N-WM
						40°	2800lm	2200lm	SHS1G2-9404025N-WM
						45°	2800lm	1900lm	SHS1G2-9404525N-WM

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WB
						30°	2400lm	2000lm	SHS1G2-9273025N-WB
						40°	2400lm	2000lm	SHS1G2-9274025N-WB
						45°	2400lm	1800lm	SHS1G2-9274525N-WB
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WB
						30°	2600lm	2100lm	SHS1G2-9303025N-WB
						40°	2600lm	2100lm	SHS1G2-9304025N-WB
						45°	2600lm	1900lm	SHS1G2-9304525N-WB
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WB
						30°	2800lm	2200lm	SHS1G2-9403025N-WB
						40°	2800lm	2200lm	SHS1G2-9404025N-WB
						45°	2800lm	1900lm	SHS1G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WC
						30°	2400lm	2000lm	SHS1G2-9273025N-WC
						40°	2400lm	2000lm	SHS1G2-9274025N-WC
						45°	2400lm	1800lm	SHS1G2-9274525N-WC
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WC
						30°	2600lm	2100lm	SHS1G2-9303025N-WC
						40°	2600lm	2100lm	SHS1G2-9304025N-WC
						45°	2600lm	1900lm	SHS1G2-9304525N-WC
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WC
						30°	2800lm	2200lm	SHS1G2-9403025N-WC
						40°	2800lm	2200lm	SHS1G2-9404025N-WC
						45°	2800lm	1900lm	SHS1G2-9404525N-WC

White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WW
						30°	2400lm	2000lm	SHS1G2-9273025N-WW
						40°	2400lm	2000lm	SHS1G2-9274025N-WW
						45°	2400lm	1800lm	SHS1G2-9274525N-WW
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WW
						30°	2600lm	2100lm	SHS1G2-9303025N-WW
						40°	2600lm	2100lm	SHS1G2-9304025N-WW
						45°	2600lm	1900lm	SHS1G2-9304525N-WW
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WW
						30°	2800lm	2200lm	SHS1G2-9403025N-WW
						40°	2800lm	2200lm	SHS1G2-9404025N-WW
						45°	2800lm	1900lm	SHS1G2-9404525N-WW

Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WG
						30°	2400lm	2000lm	SHS1G2-9273025N-WG
						40°	2400lm	2000lm	SHS1G2-9274025N-WG
						45°	2400lm	1800lm	SHS1G2-9274525N-WG
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WG
						30°	2600lm	2100lm	SHS1G2-9303025N-WG
						40°	2600lm	2100lm	SHS1G2-9304025N-WG
						45°	2600lm	1900lm	SHS1G2-9304525N-WG
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WG
						30°	2800lm	2200lm	SHS1G2-9403025N-WG
						40°	2800lm	2200lm	SHS1G2-9404025N-WG
						45°	2800lm	1900lm	SHS1G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	179,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

NEKO / SENSE 100 / S100R2-G2
Fixed LED Downlight

13W 18W | CRI90 | 2700K 3000K 4000K | 20° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

100 | 1-25mm Ceiling Thickness



Specular Reflector

Matt Reflector

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WS
						36°	1400lm	1000lm	SSR2G2-9273613N-WS
						45°	1400lm	1000lm	SSR2G2-9274513N-WS
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WS
						36°	1500lm	1100lm	SSR2G2-9303613N-WS
						45°	1500lm	1100lm	SSR2G2-9304513N-WS
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WS
						36°	1600lm	1200lm	SSR2G2-9403613N-WS
						45°	1600lm	1200lm	SSR2G2-9404513N-WS
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WS
						36°	1900lm	1500lm	SSR2G2-9273618N-WS
						45°	1900lm	1500lm	SSR2G2-9274518N-WS
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WS
						36°	2000lm	1600lm	SSR2G2-9303618N-WS
						45°	2000lm	1600lm	SSR2G2-9304518N-WS
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WS
						36°	2200lm	1700lm	SSR2G2-9403618N-WS
						45°	2200lm	1700lm	SSR2G2-9404518N-WS
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WM
						36°	1400lm	1000lm	SSR2G2-9273613N-WM
						45°	1400lm	1000lm	SSR2G2-9274513N-WM
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WM
						36°	1500lm	1100lm	SSR2G2-9303613N-WM
						45°	1500lm	1100lm	SSR2G2-9304513N-WM
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WM
						36°	1600lm	1200lm	SSR2G2-9403613N-WM
						45°	1600lm	1200lm	SSR2G2-9404513N-WM
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WM
						36°	1900lm	1500lm	SSR2G2-9273618N-WM
						45°	1900lm	1500lm	SSR2G2-9274518N-WM
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WM
						36°	2000lm	1600lm	SSR2G2-9303618N-WM
						45°	2000lm	1600lm	SSR2G2-9304518N-WM
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WM
						36°	2200lm	1700lm	SSR2G2-9403618N-WM
						45°	2200lm	1700lm	SSR2G2-9404518N-WM
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WB
						36°	1400lm	1000lm	SSR2G2-9273613N-WB
						45°	1400lm	1000lm	SSR2G2-9274513N-WB
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WB
						36°	1500lm	1100lm	SSR2G2-9303613N-WB
						45°	1500lm	1100lm	SSR2G2-9304513N-WB
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WB
						36°	1600lm	1200lm	SSR2G2-9403613N-WB
						45°	1600lm	1200lm	SSR2G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WB
						36°	1900lm	1500lm	SSR2G2-9273618N-WB
						45°	1900lm	1500lm	SSR2G2-9274518N-WB
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WB
						36°	2000lm	1600lm	SSR2G2-9303618N-WB
						45°	2000lm	1600lm	SSR2G2-9304518N-WB
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WB
						36°	2200lm	1700lm	SSR2G2-9403618N-WB
						45°	2200lm	1700lm	SSR2G2-9404518N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	139,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Dim-to-Warm	
ohne / none	169,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

Dark Light Reflector

13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WC
						36°	1400lm	1000lm	SSR2G2-9273613N-WC
						45°	1400lm	1000lm	SSR2G2-9274513N-WC
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WC
						36°	1500lm	1100lm	SSR2G2-9303613N-WC
						45°	1500lm	1100lm	SSR2G2-9304513N-WC
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WC
						36°	1600lm	1200lm	SSR2G2-9403613N-WC
						45°	1600lm	1200lm	SSR2G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WC
						36°	1900lm	1500lm	SSR2G2-9273618N-WC
						45°	1900lm	1500lm	SSR2G2-9274518N-WC
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WC
						36°	2000lm	1600lm	SSR2G2-9303618N-WC
						45°	2000lm	1600lm	SSR2G2-9304518N-WC
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WC
						36°	2200lm	1700lm	SSR2G2-9403618N-WC
						45°	2200lm	1700lm	SSR2G2-9404518N-WC

White Reflector

13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WW
						36°	1400lm	1000lm	SSR2G2-9273613N-WW
						45°	1400lm	1000lm	SSR2G2-9274513N-WW
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WW
						36°	1500lm	1100lm	SSR2G2-9303613N-WW
						45°	1500lm	1100lm	SSR2G2-9304513N-WW
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WW
						36°	1600lm	1200lm	SSR2G2-9403613N-WW
						45°	1600lm	1200lm	SSR2G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WW
						36°	1900lm	1500lm	SSR2G2-9273618N-WW
						45°	1900lm	1500lm	SSR2G2-9274518N-WW
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WW
						36°	2000lm	1600lm	SSR2G2-9303618N-WW
						45°	2000lm	1600lm	SSR2G2-9304518N-WW
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WW
						36°	2200lm	1700lm	SSR2G2-9403618N-WW
						45°	2200lm	1700lm	SSR2G2-9404518N-WW

White Reflector

13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WG
						36°	1400lm	1000lm	SSR2G2-9273613N-WG
						45°	1400lm	1000lm	SSR2G2-9274513N-WG
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WG
						36°	1500lm	1100lm	SSR2G2-9303613N-WG
						45°	1500lm	1100lm	SSR2G2-9304513N-WG
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WG
						36°	1600lm	1200lm	SSR2G2-9403613N-WG
						45°	1600lm	1200lm	SSR2G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WG
						36°	1900lm	1500lm	SSR2G2-9273618N-WG
						45°	1900lm	1500lm	SSR2G2-9274518N-WG
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WG
						36°	2000lm	1600lm	SSR2G2-9303618N-WG
						45°	2000lm	1600lm	SSR2G2-9304518N-WG
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WG
						36°	2200lm	1700lm	SSR2G2-9403618N-WG
						45°	2200lm	1700lm	SSR2G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary

Honeycomb

Code for SSR2G2-9303618N-WM with Honeycomb
SSR2G2-9303618N-WM-H

Honeycomb: +9,00€

ohne / none	139,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Dim-to-Warm	
ohne / none	169,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

Trimless Version available

Trimless code for SSR2G2-9303618N-WM → SSR5G2-9303618N-WM

Trimless: +10,00€



NEKO / SENSE 100 / S100HR2-G2

Fixed LED Downlight

25W | CRI90 | 2700K 3000K 4000K | 20° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

100 | 1-25mm Ceiling Thickness



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WS
						36°	2400lm	1900lm	SHR2G2-9273625N-WS
						45°	2400lm	1900lm	SHR2G2-9274525N-WS
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WS
						36°	2600lm	2000lm	SHR2G2-9303625N-WS
						45°	2600lm	2000lm	SHR2G2-9304525N-WS
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WS
						36°	2800lm	2100lm	SHR2G2-9403625N-WS
						45°	2800lm	2100lm	SHR2G2-9404525N-WS

Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WM
						36°	2400lm	1900lm	SHR2G2-9273625N-WM
						45°	2400lm	1900lm	SHR2G2-9274525N-WM
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WM
						36°	2600lm	2000lm	SHR2G2-9303625N-WM
						45°	2600lm	2000lm	SHR2G2-9304525N-WM
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WM
						36°	2800lm	2100lm	SHR2G2-9403625N-WM
						45°	2800lm	2100lm	SHR2G2-9404525N-WM

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WB
						36°	2400lm	1900lm	SHR2G2-9273625N-WB
						45°	2400lm	1900lm	SHR2G2-9274525N-WB
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WB
						36°	2600lm	2000lm	SHR2G2-9303625N-WB
						45°	2600lm	2000lm	SHR2G2-9304525N-WB
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WB
						36°	2800lm	2100lm	SHR2G2-9403625N-WB
						45°	2800lm	2100lm	SHR2G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WC
						36°	2400lm	1900lm	SHR2G2-9273625N-WC
						45°	2400lm	1900lm	SHR2G2-9274525N-WC
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WC
						36°	2600lm	2000lm	SHR2G2-9303625N-WC
						45°	2600lm	2000lm	SHR2G2-9304525N-WC
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WC
						36°	2800lm	2100lm	SHR2G2-9403625N-WC
						45°	2800lm	2100lm	SHR2G2-9404525N-WC

White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WW
						36°	2400lm	1900lm	SHR2G2-9273625N-WW
						45°	2400lm	1900lm	SHR2G2-9274525N-WW
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WW
						36°	2600lm	2000lm	SHR2G2-9303625N-WW
						45°	2600lm	2000lm	SHR2G2-9304525N-WW
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WW
						36°	2800lm	2100lm	SHR2G2-9403625N-WW
						45°	2800lm	2100lm	SHR2G2-9404525N-WW

Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHR2G2-9272025N-WG
						36°	2400lm	1900lm	SHR2G2-9273625N-WG
						45°	2400lm	1900lm	SHR2G2-9274525N-WG
					3000K	20°	2600lm	1800lm	SHR2G2-9302025N-WG
						36°	2600lm	2000lm	SHR2G2-9303625N-WG
						45°	2600lm	2000lm	SHR2G2-9304525N-WG
					4000K	20°	2800lm	1900lm	SHR2G2-9402025N-WG
						36°	2800lm	2100lm	SHR2G2-9403625N-WG
						45°	2800lm	2100lm	SHR2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	179,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

NEKO / SENSE 100 / S100S2-G2
Fixed LED Downlight

13W 18W | CRI90 | 2700K 3000K 4000K | 20° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

96x96 | 1-25mm Ceiling Thickness | 131 | 107x107

Specular Reflector

Matt Reflector

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WS
						36°	1400lm	1000lm	SSS2G2-9273613N-WS
						45°	1400lm	1000lm	SSS2G2-9274513N-WS
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WS
						36°	1500lm	1100lm	SSS2G2-9303613N-WS
						45°	1500lm	1100lm	SSS2G2-9304513N-WS
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WS
						36°	1600lm	1200lm	SSS2G2-9403613N-WS
						45°	1600lm	1200lm	SSS2G2-9404513N-WS
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WS
						36°	1900lm	1500lm	SSS2G2-9273618N-WS
						45°	1900lm	1500lm	SSS2G2-9274518N-WS
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WS
						36°	2000lm	1600lm	SSS2G2-9303618N-WS
						45°	2000lm	1600lm	SSS2G2-9304518N-WS
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WS
						36°	2200lm	1700lm	SSS2G2-9403618N-WS
						45°	2200lm	1700lm	SSS2G2-9404518N-WS
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WM
						36°	1400lm	1000lm	SSS2G2-9273613N-WM
						45°	1400lm	1000lm	SSS2G2-9274513N-WM
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WM
						36°	1500lm	1100lm	SSS2G2-9303613N-WM
						45°	1500lm	1100lm	SSS2G2-9304513N-WM
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WM
						36°	1600lm	1200lm	SSS2G2-9403613N-WM
						45°	1600lm	1200lm	SSS2G2-9404513N-WM
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WM
						36°	1900lm	1500lm	SSS2G2-9273618N-WM
						45°	1900lm	1500lm	SSS2G2-9274518N-WM
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WM
						36°	2000lm	1600lm	SSS2G2-9303618N-WM
						45°	2000lm	1600lm	SSS2G2-9304518N-WM
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WM
						36°	2200lm	1700lm	SSS2G2-9403618N-WM
						45°	2200lm	1700lm	SSS2G2-9404518N-WM
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WB
						36°	1400lm	1000lm	SSS2G2-9273613N-WB
						45°	1400lm	1000lm	SSS2G2-9274513N-WB
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WB
						36°	1500lm	1100lm	SSS2G2-9303613N-WB
						45°	1500lm	1100lm	SSS2G2-9304513N-WB
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WB
						36°	1600lm	1200lm	SSS2G2-9403613N-WB
						45°	1600lm	1200lm	SSS2G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WB
						36°	1900lm	1500lm	SSS2G2-9273618N-WB
						45°	1900lm	1500lm	SSS2G2-9274518N-WB
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WB
						36°	2000lm	1600lm	SSS2G2-9303618N-WB
						45°	2000lm	1600lm	SSS2G2-9304518N-WB
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WB
						36°	2200lm	1700lm	SSS2G2-9403618N-WB
						45°	2200lm	1700lm	SSS2G2-9404518N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	139,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Dim-to-Warm	
ohne / none	169,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

Dark Light Reflector

13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WC
						36°	1400lm	1000lm	SSS2G2-9273613N-WC
						45°	1400lm	1000lm	SSS2G2-9274513N-WC
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WC
						36°	1500lm	1100lm	SSS2G2-9303613N-WC
						45°	1500lm	1100lm	SSS2G2-9304513N-WC
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WC
						36°	1600lm	1200lm	SSS2G2-9403613N-WC
						45°	1600lm	1200lm	SSS2G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WC
						36°	1900lm	1500lm	SSS2G2-9273618N-WC
						45°	1900lm	1500lm	SSS2G2-9274518N-WC
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WC
						36°	2000lm	1600lm	SSS2G2-9303618N-WC
						45°	2000lm	1600lm	SSS2G2-9304518N-WC
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WC
						36°	2200lm	1700lm	SSS2G2-9403618N-WC
						45°	2200lm	1700lm	SSS2G2-9404518N-WC

White Reflector

13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WW
						36°	1400lm	1000lm	SSS2G2-9273613N-WW
						45°	1400lm	1000lm	SSS2G2-9274513N-WW
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WW
						36°	1500lm	1100lm	SSS2G2-9303613N-WW
						45°	1500lm	1100lm	SSS2G2-9304513N-WW
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WW
						36°	1600lm	1200lm	SSS2G2-9403613N-WW
						45°	1600lm	1200lm	SSS2G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WW
						36°	1900lm	1500lm	SSS2G2-9273618N-WW
						45°	1900lm	1500lm	SSS2G2-9274518N-WW
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WW
						36°	2000lm	1600lm	SSS2G2-9303618N-WW
						45°	2000lm	1600lm	SSS2G2-9304518N-WW
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WW
						36°	2200lm	1700lm	SSS2G2-9403618N-WW
						45°	2200lm	1700lm	SSS2G2-9404518N-WW

White Reflector

13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WG
						36°	1400lm	1000lm	SSS2G2-9273613N-WG
						45°	1400lm	1000lm	SSS2G2-9274513N-WG
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WG
						36°	1500lm	1100lm	SSS2G2-9303613N-WG
						45°	1500lm	1100lm	SSS2G2-9304513N-WG
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WG
						36°	1600lm	1200lm	SSS2G2-9403613N-WG
						45°	1600lm	1200lm	SSS2G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WG
						36°	1900lm	1500lm	SSS2G2-9273618N-WG
						45°	1900lm	1500lm	SSS2G2-9274518N-WG
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WG
						36°	2000lm	1600lm	SSS2G2-9303618N-WG
						45°	2000lm	1600lm	SSS2G2-9304518N-WG
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WG
						36°	2200lm	1700lm	SSS2G2-9403618N-WG
						45°	2200lm	1700lm	SSR2G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary

Honeycomb

Code for SSS2G2-9303618N-WM with Honeycomb
SSS2G2-9303618N-WM-H

Honeycomb: +9,00€

ohne / none	139,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Dim-to-Warm	
ohne / none	169,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

Trimless Version available



Trimless code for SSS2G2-9303618N-WM → SSR5G2-9303618N-WM

Trimless: +10,00€



NEKO / SENSE 100 / S100HS2-G2

Fixed LED Downlight

25W | CRI90 | 2700K 3000K 4000K | 20° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

96x96 | 1-25mm Ceiling Thickness



Specular Reflector

Matt Reflector

Black Reflector

Dark Light Reflector

White Reflector

Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WS
						36°	2400lm	1900lm	SHS2G2-9273625N-WS
						45°	2400lm	1900lm	SHS2G2-9274525N-WS
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WS
						36°	2600lm	2000lm	SHS2G2-9303625N-WS
						45°	2600lm	2000lm	SHS2G2-9304525N-WS
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WS
						36°	2800lm	2100lm	SHS2G2-9403625N-WS
						45°	2800lm	2100lm	SHS2G2-9404525N-WS
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WM
						36°	2400lm	1900lm	SHS2G2-9273625N-WM
						45°	2400lm	1900lm	SHS2G2-9274525N-WM
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WM
						36°	2600lm	2000lm	SHS2G2-9303625N-WM
						45°	2600lm	2000lm	SHS2G2-9304525N-WM
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WM
						36°	2800lm	2100lm	SHS2G2-9403625N-WM
						45°	2800lm	2100lm	SHS2G2-9404525N-WM
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WB
						36°	2400lm	1900lm	SHS2G2-9273625N-WB
						45°	2400lm	1900lm	SHS2G2-9274525N-WB
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WB
						36°	2600lm	2000lm	SHS2G2-9303625N-WB
						45°	2600lm	2000lm	SHS2G2-9304525N-WB
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WB
						36°	2800lm	2100lm	SHS2G2-9403625N-WB
						45°	2800lm	2100lm	SHS2G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WC
						36°	2400lm	1900lm	SHS2G2-9273625N-WC
						45°	2400lm	1900lm	SHS2G2-9274525N-WC
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WC
						36°	2600lm	2000lm	SHS2G2-9303625N-WC
						45°	2600lm	2000lm	SHS2G2-9304525N-WC
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WC
						36°	2800lm	2100lm	SHS2G2-9403625N-WC
						45°	2800lm	2100lm	SHS2G2-9404525N-WC
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WW
						36°	2400lm	1900lm	SHS2G2-9273625N-WW
						45°	2400lm	1900lm	SHS2G2-9274525N-WW
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WW
						36°	2600lm	2000lm	SHS2G2-9303625N-WW
						45°	2600lm	2000lm	SHS2G2-9304525N-WW
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WW
						36°	2800lm	2100lm	SHS2G2-9403625N-WW
						45°	2800lm	2100lm	SHS2G2-9404525N-WW
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1700lm	SHS2G2-9272025N-WG
						36°	2400lm	1900lm	SHS2G2-9273625N-WG
						45°	2400lm	1900lm	SHS2G2-9274525N-WG
					3000K	20°	2600lm	1800lm	SHS2G2-9302025N-WG
						36°	2600lm	2000lm	SHS2G2-9303625N-WG
						45°	2600lm	2000lm	SHS2G2-9304525N-WG
					4000K	20°	2800lm	1900lm	SHS2G2-9402025N-WG
						36°	2800lm	2100lm	SHS2G2-9403625N-WG
						45°	2800lm	2100lm	SHS2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	179,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

NEKO / SENSE 100 / S100R3-G2
Wall Washer LED Downlight

13W 18W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

100 | 1-25mm Ceiling Thickness



Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	650lm	SSR3G2-927WW13N-WM
						3000K	Wall Washer	1500lm	680lm	SSR3G2-930WW13N-WM
						4000K	Wall Washer	1600lm	750lm	SSR3G2-940WW13N-WM
18	W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SSR3G2-927WW18N-WM
						3000K	Wall Washer	2000lm	900lm	SSR3G2-930WW18N-WM
						4000K	Wall Washer	2200lm	1000lm	SSR3G2-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SSR3G2-930WW13N-WM → SSR6G2-930WW13N-WM

Trimless: +10,00€

100



ohne / none	169,00 €
ON-OFF	189,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

NEKO / SENSE 100 / S100HR3-G2
Wall Washer LED Downlight

25W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

100 | 1-25mm Ceiling Thickness



Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1000lm	SHR3G2-927WW25N-WM
						3000K	Wall Washer	2600lm	1100lm	SHR3G2-930WW25N-WM
						4000K	Wall Washer	2800lm	1200lm	SHR3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SHR3G2-930WW25N-WM → SHR6G2-930WW25N-WM

Trimless: +10,00€

100



ohne / none	209,00 €
ON-OFF	229,00 €
Phase Dim	239,00 €
DALI Dim	259,00 €

NEKO / SENSE 100 / S100S3-G2
Wall Washer LED Downlight

13W 18W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

96x96 | 1-25mm Ceiling Thickness | 131 | 107x107

Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	650lm	SSS3G2-927WW13N-WM
						3000K	Wall Washer	1500lm	680lm	SSS3G2-930WW13N-WM
						4000K	Wall Washer	1600lm	750lm	SSS3G2-940WW13N-WM
18	W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SSS3G2-927WW18N-WM
						3000K	Wall Washer	2000lm	900lm	SSS3G2-930WW18N-WM
						4000K	Wall Washer	2200lm	1000lm	SSS3G2-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available

Trimless code for SSS3G2-930WW13N-WM → SSS6G2-930WW13N-WM

Trimless: +10,00€

96x96 | 131 | 91X91 | 202

ohne / none	169,00 €
ON-OFF	189,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

NEKO / SENSE 100 / S100HS3-G2
Wall Washer LED Downlight

25W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

96x96 | 1-25mm Ceiling Thickness | 157 | 107x107

Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1000lm	SHS3G2-927WW25N-WM
						3000K	Wall Washer	2600lm	1100lm	SHS3G2-930WW25N-WM
						4000K	Wall Washer	2800lm	1200lm	SHS3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SHS3G2-930WW13N-WM → SHS6G2-930WW13N-WM

Trimless: +10,00€

96x96 | 157 | 91x91 | 193x193

ohne / none	209,00 €
ON-OFF	229,00 €
Phase Dim	239,00 €
DALI Dim	259,00 €

NEKO / SENSE 125 / S125R1-G2

Adjustable LED Downlight

18W 25W | CRI90 | 2700K 3000K 4000K | 20° 38° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

125 | 1-25mm Ceiling Thickness



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WS
						38°	1900lm	1500lm	SMR1G2-9273818N-WS
						50°	1900lm	1300lm	SMR1G2-9275018N-WS
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WS
						38°	2000lm	1600lm	SMR1G2-9303818N-WS
						50°	2000lm	1400lm	SMR1G2-9305018N-WS
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WS
						38°	2200lm	1700lm	SMR1G2-9403818N-WS
						50°	2200lm	1500lm	SMR1G2-9405018N-WS
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WS
						38°	2400lm	2100lm	SMR1G2-9273825N-WS
						50°	2400lm	1900lm	SMR1G2-9275025N-WS
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WS
						38°	2600lm	2200lm	SMR1G2-9303825N-WS
						50°	2600lm	2000lm	SMR1G2-9305025N-WS
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WS
						38°	2800lm	2400lm	SMR1G2-9403825N-WS
						50°	2800lm	2200lm	SMR1G2-9405025N-WS

Matt Reflector

18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WM
						38°	1900lm	1500lm	SMR1G2-9273818N-WM
						50°	1900lm	1300lm	SMR1G2-9275018N-WM
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WM
						38°	2000lm	1600lm	SMR1G2-9303818N-WM
						50°	2000lm	1400lm	SMR1G2-9305018N-WM
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WM
						38°	2200lm	1700lm	SMR1G2-9403818N-WM
						50°	2200lm	1500lm	SMR1G2-9405018N-WM
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WM
						38°	2400lm	2100lm	SMR1G2-9273825N-WM
						50°	2400lm	1900lm	SMR1G2-9275025N-WM
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WM
						38°	2600lm	2200lm	SMR1G2-9303825N-WM
						50°	2600lm	2000lm	SMR1G2-9305025N-WM
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WM
						38°	2800lm	2400lm	SMR1G2-9403825N-WM
						50°	2800lm	2200lm	SMR1G2-9405025N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Black Reflector

18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WB
						38°	1900lm	1500lm	SMR1G2-9273818N-WB
						50°	1900lm	1300lm	SMR1G2-9275018N-WB
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WB
						38°	2000lm	1600lm	SMR1G2-9303818N-WB
						50°	2000lm	1400lm	SMR1G2-9305018N-WB
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WB
						38°	2200lm	1700lm	SMR1G2-9403818N-WB
						50°	2200lm	1500lm	SMR1G2-9405018N-WB
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WB
						38°	2400lm	2100lm	SMR1G2-9273825N-WB
						50°	2400lm	1900lm	SMR1G2-9275025N-WB
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WB
						38°	2600lm	2200lm	SMR1G2-9303825N-WB
						50°	2600lm	2000lm	SMR1G2-9305025N-WB
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WB
						38°	2800lm	2400lm	SMR1G2-9403825N-WB
						50°	2800lm	2200lm	SMR1G2-9405025N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	189,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

Dark Light Reflector

18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WC
						38°	1900lm	1500lm	SMR1G2-9273818N-WC
						50°	1900lm	1300lm	SMR1G2-9275018N-WC
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WC
						38°	2000lm	1600lm	SMR1G2-9303818N-WC
						50°	2000lm	1400lm	SMR1G2-9305018N-WC
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WC
						38°	2200lm	1700lm	SMR1G2-9403818N-WC
						50°	2200lm	1500lm	SMR1G2-9405018N-WC
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WC
						38°	2400lm	2100lm	SMR1G2-9273825N-WC
						50°	2400lm	1900lm	SMR1G2-9275025N-WC
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WC
						38°	2600lm	2200lm	SMR1G2-9303825N-WC
						50°	2600lm	2000lm	SMR1G2-9305025N-WC
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WC
						38°	2800lm	2400lm	SMR1G2-9403825N-WC
						50°	2800lm	2200lm	SMR1G2-9405025N-WC

White Reflector

18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WW
						38°	1900lm	1500lm	SMR1G2-9273818N-WW
						50°	1900lm	1300lm	SMR1G2-9275018N-WW
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WW
						38°	2000lm	1600lm	SMR1G2-9303818N-WW
						50°	2000lm	1400lm	SMR1G2-9305018N-WW
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WW
						38°	2200lm	1700lm	SMR1G2-9403818N-WW
						50°	2200lm	1500lm	SMR1G2-9405018N-WW
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WW
						38°	2400lm	2100lm	SMR1G2-9273825N-WW
						50°	2400lm	1900lm	SMR1G2-9275025N-WW
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WW
						38°	2600lm	2200lm	SMR1G2-9303825N-WW
						50°	2600lm	2000lm	SMR1G2-9305025N-WW
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WW
						38°	2800lm	2400lm	SMR1G2-9403825N-WW
						50°	2800lm	2200lm	SMR1G2-9405025N-WW

Gold Reflector

18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WG
						38°	1900lm	1500lm	SMR1G2-9273818N-WG
						50°	1900lm	1300lm	SMR1G2-9275018N-WG
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WG
						38°	2000lm	1600lm	SMR1G2-9303818N-WG
						50°	2000lm	1400lm	SMR1G2-9305018N-WG
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WG
						38°	2200lm	1700lm	SMR1G2-9403818N-WG
						50°	2200lm	1500lm	SMR1G2-9405018N-WG
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WG
						38°	2400lm	2100lm	SMR1G2-9273825N-WG
						50°	2400lm	1900lm	SMR1G2-9275025N-WG
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WG
						38°	2600lm	2200lm	SMR1G2-9303825N-WG
						50°	2600lm	2000lm	SMR1G2-9305025N-WG
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WG
						38°	2800lm	2400lm	SMR1G2-9403825N-WG
						50°	2800lm	2200lm	SMR1G2-9405025N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Honeycomb

Code for SMR1G2-9405025N-WM with Honeycomb
SMR1G2-9405025N-WM-H

Honeycomb: +9,00€

ohne / none	189,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €



Trimless code for SMR1G2-9305025N-WM → SMR4G2-9304025N-WM



Trimless: +10,00€

Trimless code for SMR1G2-9305025N-WM → FMR1G2-9305025N-WM

NEKO / SENSE 125 / S125S1-G2
Adjustable LED Downlight

18W 25W | CRI90 | 2700K 3000K 4000K | 20° 38° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek



Specular Reflector

Matt Reflector

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WS
						38°	1900lm	1500lm	SMS1G2-9273818N-WS
						50°	1900lm	1300lm	SMS1G2-9275018N-WS
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WS
						38°	2000lm	1600lm	SMS1G2-9303818N-WS
						50°	2000lm	1400lm	SMS1G2-9305018N-WS
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WS
						38°	2200lm	1700lm	SMS1G2-9403818N-WS
						50°	2200lm	1500lm	SMS1G2-9405018N-WS
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WS
						38°	2400lm	2100lm	SMS1G2-9273825N-WS
						50°	2400lm	1900lm	SMS1G2-9275025N-WS
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WS
						38°	2600lm	2200lm	SMS1G2-9303825N-WS
						50°	2600lm	2000lm	SMS1G2-9305025N-WS
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WS
						38°	2800lm	2400lm	SMS1G2-9403825N-WS
						50°	2800lm	2200lm	SMS1G2-9405025N-WS
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WM
						38°	1900lm	1500lm	SMS1G2-9273818N-WM
						50°	1900lm	1300lm	SMS1G2-9275018N-WM
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WM
						38°	2000lm	1600lm	SMS1G2-9303818N-WM
						50°	2000lm	1400lm	SMS1G2-9305018N-WM
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WM
						38°	2200lm	1700lm	SMS1G2-9403818N-WM
						50°	2200lm	1500lm	SMS1G2-9405018N-WM
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WM
						38°	2400lm	2100lm	SMS1G2-9273825N-WM
						50°	2400lm	1900lm	SMS1G2-9275025N-WM
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WM
						38°	2600lm	2200lm	SMS1G2-9303825N-WM
						50°	2600lm	2000lm	SMS1G2-9305025N-WM
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WM
						38°	2800lm	2400lm	SMS1G2-9403825N-WM
						50°	2800lm	2200lm	SMS1G2-9405025N-WM
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WB
						38°	1900lm	1500lm	SMS1G2-9273818N-WB
						50°	1900lm	1300lm	SMS1G2-9275018N-WB
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WB
						38°	2000lm	1600lm	SMS1G2-9303818N-WB
						50°	2000lm	1400lm	SMS1G2-9305018N-WB
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WB
						38°	2200lm	1700lm	SMS1G2-9403818N-WB
						50°	2200lm	1500lm	SMS1G2-9405018N-WB
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WB
						38°	2400lm	2100lm	SMS1G2-9273825N-WB
						50°	2400lm	1900lm	SMS1G2-9275025N-WB
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WB
						38°	2600lm	2200lm	SMS1G2-9303825N-WB
						50°	2600lm	2000lm	SMS1G2-9305025N-WB
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WB
						38°	2800lm	2400lm	SMS1G2-9403825N-WB
						50°	2800lm	2200lm	SMS1G2-9405025N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	189,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

Dark Light Reflector

18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WC
						38°	1900lm	1500lm	SMS1G2-9273818N-WC
						50°	1900lm	1300lm	SMS1G2-9275018N-WC
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WC
						38°	2000lm	1600lm	SMS1G2-9303818N-WC
						50°	2000lm	1400lm	SMS1G2-9305018N-WC
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WC
						38°	2200lm	1700lm	SMS1G2-9403818N-WC
						50°	2200lm	1500lm	SMS1G2-9405018N-WC
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WC
						38°	2400lm	2100lm	SMS1G2-9273825N-WC
						50°	2400lm	1900lm	SMS1G2-9275025N-WC
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WC
						38°	2600lm	2200lm	SMS1G2-9303825N-WC
						50°	2600lm	2000lm	SMS1G2-9305025N-WC
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WC
						38°	2800lm	2400lm	SMS1G2-9403825N-WC
						50°	2800lm	2200lm	SMS1G2-9405025N-WC

White Reflector

18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WW
						38°	1900lm	1500lm	SMS1G2-9273818N-WW
						50°	1900lm	1300lm	SMS1G2-9275018N-WW
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WW
						38°	2000lm	1600lm	SMS1G2-9303818N-WW
						50°	2000lm	1400lm	SMS1G2-9305018N-WW
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WW
						38°	2200lm	1700lm	SMS1G2-9403818N-WW
						50°	2200lm	1500lm	SMS1G2-9405018N-WW
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WW
						38°	2400lm	2100lm	SMS1G2-9273825N-WW
						50°	2400lm	1900lm	SMS1G2-9275025N-WW
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WW
						38°	2600lm	2200lm	SMS1G2-9303825N-WW
						50°	2600lm	2000lm	SMS1G2-9305025N-WW
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WW
						38°	2800lm	2400lm	SMS1G2-9403825N-WW
						50°	2800lm	2200lm	SMS1G2-9405025N-WW

Gold Reflector

18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WG
						38°	1900lm	1500lm	SMS1G2-9273818N-WG
						50°	1900lm	1300lm	SMS1G2-9275018N-WG
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WG
						38°	2000lm	1600lm	SMS1G2-9303818N-WG
						50°	2000lm	1400lm	SMS1G2-9305018N-WG
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WG
						38°	2200lm	1700lm	SMS1G2-9403818N-WG
						50°	2200lm	1500lm	SMS1G2-9405018N-WG
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WG
						38°	2400lm	2100lm	SMS1G2-9273825N-WG
						50°	2400lm	1900lm	SMS1G2-9275025N-WG
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WG
						38°	2600lm	2200lm	SMS1G2-9303825N-WG
						50°	2600lm	2000lm	SMS1G2-9305025N-WG
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WG
						38°	2800lm	2400lm	SMS1G2-9403825N-WG
						50°	2800lm	2200lm	SMS1G2-9405025N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Honeycomb
HCSR68

Code for SMS1G2-9405025N-WM with Honeycomb
SMS1G2-9405025N-WM-H

Honeycomb: +9,00€

ohne / none	189,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €



Trimless code for SMS1G2-9305025N-WM → SMS4G2-9304025N-WM

Trimless: +10,00€



NEKO / SENSE 125 / S125R2-G2

Fixed LED Downlight

18W 25W | CRI90 | 2700K 3000K 4000K | 24° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

125 | 1-25mm Ceiling Thickness



Specular Reflector

Matt Reflector

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WS
						36°	1900lm	1400lm	SMR2G2-9273618N-WS
						45°	1900lm	1200lm	SMR2G2-9274518N-WS
					3000K	24	2000lm	1500lm	SMR2G2-9302018N-WS
						36°	2000lm	1500lm	SMR2G2-9303618N-WS
						45°	2000lm	1300lm	SMR2G2-9304518N-WS
					4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WS
						36°	2200lm	1600lm	SMR2G2-9403618N-WS
						45°	2200lm	1400lm	SMR2G2-9404518N-WS
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WS
						36°	2400lm	2000lm	SMR2G2-9273525N-WS
						45°	2400lm	1800lm	SMR2G2-9274525N-WS
					3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WS
						36°	2600lm	2100lm	SMR2G2-9303625N-WS
						45°	2600lm	1900lm	SMR2G2-9304525N-WS
					4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WS
						36°	2800lm	2300lm	SMR2G2-9403625N-WS
						45°	2800lm	2050lm	SMR2G2-9404525N-WS
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WM
						36°	1900lm	1400lm	SMR2G2-9273618N-WM
						45°	1900lm	1200lm	SMR2G2-9274518N-WM
					3000K	24	2000lm	1500lm	SMR2G2-9302018N-WM
						36°	2000lm	1500lm	SMR2G2-9303618N-WM
						45°	2000lm	1300lm	SMR2G2-9304518N-WM
					4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WM
						36°	2200lm	1600lm	SMR2G2-9403618N-WM
						45°	2200lm	1400lm	SMR2G2-9404518N-WM
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WM
						36°	2400lm	2000lm	SMR2G2-9273525N-WM
						45°	2400lm	1800lm	SMR2G2-9274525N-WM
					3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WM
						36°	2600lm	2100lm	SMR2G2-9303625N-WM
						45°	2600lm	1900lm	SMR2G2-9304525N-WM
					4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WM
						36°	2800lm	2300lm	SMR2G2-9403625N-WM
						45°	2800lm	2050lm	SMR2G2-9404525N-WM
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WB
						36°	1900lm	1400lm	SMR2G2-9273618N-WB
						45°	1900lm	1200lm	SMR2G2-9274518N-WB
					3000K	24	2000lm	1500lm	SMR2G2-9302018N-WB
						36°	2000lm	1500lm	SMR2G2-9303618N-WB
						45°	2000lm	1300lm	SMR2G2-9304518N-WB
					4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WB
						36°	2200lm	1600lm	SMR2G2-9403618N-WB
						45°	2200lm	1400lm	SMR2G2-9404518N-WB
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WB
						36°	2400lm	2000lm	SMR2G2-9273525N-WB
						45°	2400lm	1800lm	SMR2G2-9274525N-WB
					3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WB
						36°	2600lm	2100lm	SMR2G2-9303625N-WB
						45°	2600lm	1900lm	SMR2G2-9304525N-WB
					4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WB
						36°	2800lm	2300lm	SMR2G2-9403625N-WB
						45°	2800lm	2050lm	SMR2G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	189,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

Dark Light Reflector

18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WC
						36°	1900lm	1400lm	SMR2G2-9273618N-WC
						45°	1900lm	1200lm	SMR2G2-9274518N-WC
					3000K	24	2000lm	1500lm	SMR2G2-9302018N-WC
						36°	2000lm	1500lm	SMR2G2-9303618N-WC
						45°	2000lm	1300lm	SMR2G2-9304518N-WC
					4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WC
						36°	2200lm	1600lm	SMR2G2-9403618N-WC
						45°	2200lm	1400lm	SMR2G2-9404518N-WC
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WC
						36°	2400lm	2000lm	SMR2G2-9273525N-WC
						45°	2400lm	1800lm	SMR2G2-9274525N-WC
					3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WC
						36°	2600lm	2100lm	SMR2G2-9303625N-WC
						45°	2600lm	1900lm	SMR2G2-9304525N-WC
					4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WC
						36°	2800lm	2300lm	SMR2G2-9403625N-WC
						45°	2800lm	2050lm	SMR2G2-9404525N-WC

White Reflector

18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMR2G2-9272018N-WW
						36°	1900lm	1500lm	SMR2G2-9273618N-WW
						45°	1900lm	1300lm	SMR2G2-9274518N-WW
					3000K	24	2000lm	1600lm	SMR2G2-9302018N-WW
						36°	2000lm	1600lm	SMR2G2-9303618N-WW
						45°	2000lm	1400lm	SMR2G2-9304518N-WW
					4000K	24°	2200lm	1700lm	SMR2G2-9402018N-WW
						36°	2200lm	1700lm	SMR2G2-9403618N-WW
						45°	2200lm	1500lm	SMR2G2-9404518N-WW
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMR2G2-9272025N-WW
						36°	2400lm	2100lm	SMR2G2-9273525N-WW
						45°	2400lm	1900lm	SMR2G2-9274525N-WW
					3000K	24°	2600lm	2200lm	SMR2G2-9302025N-WW
						36°	2600lm	2200lm	SMR2G2-9303625N-WW
						45°	2600lm	2000lm	SMR2G2-9304525N-WW
					4000K	24°	2800lm	2400lm	SMR2G2-9402025N-WW
						36°	2800lm	2400lm	SMR2G2-9403625N-WW
						45°	2800lm	2200lm	SMR2G2-9404525N-WW

Gold Reflector

18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMR2G2-9272018N-WG
						36°	1900lm	1500lm	SMR2G2-9273618N-WG
						45°	1900lm	1300lm	SMR2G2-9274518N-WG
					3000K	24	2000lm	1600lm	SMR2G2-9302018N-WG
						36°	2000lm	1600lm	SMR2G2-9303618N-WG
						45°	2000lm	1400lm	SMR2G2-9304518N-WG
					4000K	24°	2200lm	1700lm	SMR2G2-9402018N-WG
						36°	2200lm	1700lm	SMR2G2-9403618N-WG
						45°	2200lm	1500lm	SMR2G2-9404518N-WG
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMR2G2-9272025N-WG
						36°	2400lm	2100lm	SMR2G2-9273525N-WG
						45°	2400lm	1900lm	SMR2G2-9274525N-WG
					3000K	24°	2600lm	2200lm	SMR2G2-9302025N-WG
						36°	2600lm	2200lm	SMR2G2-9303625N-WG
						45°	2600lm	2000lm	SMR2G2-9304525N-WG
					4000K	24°	2800lm	2400lm	SMR2G2-9402025N-WG
						36°	2800lm	2400lm	SMR2G2-9403625N-WG
						45°	2800lm	2200lm	SMR2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Honeycomb

Code for SMR2G2-9404525N-WM with Honeycomb
SMR2G2-9404525N-WM-H

Honeycomb: +9,00€

ohne / none	189,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

Trimless Version available



Trimless code for SMR2G2-9304525N-WM → SMR5G2-9304525N-WM

Trimless: +10,00€



NEKO / SENSE 125 / S125S2-G2

Fixed LED Downlight

18W 25W | CRI90 | 2700K 3000K 4000K | 24° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

122x122 | 1-25mm Ceiling Thickness | 159 | 134x134

Specular Reflector

Matt Reflector

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018N-WS
						36°	1900lm	1400lm	SMS2G2-9273618N-WS
						45°	1900lm	1200lm	SMS2G2-9274518N-WS
					3000K	24	2000lm	1500lm	SMS2G2-9302018N-WS
						36°	2000lm	1500lm	SMS2G2-9303618N-WS
						45°	2000lm	1300lm	SMS2G2-9304518N-WS
					4000K	24°	2200lm	1600lm	SMS2G2-9402018N-WS
						36°	2200lm	1600lm	SMS2G2-9403618N-WS
						45°	2200lm	1400lm	SMS2G2-9404518N-WS
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025N-WS
						36°	2400lm	2000lm	SMS2G2-9273525N-WS
						45°	2400lm	1800lm	SMS2G2-9274525N-WS
					3000K	24°	2600lm	2100lm	SMS2G2-9302025N-WS
						36°	2600lm	2100lm	SMS2G2-9303625N-WS
						45°	2600lm	1900lm	SMS2G2-9304525N-WS
					4000K	24°	2800lm	2300lm	SMS2G2-9402025N-WS
						36°	2800lm	2300lm	SMS2G2-9403625N-WS
						45°	2800lm	2050lm	SMS2G2-9404525N-WS
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018N-WM
						36°	1900lm	1400lm	SMS2G2-9273618N-WM
						45°	1900lm	1200lm	SMS2G2-9274518N-WM
					3000K	24	2000lm	1500lm	SMS2G2-9302018N-WM
						36°	2000lm	1500lm	SMS2G2-9303618N-WM
						45°	2000lm	1300lm	SMS2G2-9304518N-WM
					4000K	24°	2200lm	1600lm	SMS2G2-9402018N-WM
						36°	2200lm	1600lm	SMS2G2-9403618N-WM
						45°	2200lm	1400lm	SMS2G2-9404518N-WM
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025N-WM
						36°	2400lm	2000lm	SMS2G2-9273525N-WM
						45°	2400lm	1800lm	SMS2G2-9274525N-WM
					3000K	24°	2600lm	2100lm	SMS2G2-9302025N-WM
						36°	2600lm	2100lm	SMS2G2-9303625N-WM
						45°	2600lm	1900lm	SMS2G2-9304525N-WM
					4000K	24°	2800lm	2300lm	SMS2G2-9402025N-WM
						36°	2800lm	2300lm	SMS2G2-9403625N-WM
						45°	2800lm	2050lm	SMS2G2-9404525N-WM
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018N-WB
						36°	1900lm	1400lm	SMS2G2-9273618N-WB
						45°	1900lm	1200lm	SMS2G2-9274518N-WB
					3000K	24	2000lm	1500lm	SMS2G2-9302018N-WB
						36°	2000lm	1500lm	SMS2G2-9303618N-WB
						45°	2000lm	1300lm	SMS2G2-9304518N-WB
					4000K	24°	2200lm	1600lm	SMS2G2-9402018N-WB
						36°	2200lm	1600lm	SMS2G2-9403618N-WB
						45°	2200lm	1400lm	SMS2G2-9404518N-WB
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025N-WB
						36°	2400lm	2000lm	SMS2G2-9273525N-WB
						45°	2400lm	1800lm	SMS2G2-9274525N-WB
					3000K	24°	2600lm	2100lm	SMS2G2-9302025N-WB
						36°	2600lm	2100lm	SMS2G2-9303625N-WB
						45°	2600lm	1900lm	SMS2G2-9304525N-WB
					4000K	24°	2800lm	2300lm	SMS2G2-9402025N-WB
						36°	2800lm	2300lm	SMS2G2-9403625N-WB
						45°	2800lm	2050lm	SMS2G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	189,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

Dark Light Reflector

18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018N-WC
						36°	1900lm	1400lm	SMS2G2-9273618N-WC
						45°	1900lm	1200lm	SMS2G2-9274518N-WC
					3000K	24	2000lm	1500lm	SMS2G2-9302018N-WC
						36°	2000lm	1500lm	SMS2G2-9303618N-WC
						45°	2000lm	1300lm	SMS2G2-9304518N-WC
					4000K	24°	2200lm	1600lm	SMS2G2-9402018N-WC
						36°	2200lm	1600lm	SMS2G2-9403618N-WC
						45°	2200lm	1400lm	SMS2G2-9404518N-WC
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025N-WC
						36°	2400lm	2000lm	SMS2G2-9273525N-WC
						45°	2400lm	1800lm	SMS2G2-9274525N-WC
					3000K	24°	2600lm	2100lm	SMS2G2-9302025N-WC
						36°	2600lm	2100lm	SMS2G2-9303625N-WC
						45°	2600lm	1900lm	SMS2G2-9304525N-WC
					4000K	24°	2800lm	2300lm	SMS2G2-9402025N-WC
						36°	2800lm	2300lm	SMS2G2-9403625N-WC
						45°	2800lm	2050lm	SMS2G2-9404525N-WC

White Reflector

18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMS2G2-9272018N-WW
						36°	1900lm	1500lm	SMS2G2-9273618N-WW
						45°	1900lm	1300lm	SMS2G2-9274518N-WW
					3000K	24	2000lm	1600lm	SMS2G2-9302018N-WW
						36°	2000lm	1600lm	SMS2G2-9303618N-WW
						45°	2000lm	1400lm	SMS2G2-9304518N-WW
					4000K	24°	2200lm	1700lm	SMS2G2-9402018N-WW
						36°	2200lm	1700lm	SMS2G2-9403618N-WW
						45°	2200lm	1500lm	SMS2G2-9404518N-WW
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMS2G2-9272025N-WW
						36°	2400lm	2100lm	SMS2G2-9273525N-WW
						45°	2400lm	1900lm	SMS2G2-9274525N-WW
					3000K	24°	2600lm	2200lm	SMS2G2-9302025N-WW
						36°	2600lm	2200lm	SMS2G2-9303625N-WW
						45°	2600lm	2000lm	SMS2G2-9304525N-WW
					4000K	24°	2800lm	2400lm	SMS2G2-9402025N-WW
						36°	2800lm	2400lm	SMS2G2-9403625N-WW
						45°	2800lm	2200lm	SMS2G2-9404525N-WW

Gold Reflector

18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMS2G2-9272018N-WG
						36°	1900lm	1500lm	SMS2G2-9273618N-WG
						45°	1900lm	1300lm	SMS2G2-9274518N-WG
					3000K	24	2000lm	1600lm	SMS2G2-9302018N-WG
						36°	2000lm	1600lm	SMS2G2-9303618N-WG
						45°	2000lm	1400lm	SMS2G2-9304518N-WG
					4000K	24°	2200lm	1700lm	SMS2G2-9402018N-WG
						36°	2200lm	1700lm	SMS2G2-9403618N-WG
						45°	2200lm	1500lm	SMS2G2-9404518N-WG
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMS2G2-9272025N-WG
						36°	2400lm	2100lm	SMS2G2-9273525N-WG
						45°	2400lm	1900lm	SMS2G2-9274525N-WG
					3000K	24°	2600lm	2200lm	SMS2G2-9302025N-WG
						36°	2600lm	2200lm	SMS2G2-9303625N-WG
						45°	2600lm	2000lm	SMS2G2-9304525N-WG
					4000K	24°	2800lm	2400lm	SMS2G2-9402025N-WG
						36°	2800lm	2400lm	SMS2G2-9403625N-WG
						45°	2800lm	2200lm	SMS2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Honeycomb

Code for SMS2G2-9404525N-WM with **H**oneycomb
SMS2G2-9404525N-WM-**H**

Honeycomb: +9,00€

ohne / none	189,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

Trimless Version available



Trimless code for SMS2G2-9304525N-WM → SMS**5**G2-9304525N-WM

Trimless: +10,00€



NEKO / SENSE 125 / S125R3-G2
Wall Washer LED Downlight

18W 25W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP 54 | 5 YEARS GUARANTEE | CB CE | Intertek

125 | 1-30mm Ceiling Thickness



Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SMR3G2-927WW18N-WM
						3000K	Wall Washer	2000lm	900lm	SMR3G2-930WW18N-WM
						4000K	Wall Washer	2200lm	1000lm	SMR3G2-940WW18N-WM
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1100lm	SMR3G2-927WW25N-WM
						3000K	Wall Washer	2600lm	1200lm	SMR3G2-930WW25N-WM
						4000K	Wall Washer	2800lm	1300lm	SMR3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SMR3G2-930WW18N-WM → SMR6G2-930WW18N-WM

Trimless: +10,00€

132



ohne / none	219,00 €
ON-OFF	229,00 €
Phase Dim	239,00 €
DALI Dim	259,00 €

NEKO / SENSE 125 / S125S3-G2
Wall Washer LED Downlight

18W 25W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP 54 | 5 YEARS GUARANTEE | CB CE | Intertek

122x122 | 1-30mm Ceiling Thickness



Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18	W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SMS3G2-927WW18N-WM
						3000K	Wall Washer	2000lm	900lm	SMS3G2-930WW18N-WM
						4000K	Wall Washer	2200lm	1000lm	SMS3G2-940WW18N-WM
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1100lm	SMS3G2-927WW25N-WM
						3000K	Wall Washer	2600lm	1200lm	SMS3G2-930WW25N-WM
						4000K	Wall Washer	2800lm	1300lm	SMS3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SMS3G2-930WW18N-WM → SMS6G2-930WW18N-WM

Trimless: +10,00€

122x122



ohne / none	219,00 €
ON-OFF	229,00 €
Phase Dim	239,00 €
DALI Dim	259,00 €

NEKO / SENSE 150 / S150R1-G2

Adjustable LED Downlight

25W 38W | CRI90 | 2700K 3000K 4000K | 18° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

150 | 1-25mm Ceiling Thickness



Specular Reflector

Matt Reflector

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WS
						36°	2500lm	2300lm	SLR1G2-9273625N-WS
						50°	2500lm	1800lm	SLR1G2-9275025N-WS
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WS
						36°	2700lm	2400lm	SLR1G2-9303625N-WS
						50°	2700lm	1900lm	SLR1G2-9305025N-WS
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WS
						36°	2900lm	2600lm	SLR1G2-9403625N-WS
						50°	2900lm	2100lm	SLR1G2-9405025N-WS
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WS
						36°	3500lm	3400lm	SLR1G2-9273638N-WS
						50°	3500lm	2650lm	SLR1G2-9275038N-WS
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WS
						36°	3700lm	3600lm	SLR1G2-9303638N-WS
						50°	3700lm	2800lm	SLR1G2-9305038N-WS
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WS
						36°	4000lm	3900lm	SLR1G2-9403638N-WS
						50°	4000lm	3000lm	SLR1G2-9405038N-WS
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WM
						36°	2500lm	2300lm	SLR1G2-9273625N-WM
						50°	2500lm	1800lm	SLR1G2-9275025N-WM
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WM
						36°	2700lm	2400lm	SLR1G2-9303625N-WM
						50°	2700lm	1900lm	SLR1G2-9305025N-WM
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WM
						36°	2900lm	2600lm	SLR1G2-9403625N-WM
						50°	2900lm	2100lm	SLR1G2-9405025N-WM
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WM
						36°	3500lm	3400lm	SLR1G2-9273638N-WM
						50°	3500lm	2650lm	SLR1G2-9275038N-WM
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WM
						36°	3700lm	3600lm	SLR1G2-9303638N-WM
						50°	3700lm	2800lm	SLR1G2-9305038N-WM
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WM
						36°	4000lm	3900lm	SLR1G2-9403638N-WM
						50°	4000lm	3000lm	SLR1G2-9405038N-WM
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WB
						36°	2500lm	2300lm	SLR1G2-9273625N-WB
						50°	2500lm	1800lm	SLR1G2-9275025N-WB
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WB
						36°	2700lm	2400lm	SLR1G2-9303625N-WB
						50°	2700lm	1900lm	SLR1G2-9305025N-WB
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WB
						36°	2900lm	2600lm	SLR1G2-9403625N-WB
						50°	2900lm	2100lm	SLR1G2-9405025N-WB
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WB
						36°	3500lm	3400lm	SLR1G2-9273638N-WB
						50°	3500lm	2650lm	SLR1G2-9275038N-WB
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WB
						36°	3700lm	3600lm	SLR1G2-9303638N-WB
						50°	3700lm	2800lm	SLR1G2-9305038N-WB
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WB
						36°	4000lm	3900lm	SLR1G2-9403638N-WB
						50°	4000lm	3000lm	SLR1G2-9405038N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI Dim	299,00 €

Dark Light Reflector

25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WC
						36°	2500lm	2300lm	SLR1G2-9273625N-WC
						50°	2500lm	1800lm	SLR1G2-9275025N-WC
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WC
						36°	2700lm	2400lm	SLR1G2-9303625N-WC
						50°	2700lm	1900lm	SLR1G2-9305025N-WC
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WC
						36°	2900lm	2600lm	SLR1G2-9403625N-WC
						50°	2900lm	2100lm	SLR1G2-9405025N-WC
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WC
						36°	3500lm	3400lm	SLR1G2-9273638N-WC
						50°	3500lm	2650lm	SLR1G2-9275038N-WC
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WC
						36°	3700lm	3600lm	SLR1G2-9303638N-WC
						50°	3700lm	2800lm	SLR1G2-9305038N-WC
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WC
						36°	4000lm	3900lm	SLR1G2-9403638N-WC
						50°	4000lm	3000lm	SLR1G2-9405038N-WC

White Reflector

25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WW
						36°	2500lm	2300lm	SLR1G2-9273625N-WW
						50°	2500lm	1800lm	SLR1G2-9275025N-WW
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WW
						36°	2700lm	2400lm	SLR1G2-9303625N-WW
						50°	2700lm	1900lm	SLR1G2-9305025N-WW
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WW
						36°	2900lm	2600lm	SLR1G2-9403625N-WW
						50°	2900lm	2100lm	SLR1G2-9405025N-WW
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WW
						36°	3500lm	3400lm	SLR1G2-9273638N-WW
						50°	3500lm	2650lm	SLR1G2-9275038N-WW
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WW
						36°	3700lm	3600lm	SLR1G2-9303638N-WW
						50°	3700lm	2800lm	SLR1G2-9305038N-WW
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WW
						36°	4000lm	3900lm	SLR1G2-9403638N-WW
						50°	4000lm	3000lm	SLR1G2-9405038N-WW

Gold Reflector

25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WG
						36°	2500lm	2300lm	SLR1G2-9273625N-WG
						50°	2500lm	1800lm	SLR1G2-9275025N-WG
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WG
						36°	2700lm	2400lm	SLR1G2-9303625N-WG
						50°	2700lm	1900lm	SLR1G2-9305025N-WG
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WG
						36°	2900lm	2600lm	SLR1G2-9403625N-WG
						50°	2900lm	2100lm	SLR1G2-9405025N-WG
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WG
						36°	3500lm	3400lm	SLR1G2-9273638N-WG
						50°	3500lm	2650lm	SLR1G2-9275038N-WG
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WG
						36°	3700lm	3600lm	SLR1G2-9303638N-WG
						50°	3700lm	2800lm	SLR1G2-9305038N-WG
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WG
						36°	4000lm	3900lm	SLR1G2-9403638N-WG
						50°	4000lm	3000lm	SLR1G2-9405038N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Honeycomb

Code for SLR1G2-9405025N-WM with **H**oneycomb
SLR1G2-9405025N-WM-**H**

Honeycomb: +9,00€

ohne / none	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI Dim	299,00 €

Trimless Version available



Trimless code for SLR1G2-9305025N-WM → SLR4G2-9305025N-WM

Trimless: +10,00€



NEKO / SENSE 150 / S150S1-G2

Adjustable LED Downlight

25W 38W | CRI90 | 2700K 3000K 4000K | 18° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

147x147 | 1-35mm Ceiling Thickness | 190 | 159x159

Specular Reflector

Matt Reflector

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WS
						36°	2500lm	2300lm	SLS1G2-9273625N-WS
						50°	2500lm	1800lm	SLS1G2-9275025N-WS
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WS
						36°	2700lm	2400lm	SLS1G2-9303625N-WS
						50°	2700lm	1900lm	SLS1G2-9305025N-WS
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WS
						36°	2900lm	2600lm	SLS1G2-9403625N-WS
						50°	2900lm	2100lm	SLS1G2-9405025N-WS
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WS
						36°	3500lm	3400lm	SLS1G2-9273638N-WS
						50°	3500lm	2650lm	SLS1G2-9275038N-WS
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WS
						36°	3700lm	3600lm	SLS1G2-9303638N-WS
						50°	3700lm	2800lm	SLS1G2-9305038N-WS
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WS
						36°	4000lm	3900lm	SLS1G2-9403638N-WS
						50°	4000lm	3000lm	SLS1G2-9405038N-WS
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WM
						36°	2500lm	2300lm	SLS1G2-9273625N-WM
						50°	2500lm	1800lm	SLS1G2-9275025N-WM
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WM
						36°	2700lm	2400lm	SLS1G2-9303625N-WM
						50°	2700lm	1900lm	SLS1G2-9305025N-WM
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WM
						36°	2900lm	2600lm	SLS1G2-9403625N-WM
						50°	2900lm	2100lm	SLS1G2-9405025N-WM
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WM
						36°	3500lm	3400lm	SLS1G2-9273638N-WM
						50°	3500lm	2650lm	SLS1G2-9275038N-WM
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WM
						36°	3700lm	3600lm	SLS1G2-9303638N-WM
						50°	3700lm	2800lm	SLS1G2-9305038N-WM
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WM
						36°	4000lm	3900lm	SLS1G2-9403638N-WM
						50°	4000lm	3000lm	SLS1G2-9405038N-WM
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WB
						36°	2500lm	2300lm	SLS1G2-9273625N-WB
						50°	2500lm	1800lm	SLS1G2-9275025N-WB
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WB
						36°	2700lm	2400lm	SLS1G2-9303625N-WB
						50°	2700lm	1900lm	SLS1G2-9305025N-WB
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WB
						36°	2900lm	2600lm	SLS1G2-9403625N-WB
						50°	2900lm	2100lm	SLS1G2-9405025N-WB
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WB
						36°	3500lm	3400lm	SLS1G2-9273638N-WB
						50°	3500lm	2650lm	SLS1G2-9275038N-WB
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WB
						36°	3700lm	3600lm	SLS1G2-9303638N-WB
						50°	3700lm	2800lm	SLS1G2-9305038N-WB
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WB
						36°	4000lm	3900lm	SLS1G2-9403638N-WB
						50°	4000lm	3000lm	SLS1G2-9405038N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI Dim	299,00 €

Dark Light Reflector

25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WC
						36°	2500lm	2300lm	SLS1G2-9273625N-WC
						50°	2500lm	1800lm	SLS1G2-9275025N-WC
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WC
						36°	2700lm	2400lm	SLS1G2-9303625N-WC
						50°	2700lm	1900lm	SLS1G2-9305025N-WC
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WC
						36°	2900lm	2600lm	SLS1G2-9403625N-WC
						50°	2900lm	2100lm	SLS1G2-9405025N-WC
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WC
						36°	3500lm	3400lm	SLS1G2-9273638N-WC
						50°	3500lm	2650lm	SLS1G2-9275038N-WC
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WC
						36°	3700lm	3600lm	SLS1G2-9303638N-WC
						50°	3700lm	2800lm	SLS1G2-9305038N-WC
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WC
						36°	4000lm	3900lm	SLS1G2-9403638N-WC
						50°	4000lm	3000lm	SLS1G2-9405038N-WC

White Reflector

25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WW
						36°	2500lm	2300lm	SLS1G2-9273625N-WW
						50°	2500lm	1800lm	SLS1G2-9275025N-WW
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WW
						36°	2700lm	2400lm	SLS1G2-9303625N-WW
						50°	2700lm	1900lm	SLS1G2-9305025N-WW
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WW
						36°	2900lm	2600lm	SLS1G2-9403625N-WW
						50°	2900lm	2100lm	SLS1G2-9405025N-WW
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WW
						36°	3500lm	3400lm	SLS1G2-9273638N-WW
						50°	3500lm	2650lm	SLS1G2-9275038N-WW
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WW
						36°	3700lm	3600lm	SLS1G2-9303638N-WW
						50°	3700lm	2800lm	SLS1G2-9305038N-WW
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WW
						36°	4000lm	3900lm	SLS1G2-9403638N-WW
						50°	4000lm	3000lm	SLS1G2-9405038N-WW

Gold Reflector

25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-WG
						36°	2500lm	2300lm	SLS1G2-9273625N-WG
						50°	2500lm	1800lm	SLS1G2-9275025N-WG
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-WG
						36°	2700lm	2400lm	SLS1G2-9303625N-WG
						50°	2700lm	1900lm	SLS1G2-9305025N-WG
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-WG
						36°	2900lm	2600lm	SLS1G2-9403625N-WG
						50°	2900lm	2100lm	SLS1G2-9405025N-WG
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-WG
						36°	3500lm	3400lm	SLS1G2-9273638N-WG
						50°	3500lm	2650lm	SLS1G2-9275038N-WG
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-WG
						36°	3700lm	3600lm	SLS1G2-9303638N-WG
						50°	3700lm	2800lm	SLS1G2-9305038N-WG
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-WG
						36°	4000lm	3900lm	SLS1G2-9403638N-WG
						50°	4000lm	3000lm	SLS1G2-9405038N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Honeycomb

Code for SLS1G2-9405025N-WM with **H**oneycomb
SLS1G2-9405025N-WM-**H**

Honeycomb: +9,00€

ohne / none	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI Dim	299,00 €



Trimless code for SLS1G2-9305025N-WM → SLS**4**G2-9305025N-WM

Trimless: +10,00€



NEKO / SENSE 150 / S150R2-G2

Fixed LED Downlight

25W 38W | CRI90 | 2700K 3000K 4000K | 24° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek



Specular Reflector

Matt Reflector

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WS
						36°	2500lm	2100lm	SLR2G2-9273625N-WS
						45°	2500lm	1700lm	SLR2G2-9274525N-WS
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WS
						36°	2700lm	2200lm	SLR2G2-9303625N-WS
						45°	2700lm	1800lm	SLR2G2-9304525N-WS
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WS
						36°	2900lm	2400lm	SLR2G2-9403625N-WS
						45°	2900lm	1900lm	SLR2G2-9404525N-WS
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WS
						36°	3500lm	3100lm	SLR2G2-9273638N-WS
						45°	3500lm	2500lm	SLR2G2-9274538N-WS
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WS
						36°	3700lm	3300lm	SLR2G2-9303638N-WS
						45°	3700lm	2600lm	SLR2G2-9304538N-WS
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WS
						36°	4000lm	3600lm	SLR2G2-9403638N-WS
						45°	4000lm	2800lm	SLR2G2-9404538N-WS
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WM
						36°	2500lm	2100lm	SLR2G2-9273625N-WM
						45°	2500lm	1700lm	SLR2G2-9274525N-WM
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WM
						36°	2700lm	2200lm	SLR2G2-9303625N-WM
						45°	2700lm	1800lm	SLR2G2-9304525N-WM
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WM
						36°	2900lm	2400lm	SLR2G2-9403625N-WM
						45°	2900lm	1900lm	SLR2G2-9404525N-WM
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WM
						36°	3500lm	3100lm	SLR2G2-9273638N-WM
						45°	3500lm	2500lm	SLR2G2-9274538N-WM
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WM
						36°	3700lm	3300lm	SLR2G2-9303638N-WM
						45°	3700lm	2600lm	SLR2G2-9304538N-WM
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WM
						36°	4000lm	3600lm	SLR2G2-9403638N-WM
						45°	4000lm	2800lm	SLR2G2-9404538N-WM
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WB
						36°	2500lm	2100lm	SLR2G2-9273625N-WB
						45°	2500lm	1700lm	SLR2G2-9274525N-WB
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WB
						36°	2700lm	2200lm	SLR2G2-9303625N-WB
						45°	2700lm	1800lm	SLR2G2-9304525N-WB
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WB
						36°	2900lm	2400lm	SLR2G2-9403625N-WB
						45°	2900lm	1900lm	SLR2G2-9404525N-WB
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WB
						36°	3500lm	3100lm	SLR2G2-9273638N-WB
						45°	3500lm	2500lm	SLR2G2-9274538N-WB
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WB
						36°	3700lm	3300lm	SLR2G2-9303638N-WB
						45°	3700lm	2600lm	SLR2G2-9304538N-WB
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WB
						36°	4000lm	3600lm	SLR2G2-9403638N-WB
						45°	4000lm	2800lm	SLR2G2-9404538N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI Dim	299,00 €

Dark Light Reflector

25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WC
						36°	2500lm	2100lm	SLR2G2-9273625N-WC
						45°	2500lm	1700lm	SLR2G2-9274525N-WC
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WC
						36°	2700lm	2200lm	SLR2G2-9303625N-WC
						45°	2700lm	1800lm	SLR2G2-9304525N-WC
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WC
						36°	2900lm	2400lm	SLR2G2-9403625N-WC
						45°	2900lm	1900lm	SLR2G2-9404525N-WC
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WC
						36°	3500lm	3100lm	SLR2G2-9273638N-WC
						45°	3500lm	2500lm	SLR2G2-9274538N-WC
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WC
						36°	3700lm	3300lm	SLR2G2-9303638N-WC
						45°	3700lm	2600lm	SLR2G2-9304538N-WC
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WC
						36°	4000lm	3600lm	SLR2G2-9403638N-WC
						45°	4000lm	2800lm	SLR2G2-9404538N-WC

White Reflector

25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WW
						36°	2500lm	2100lm	SLR2G2-9273625N-WW
						45°	2500lm	1700lm	SLR2G2-9274525N-WW
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WW
						36°	2700lm	2200lm	SLR2G2-9303625N-WW
						45°	2700lm	1800lm	SLR2G2-9304525N-WW
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WW
						36°	2900lm	2400lm	SLR2G2-9403625N-WW
						45°	2900lm	1900lm	SLR2G2-9404525N-WW
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WW
						36°	3500lm	3100lm	SLR2G2-9273638N-WW
						45°	3500lm	2500lm	SLR2G2-9274538N-WW
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WW
						36°	3700lm	3300lm	SLR2G2-9303638N-WW
						45°	3700lm	2600lm	SLR2G2-9304538N-WW
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WW
						36°	4000lm	3600lm	SLR2G2-9403638N-WW
						45°	4000lm	2800lm	SLR2G2-9404538N-WW

Gold Reflector

25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WG
						36°	2500lm	2100lm	SLR2G2-9273625N-WG
						45°	2500lm	1700lm	SLR2G2-9274525N-WG
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WG
						36°	2700lm	2200lm	SLR2G2-9303625N-WG
						45°	2700lm	1800lm	SLR2G2-9304525N-WG
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WG
						36°	2900lm	2400lm	SLR2G2-9403625N-WG
						45°	2900lm	1900lm	SLR2G2-9404525N-WG
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WG
						36°	3500lm	3100lm	SLR2G2-9273638N-WG
						45°	3500lm	2500lm	SLR2G2-9274538N-WG
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WG
						36°	3700lm	3300lm	SLR2G2-9303638N-WG
						45°	3700lm	2600lm	SLR2G2-9304538N-WG
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WG
						36°	4000lm	3600lm	SLR2G2-9403638N-WG
						45°	4000lm	2800lm	SLR2G2-9404538N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Honeycomb

Code for SLR2G2-9404525N-WM with **H**oneycomb
SLR2G2-9404525N-WM-**H**

Honeycomb: +9,00€

ohne / none	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI Dim	299,00 €

Trimless Version available



Trimless code for SLR2G2-9304525N-WM → SLR**5**G2-9304525N-WM

Trimless: +10,00€



NEKO / SENSE 150 / S150S2-G2

Fixed LED Downlight

25W 38W | CRI90 | 2700K 3000K 4000K | 24° 36° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

147x147 | 1-35mm Ceiling Thickness



Specular Reflector

Matt Reflector

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WS
						36°	2500lm	2100lm	SLS2G2-9273625N-WS
						45°	2500lm	1700lm	SLS2G2-9274525N-WS
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WS
						36°	2700lm	2200lm	SLS2G2-9303625N-WS
						45°	2700lm	1800lm	SLS2G2-9304525N-WS
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WS
						36°	2900lm	2400lm	SLS2G2-9403625N-WS
						45°	2900lm	1900lm	SLS2G2-9404525N-WS
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WS
						36°	3500lm	3100lm	SLS2G2-9273638N-WS
						45°	3500lm	2500lm	SLS2G2-9274538N-WS
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WS
						36°	3700lm	3300lm	SLS2G2-9303638N-WS
						45°	3700lm	2600lm	SLS2G2-9304538N-WS
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WS
						36°	4000lm	3600lm	SLS2G2-9403638N-WS
						45°	4000lm	2800lm	SLS2G2-9404538N-WS
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WM
						36°	2500lm	2100lm	SLS2G2-9273625N-WM
						45°	2500lm	1700lm	SLS2G2-9274525N-WM
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WM
						36°	2700lm	2200lm	SLS2G2-9303625N-WM
						45°	2700lm	1800lm	SLS2G2-9304525N-WM
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WM
						36°	2900lm	2400lm	SLS2G2-9403625N-WM
						45°	2900lm	1900lm	SLS2G2-9404525N-WM
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WM
						36°	3500lm	3100lm	SLS2G2-9273638N-WM
						45°	3500lm	2500lm	SLS2G2-9274538N-WM
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WM
						36°	3700lm	3300lm	SLS2G2-9303638N-WM
						45°	3700lm	2600lm	SLS2G2-9304538N-WM
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WM
						36°	4000lm	3600lm	SLS2G2-9403638N-WM
						45°	4000lm	2800lm	SLS2G2-9404538N-WM
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WB
						36°	2500lm	2100lm	SLS2G2-9273625N-WB
						45°	2500lm	1700lm	SLS2G2-9274525N-WB
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WB
						36°	2700lm	2200lm	SLS2G2-9303625N-WB
						45°	2700lm	1800lm	SLS2G2-9304525N-WB
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WB
						36°	2900lm	2400lm	SLS2G2-9403625N-WB
						45°	2900lm	1900lm	SLS2G2-9404525N-WB
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WB
						36°	3500lm	3100lm	SLS2G2-9273638N-WB
						45°	3500lm	2500lm	SLS2G2-9274538N-WB
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WB
						36°	3700lm	3300lm	SLS2G2-9303638N-WB
						45°	3700lm	2600lm	SLS2G2-9304538N-WB
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WB
						36°	4000lm	3600lm	SLS2G2-9403638N-WB
						45°	4000lm	2800lm	SLS2G2-9404538N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI Dim	299,00 €

Dark Light Reflector

25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WC
						36°	2500lm	2100lm	SLS2G2-9273625N-WC
						45°	2500lm	1700lm	SLS2G2-9274525N-WC
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WC
						36°	2700lm	2200lm	SLS2G2-9303625N-WC
						45°	2700lm	1800lm	SLS2G2-9304525N-WC
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WC
						36°	2900lm	2400lm	SLS2G2-9403625N-WC
						45°	2900lm	1900lm	SLS2G2-9404525N-WC
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WC
						36°	3500lm	3100lm	SLS2G2-9273638N-WC
						45°	3500lm	2500lm	SLS2G2-9274538N-WC
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WC
						36°	3700lm	3300lm	SLS2G2-9303638N-WC
						45°	3700lm	2600lm	SLS2G2-9304538N-WC
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WC
						36°	4000lm	3600lm	SLS2G2-9403638N-WC
						45°	4000lm	2800lm	SLS2G2-9404538N-WC

White Reflector

25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WW
						36°	2500lm	2100lm	SLS2G2-9273625N-WW
						45°	2500lm	1700lm	SLS2G2-9274525N-WW
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WW
						36°	2700lm	2200lm	SLS2G2-9303625N-WW
						45°	2700lm	1800lm	SLS2G2-9304525N-WW
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WW
						36°	2900lm	2400lm	SLS2G2-9403625N-WW
						45°	2900lm	1900lm	SLS2G2-9404525N-WW
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WW
						36°	3500lm	3100lm	SLS2G2-9273638N-WW
						45°	3500lm	2500lm	SLS2G2-9274538N-WW
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WW
						36°	3700lm	3300lm	SLS2G2-9303638N-WW
						45°	3700lm	2600lm	SLS2G2-9304538N-WW
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WW
						36°	4000lm	3600lm	SLS2G2-9403638N-WW
						45°	4000lm	2800lm	SLS2G2-9404538N-WW

Gold Reflector

25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WG
						36°	2500lm	2100lm	SLS2G2-9273625N-WG
						45°	2500lm	1700lm	SLS2G2-9274525N-WG
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WG
						36°	2700lm	2200lm	SLS2G2-9303625N-WG
						45°	2700lm	1800lm	SLS2G2-9304525N-WG
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WG
						36°	2900lm	2400lm	SLS2G2-9403625N-WG
						45°	2900lm	1900lm	SLS2G2-9404525N-WG
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WG
						36°	3500lm	3100lm	SLS2G2-9273638N-WG
						45°	3500lm	2500lm	SLS2G2-9274538N-WG
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WG
						36°	3700lm	3300lm	SLS2G2-9303638N-WG
						45°	3700lm	2600lm	SLS2G2-9304538N-WG
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WG
						36°	4000lm	3600lm	SLS2G2-9403638N-WG
						45°	4000lm	2800lm	SLS2G2-9404538N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Honeycomb

Code for SLS2G2-9404525N-WM with Honeycomb
SLS2G2-9404525N-WM-H

Honeycomb: +9,00€

ohne / none	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI Dim	299,00 €

Trimless Version available



Trimless code for SLS2G2-9304525N-WM → SLS5G2-9304525N-WM

Trimless: +10,00€



NEKO / SENSE 150 / S150R3-G2
Wall Washer LED Downlight

25W 38W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP 54 | 5 YEARS GUARANTEE | CB CE | Intertek



Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2500lm	1100lm	SLR3G2-927WW25N-WM
						3000K	Wall Washer	2700lm	1200lm	SLR3G2-930WW25N-WM
						4000K	Wall Washer	2900lm	1300lm	SLR3G2-940WW25N-WM
38	W	42 W	36 V	1050 mA	90	2700K	Wall Washer	3500lm	1600lm	SLR3G2-927WW38N-WM
						3000K	Wall Washer	3700lm	1700lm	SLR3G2-930WW38N-WM
						4000K	Wall Washer	4000lm	1800lm	SLR3G2-940WW38N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SLR3G2-930WW25N-WM → SLR6G2-930WW25N-WM

Trimless: +10,00€



ohne / none	279,00 €
ON-OFF	299,00 €
Phase Dim	309,00 €
DALI Dim	329,00 €

NEKO / SENSE 150 / S150S3-G2
Wall Washer LED Downlight

25W 38W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | IP 54 | 5 YEARS GUARANTEE | CB CE | Intertek



Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25	W	28 W	36 V	700 mA	90	2700K	Wall Washer	2500lm	1100lm	SLS3G2-927WW25N-WM
						3000K	Wall Washer	2700lm	1200lm	SLS3G2-930WW25N-WM
						4000K	Wall Washer	2900lm	1300lm	SLS3G2-940WW25N-WM
38	W	42 W	36 V	1050 mA	90	2700K	Wall Washer	3500lm	1600lm	SLS3G2-927WW38N-WM
						3000K	Wall Washer	3700lm	1700lm	SLS3G2-930WW38N-WM
						4000K	Wall Washer	4000lm	1800lm	SLS3G2-940WW38N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SLS3G2-930WW25N-WM → SLS6G2-930WW25N-WM

Trimless: +10,00€



ohne / none	279,00 €
ON-OFF	299,00 €
Phase Dim	309,00 €
DALI Dim	329,00 €

NEKO / VISION / VF68
Fixed LED Downlight

13W 18W | CRI90 | 2700K 3000K 4000K | 18° 40° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

68 | 1-32mm Ceiling Thickness



Specular Reflector

Matt Reflector

Black Reflector

Chrome Black Reflector

White Reflector

Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WS
						40°	1400lm	1100lm	VF68-9274013N-WS
					3000K	18°	1500lm	1200lm	VF68-9301813N-WS
						40°	1500lm	1200lm	VF68-9304013N-WS
					4000K	18°	1600lm	1300lm	VF68-9401813N-WS
						40°	1600lm	1300lm	VF68-9404013N-WS
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WS
						40°	1900lm	1500lm	VF68-9274018N-WS
					3000K	18°	2000lm	1600lm	VF68-9301818N-WS
						40°	2000lm	1600lm	VF68-9304018N-WS
					4000K	18°	2200lm	1700lm	VF68-9401818N-WS
						40°	2200lm	1700lm	VF68-9404018N-WS
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WM
						40°	1400lm	1100lm	VF68-9274013N-WM
					3000K	18°	1500lm	1200lm	VF68-9301813N-WM
						40°	1500lm	1200lm	VF68-9304013N-WM
					4000K	18°	1600lm	1300lm	VF68-9401813N-WM
						40°	1600lm	1300lm	VF68-9404013N-WM
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WM
						40°	1900lm	1500lm	VF68-9274018N-WM
					3000K	18°	2000lm	1600lm	VF68-9301818N-WM
						40°	2000lm	1600lm	VF68-9304018N-WM
					4000K	18°	2200lm	1700lm	VF68-9401818N-WM
						40°	2200lm	1700lm	VF68-9404018N-WM
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WB
						40°	1400lm	1100lm	VF68-9274013N-WB
					3000K	18°	1500lm	1200lm	VF68-9301813N-WB
						40°	1500lm	1200lm	VF68-9304013N-WB
					4000K	18°	1600lm	1300lm	VF68-9401813N-WB
						40°	1600lm	1300lm	VF68-9404013N-WB
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WB
						40°	1900lm	1500lm	VF68-9274018N-WB
					3000K	18°	2000lm	1600lm	VF68-9301818N-WB
						40°	2000lm	1600lm	VF68-9304018N-WB
					4000K	18°	2200lm	1700lm	VF68-9401818N-WB
						40°	2200lm	1700lm	VF68-9404018N-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WC
						40°	1400lm	1100lm	VF68-9274013N-WC
					3000K	18°	1500lm	1200lm	VF68-9301813N-WC
						40°	1500lm	1200lm	VF68-9304013N-WC
					4000K	18°	1600lm	1300lm	VF68-9401813N-WC
						40°	1600lm	1300lm	VF68-9404013N-WC
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WC
						40°	1900lm	1500lm	VF68-9274018N-WC
					3000K	18°	2000lm	1600lm	VF68-9301818N-WC
						40°	2000lm	1600lm	VF68-9304018N-WC
					4000K	18°	2200lm	1700lm	VF68-9401818N-WC
						40°	2200lm	1700lm	VF68-9404013 8N-WC
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WW
						40°	1400lm	1100lm	VF68-9274013N-WW
					3000K	18°	1500lm	1200lm	VF68-9301813N-WW
						40°	1500lm	1200lm	VF68-9304013N-WW
					4000K	18°	1600lm	1300lm	VF68-9401813N-WW
						40°	1600lm	1300lm	VF68-9404013N-WW
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WW
						40°	1900lm	1500lm	VF68-9274018N-WW
					3000K	18°	2000lm	1600lm	VF68-9301818N-WW
						40°	2000lm	1600lm	VF68-9304018N-WW
					4000K	18°	2200lm	1700lm	VF68-9401818N-WW
						40°	2200lm	1700lm	VF68-9404018N-WW
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WG
						40°	1400lm	1100lm	VF68-9274013N-WG
					3000K	18°	1500lm	1200lm	VF68-9301813N-WG
						40°	1500lm	1200lm	VF68-9304013N-WG
					4000K	18°	1600lm	1300lm	VF68-9401813N-WG
						40°	1600lm	1300lm	VF68-9404013N-WG
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WG
						40°	1900lm	1500lm	VF68-9274018N-WG
					3000K	18°	2000lm	1600lm	VF68-9301818N-WG
						40°	2000lm	1600lm	VF68-9304018N-WG
					4000K	18°	2200lm	1700lm	VF68-9401818N-WG
						40°	2200lm	1700lm	VF68-9404018N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	89,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI Dim	159,00 €

NEKO / VISION / VW68

Wall Washer LED Downlight

13W 18W | CRI90 | 2700K 3000K 4000K | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | Intertek

68 | 1-32mm Ceiling Thickness



Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13	W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	780lm	VW68-927WW13N-WM
						3000K	Wall Washer	1500lm	820lm	VW68-930WW13N-WM
						4000K	Wall Washer	1600lm	870lm	VW68-940WW13N-WM
18	W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	1050lm	VW68-927WW18N-WM
						3000K	Wall Washer	2000lm	1100lm	VW68-930WW18N-WM
						4000K	Wall Washer	2200lm	1170lm	VW68-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	119,00 €
ON-OFF	139,00 €
Phase Dim	149,00 €
DALI Dim	189,00 €

NEKO / TAKEO / T100 Pro
Fixed LED Downlight

8.5W 12W 17W | CRI80 CRI90 | 2700K 3000K 4000K | 30° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE | Intertek

100 | 1-25mm Ceiling Thickness | 79 | Ø110

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8. 5 W	10 W	34 V	250 mA	80	2700K	30°	1300lm	1150lm	TS4-8273009N-WM
						50°	1300lm	1000lm	TS4-8275009N-WM
					3000K	30°	1400lm	1200lm	TS4-8303009N-WM
						50°	1400lm	1050lm	TS4-8305009N-WM
					4000K	30°	1500lm	1300lm	TS4-8403009N-WM
						50°	1500lm	1200lm	TS4-8405009N-WM
12 W	14 W	34 V	350 mA	80	2700K	30°	1800lm	1600lm	TS4-8273012N-WM
						50°	1800lm	1350lm	TS4-8275012N-WM
					3000K	30°	1900lm	1700lm	TS4-8303012N-WM
						50°	1900lm	1450lm	TS4-8305012N-WM
					4000K	30°	2050lm	1800lm	TS4-8403012N-WM
						50°	2050lm	1550lm	TS4-8405012N-WM
17 W	19 W	34 V	500 mA	80	2700K	30°	2300lm	2200lm	TS4-8273017N-WM
						50°	2300lm	1900lm	TS4-8275017N-WM
					3000K	30°	2500lm	2350lm	TS4-8303017N-WM
						50°	2500lm	2000lm	TS4-8305017N-WM
					4000K	30°	2700lm	2550lm	TS4-8403017N-WM
						50°	2700lm	2200lm	TS4-8405017N-WM

8. 5 W	10 W	34 V	250 mA	80	2700K	30°	1300lm	1150lm	TS4-8273009N-WW
						50°	1300lm	1000lm	TS4-8275009N-WW
					3000K	30°	1400lm	1200lm	TS4-8303009N-WW
						50°	1400lm	1050lm	TS4-8305009N-WW
					4000K	30°	1500lm	1300lm	TS4-8403009N-WW
						50°	1500lm	1200lm	TS4-8405009N-WW
12 W	14 W	34 V	350 mA	80	2700K	30°	1800lm	1600lm	TS4-8273012N-WW
						50°	1800lm	1350lm	TS4-8275012N-WW
					3000K	30°	1900lm	1700lm	TS4-8303012N-WW
						50°	1900lm	1450lm	TS4-8305012N-WW
					4000K	30°	2050lm	1800lm	TS4-8403012N-WW
						50°	2050lm	1550lm	TS4-8405012N-WW
17 W	19 W	34 V	500 mA	80	2700K	30°	2300lm	2200lm	TS4-8273017N-WW
						50°	2300lm	1900lm	TS4-8275017N-WW
					3000K	30°	2500lm	2350lm	TS4-8303017N-WW
						50°	2500lm	2000lm	TS4-8305017N-WW
					4000K	30°	2700lm	2550lm	TS4-8403017N-WW
						50°	2700lm	2200lm	TS4-8405017N-WW

8. 5 W	10 W	34 V	250 mA	80	2700K	30°	1300lm	1150lm	TS4-8273009N-WB
						50°	1300lm	1000lm	TS4-8275009N-WB
					3000K	30°	1400lm	1200lm	TS4-8303009N-WB
						50°	1400lm	1050lm	TS4-8305009N-WB
					4000K	30°	1500lm	1300lm	TS4-8403009N-WB
						50°	1500lm	1200lm	TS4-8405009N-WB
12 W	14 W	34 V	350 mA	80	2700K	30°	1800lm	1600lm	TS4-8273012N-WB
						50°	1800lm	1350lm	TS4-8275012N-WB
					3000K	30°	1900lm	1700lm	TS4-8303012N-WB
						50°	1900lm	1450lm	TS4-8305012N-WB
					4000K	30°	2050lm	1800lm	TS4-8403012N-WB
						50°	2050lm	1550lm	TS4-8405012N-WB
17 W	19 W	34 V	500 mA	80	2700K	30°	2300lm	2200lm	TS4-8273017N-WB
						50°	2300lm	1900lm	TS4-8275017N-WB
					3000K	30°	2500lm	2350lm	TS4-8303017N-WB
						50°	2500lm	2000lm	TS4-8305017N-WB
					4000K	30°	2700lm	2550lm	TS4-8403017N-WB
						50°	2700lm	2200lm	TS4-8405017N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	79,00 €
ON-OFF	99,00 €
Phase Dim	109,00 €
DALI Dim	129,00 €

NEKO / TAKEO / T150 Pro
Fixed LED Downlight

17W 25W | CRI80 CRI90 | 2700K 3000K 4000K | 30° 65° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	34 V	500 mA	80	2700K	30°	2600lm	2450lm	TM4-8273017N-WM
						65°	2600lm	2100lm	TM4-8276517N-WM
					3000K	30°	2800lm	2600lm	TM4-8303017N-WM
						65°	2800lm	2200lm	TM4-8306517N-WM
					4000K	30°	3000lm	2800lm	TM4-8403017N-WM
						65°	3000lm	2400lm	TM4-8406517N-WM
24 W	26 W	34 V	700 mA	80	2700K	30°	3400lm	3100lm	TM4-8273024N-WM
						65°	3400lm	2700lm	TM4-8276524N-WM
					3000K	30°	3600lm	3300lm	TM4-8303024N-WM
						65°	3600lm	2850lm	TM4-8306524N-WM
					4000K	30°	3900lm	3600lm	TM4-8403024N-WM
						65°	3900lm	3100lm	TM4-8406524N-WM

17 W	19 W	34 V	500 mA	80	2700K	30°	2600lm	2450lm	TM4-8273017N-WW
						65°	2600lm	2100lm	TM4-8276517N-WW
					3000K	30°	2800lm	2600lm	TM4-8303017N-WW
						65°	2800lm	2200lm	TM4-8306517N-WW
					4000K	30°	3000lm	2800lm	TM4-8403017N-WW
						65°	3000lm	2400lm	TM4-8406517N-WW
24 W	26 W	34 V	700 mA	80	2700K	30°	3400lm	3100lm	TM4-8273024N-WW
						65°	3400lm	2700lm	TM4-8276524N-WW
					3000K	30°	3600lm	3300lm	TM4-8303024N-WW
						65°	3600lm	2850lm	TM4-8306524N-WW
					4000K	30°	3900lm	3600lm	TM4-8403024N-WW
						65°	3900lm	3100lm	TM4-8406524N-WW

17 W	19 W	34 V	500 mA	80	2700K	30°	2600lm	2450lm	TM4-8273017N-WB
						65°	2600lm	2100lm	TM4-8276517N-WB
					3000K	30°	2800lm	2600lm	TM4-8303017N-WB
						65°	2800lm	2200lm	TM4-8306517N-WB
					4000K	30°	3000lm	2800lm	TM4-8403017N-WB
						65°	3000lm	2400lm	TM4-8406517N-WB
24 W	26 W	34 V	700 mA	80	2700K	30°	3400lm	3100lm	TM4-8273024N-WB
						65°	3400lm	2700lm	TM4-8276524N-WB
					3000K	30°	3600lm	3300lm	TM4-8303024N-WB
						65°	3600lm	2850lm	TM4-8306524N-WB
					4000K	30°	3900lm	3600lm	TM4-8403024N-WB
						65°	3900lm	3100lm	TM4-8406524N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	129,00 €
ON-OFF	149,00 €
Phase Dim	159,00 €
DALI Dim	169,00 €

NEKO / TAKEO / T200 Pro
Fixed LED Downlight

24W 36W 48W | CRI80 CRI90 | 2700K 3000K 4000K | 18° 30° 65° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34 V	700 mA	80	2700K	18°	3700lm	3100lm	TL4-8271824N-WM
						30°	3700lm	3300lm	TL4-8273024N-WM
						65°	3700lm	2800lm	TL4-8276524N-WM
					3000K	18°	3900lm	3300lm	TL4-8301824N-WM
						30°	3900lm	3500lm	TL4-8303024N-WM
						65°	3900lm	2950lm	TL4-8306524N-WM
					4000K	18°	4200lm	3500lm	TL4-8401824N-WM
						30°	4200lm	3800lm	TL4-8403024N-WM
						65°	4200lm	3200lm	TL4-8406524N-WM
36 W	40 W	34 V	1050 mA	80	2700K	18°	5600lm	4500lm	TL4-8271836N-WM
						30°	5600lm	4800lm	TL4-8273036N-WM
						65°	5600lm	4000lm	TL4-8276536N-WM
					3000K	18°	6000lm	4700lm	TL4-8301836N-WM
						30°	6000lm	5000lm	TL4-8303036N-WM
						65°	6000lm	4200lm	TL4-8306536N-WM
					4000K	18°	6500lm	5200lm	TL4-8401836N-WM
						30°	6500lm	5500lm	TL4-8403036N-WM
						65°	6500lm	4600lm	TL4-8406536N-WM
48 W	52 W	34 V	1400 mA	80	2700K	18°	6600lm	5600lm	TL4-8271848N-WM
						30°	6600lm	6000lm	TL4-8273048N-WM
						65°	6600lm	5000lm	TL4-8276548N-WM
					3000K	18°	6900lm	5900lm	TL4-8301848N-WM
						30°	6900lm	6300lm	TL4-8303048N-WM
						65°	6900lm	5300lm	TL4-8306548N-WM
					4000K	18°	7500lm	6500lm	TL4-8401848N-WM
						30°	7500lm	6900lm	TL4-8403048N-WM
						65°	7500lm	5800lm	TL4-8406548N-WM
24 W	26 W	34 V	700 mA	80	2700K	18°	3700lm	3100lm	TL4-8271824N-WW
						30°	3700lm	3300lm	TL4-8273024N-WW
						65°	3700lm	2800lm	TL4-8276524N-WW
					3000K	18°	3900lm	3300lm	TL4-8301824N-WW
						30°	3900lm	3500lm	TL4-8303024N-WW
						65°	3900lm	2950lm	TL4-8306524N-WW
					4000K	18°	4200lm	3500lm	TL4-8401824N-WW
						30°	4200lm	3800lm	TL4-8403024N-WW
						65°	4200lm	3200lm	TL4-8406524N-WW
36 W	40 W	34 V	1050 mA	80	2700K	18°	5600lm	4500lm	TL4-8271836N-WW
						30°	5600lm	4800lm	TL4-8273036N-WW
						65°	5600lm	4000lm	TL4-8276536N-WW
					3000K	18°	6000lm	4700lm	TL4-8301836N-WW
						30°	6000lm	5000lm	TL4-8303036N-WW
						65°	6000lm	4200lm	TL4-8306536N-WW
					4000K	18°	6500lm	5200lm	TL4-8401836N-WW
						30°	6500lm	5500lm	TL4-8403036N-WW
						65°	6500lm	4600lm	TL4-8406536N-WW
48 W	52 W	34 V	1400 mA	80	2700K	18°	6600lm	5600lm	TL4-8271848N-WW
						30°	6600lm	6000lm	TL4-8273048N-WW
						65°	6600lm	5000lm	TL4-8276548N-WW
					3000K	18°	6900lm	5900lm	TL4-8301848N-WW
						30°	6900lm	6300lm	TL4-8303048N-WW
						65°	6900lm	5300lm	TL4-8306548N-WW
					4000K	18°	7500lm	6500lm	TL4-8401848N-WW
						30°	7500lm	6900lm	TL4-8403048N-WW
						65°	7500lm	5800lm	TL4-8406548N-WW
24 W	26 W	34 V	700 mA	80	2700K	18°	3700lm	3100lm	TL4-8271824N-WB
						30°	3700lm	3300lm	TL4-8273024N-WB
						65°	3700lm	2800lm	TL4-8276524N-WB
					3000K	18°	3900lm	3300lm	TL4-8301824N-WB
						30°	3900lm	3500lm	TL4-8303024N-WB
						65°	3900lm	2950lm	TL4-8306524N-WB
					4000K	18°	4200lm	3500lm	TL4-8401824N-WB
						30°	4200lm	3800lm	TL4-8403024N-WB
						65°	4200lm	3200lm	TL4-8406524N-WB
36 W	40 W	34 V	1050 mA	80	2700K	18°	5600lm	4500lm	TL4-8271836N-WB
						30°	5600lm	4800lm	TL4-8273036N-WB
						65°	5600lm	4000lm	TL4-8276536N-WB
					3000K	18°	6000lm	4700lm	TL4-8301836N-WB
						30°	6000lm	5000lm	TL4-8303036N-WB
						65°	6000lm	4200lm	TL4-8306536N-WB
					4000K	18°	6500lm	5200lm	TL4-8401836N-WB
						30°	6500lm	5500lm	TL4-8403036N-WB
						65°	6500lm	4600lm	TL4-8406536N-WB
48 W	52 W	34 V	1400 mA	80	2700K	18°	6600lm	5600lm	TL4-8271848N-WB
						30°	6600lm	6000lm	TL4-8273048N-WB
						65°	6600lm	5000lm	TL4-8276548N-WB
					3000K	18°	6900lm	5900lm	TL4-8301848N-WB
						30°	6900lm	6300lm	TL4-8303048N-WB
						65°	6900lm	5300lm	TL4-8306548N-WB
					4000K	18°	7500lm	6500lm	TL4-8401848N-WB
						30°	7500lm	6900lm	TL4-8403048N-WB
						65°	7500lm	5800lm	TL4-8406548N-WB

ohne / none	179,00 €
ON-OFF	209,00 €
Phase Dim	219,00 €
DALI Dim	229,00 €

ohne / none	179,00 €
ON-OFF	209,00 €
DALI Dim	259,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T150C Pro
LED Ceiling Light

17W 24W | CRI80 CRI90 | 2700K 3000K 4000K | 30° 65° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	34 V	500 mA	80	2700K	30°	2600lm	2450lm	TMC4-8273017N-WM
						65°	2600lm	2100lm	TMC4-8276517N-WM
					3000K	30°	2800lm	2600lm	TMC4-8303017N-WM
						65°	2800lm	2200lm	TMC4-8306517N-WM
					4000K	30°	3000lm	2800lm	TMC4-8403017N-WM
						65°	3000lm	2400lm	TMC4-8406517N-WM
24 W	26 W	34 V	700 mA	80	2700K	30°	3400lm	3100lm	TMC4-8273024N-WM
						65°	3400lm	2700lm	TMC4-8276524N-WM
					3000K	30°	3600lm	3300lm	TMC4-8303024N-WM
						65°	3600lm	2850lm	TMC4-8306524N-WM
					4000K	30°	3900lm	3600lm	TMC4-8403024N-WM
						65°	3900lm	3100lm	TMC4-8406524N-WM

17 W	19 W	34 V	500 mA	80	2700K	30°	2600lm	2450lm	TMC4-8273017N-WB
						65°	2600lm	2100lm	TMC4-8276517N-WB
					3000K	30°	2800lm	2600lm	TMC4-8303017N-WB
						65°	2800lm	2200lm	TMC4-8306517N-WB
					4000K	30°	3000lm	2800lm	TMC4-8403017N-WB
						65°	3000lm	2400lm	TMC4-8406517N-WB
24 W	26 W	34 V	700 mA	80	2700K	30°	3400lm	3100lm	TMC4-8273024N-WB
						65°	3400lm	2700lm	TMC4-8276524N-WB
					3000K	30°	3600lm	3300lm	TMC4-8303024N-WB
						65°	3600lm	2850lm	TMC4-8306524N-WB
					4000K	30°	3900lm	3600lm	TMC4-8403024N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ON-OFF	279,00 €
Phase Dim	289,00 €
DALI Dim	339,00 €

Alle Gehäuse- und Reflektorfarben preisgleich

All housing and reflector colours at the same price

NEKO / TAKEO / TS100 Pro
Fixed LED Downlight

8.5W CRI80 2700K
12W CRI90 3000K
4000K
60°
CITIZEN 50,000h@L80B10
UGR < 19
IP54
5 YEARS GUARANTEE
CB CE
Intertek

100x100
1-25mm Ceiling Thickness
79
110x110

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	34 V	250 mA	80	2700K	60°	1300lm	900lm	TSS4-8276008N-WM
					3000K	60°	1400lm	950lm	TSS4-8306008N-WM
					4000K	60°	1500lm	1050lm	TSS4-8406008N-WM
12 W	14 W	34 V	350 mA	80	2700K	60°	1800lm	1250lm	TSS4-8276012N-WM
					3000K	60°	1900lm	1350lm	TSS4-8306012N-WM
					4000K	60°	2050lm	1500lm	TSS4-8406012N-WM



8.5 W	10 W	34 V	250 mA	80	2700K	60°	1300lm	900lm	TSS4-8276008N-WW
					3000K	60°	1400lm	950lm	TSS4-8306008N-WW
					4000K	60°	1500lm	1050lm	TSS4-8406008N-WW
12 W	14 W	34 V	350 mA	80	2700K	60°	1800lm	1250lm	TSS4-8276012N-WW
					3000K	60°	1900lm	1350lm	TSS4-8306012N-WW
					4000K	60°	2050lm	1500lm	TSS4-8406012N-WW

8.5 W	10 W	34 V	250 mA	80	2700K	60°	1300lm	900lm	TSS4-8276008N-WB
					3000K	60°	1400lm	950lm	TSS4-8306008N-WB
					4000K	60°	1500lm	1050lm	TSS4-8406008N-WB
12 W	14 W	34 V	350 mA	80	2700K	60°	1800lm	1250lm	TSS4-8276012N-WB
					3000K	60°	1900lm	1350lm	TSS4-8306012N-WB
					4000K	60°	2050lm	1500lm	TSS4-8406012N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	99,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI Dim	149,00 €

NEKO / TAKEO / TS150 Pro
Fixed LED Downlight

17W 24W | CRI80 CRI90 | 2700K 3000K 4000K | 70° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE | Intertek

150x150 | 1-25mm Ceiling Thickness | 100 | 167x167

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	34 V	500 mA	80	2700K	70°	2600lm	1850lm	TSM4-8277017N-WM
					3000K	70°	2800lm	1950lm	TSM4-8307017N-WM
					4000K	70°	3000lm	2100lm	TSM4-8407017N-WM
24 W	26 W	34 V	700 mA	80	2700K	70°	3400lm	2500lm	TSM4-8277024N-WM
					3000K	70°	3600lm	2600lm	TSM4-8307024N-WM
					4000K	70°	3900lm	2800lm	TSM4-8407024N-WM

17 W	19 W	34 V	500 mA	80	2700K	70°	2600lm	1850lm	TSM4-8277017N-WW
					3000K	70°	2800lm	1950lm	TSM4-8307017N-WW
					4000K	70°	3000lm	2100lm	TSM4-8407017N-WW
24 W	26 W	34 V	700 mA	80	2700K	70°	3400lm	2500lm	TSM4-8277024N-WW
					3000K	70°	3600lm	2600lm	TSM4-8307024N-WW
					4000K	70°	3900lm	2800lm	TSM4-8407024N-WW

17 W	19 W	34 V	500 mA	80	2700K	70°	2600lm	1850lm	TSM4-8277017N-WB
					3000K	70°	2800lm	1950lm	TSM4-8307017N-WB
					4000K	70°	3000lm	2100lm	TSM4-8407017N-WB
24 W	26 W	34 V	700 mA	80	2700K	70°	3400lm	2500lm	TSM4-8277024N-WB
					3000K	70°	3600lm	2600lm	TSM4-8307024N-WB
					4000K	70°	3900lm	2800lm	TSM4-8407024N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	169,00 €
ON-OFF	189,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

NEKO / TAKEO / TS200 Pro
Fixed LED Downlight

24W 36W | CRI80 CRI90 | 2700K 3000K 4000K | 70° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

200x200 | 1-25mm Ceiling Thickness | 132 | 220x220

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34V	700 mA	80	2700K	70°	3700lm	2300lm	TSL4-8277024N-WM
					3000K	70°	3900lm	2500lm	TSL4-8307024N-WM
					4000K	70°	4200lm	2700lm	TSL4-8407024N-WM
36 W	40 W	34 V	1050 mA	80	2700K	70°	5600lm	3500lm	TSL4-8277036N-WM
					3000K	70°	6000lm	3700lm	TSL4-8307036N-WM
					4000K	70°	6500lm	4000lm	TSL4-8407036N-WM

24 W	26 W	34V	700 mA	80	2700K	70°	3700lm	2300lm	TSL4-8277024N-WW
					3000K	70°	3900lm	2500lm	TSL4-8307024N-WW
					4000K	70°	4200lm	2700lm	TSL4-8407024N-WW
36 W	40 W	34 V	1050 mA	80	2700K	70°	5600lm	3500lm	TSL4-8277036N-WW
					3000K	70°	6000lm	3700lm	TSL4-8307036N-WW
					4000K	70°	6500lm	4000lm	TSL4-8407036N-WW

24 W	26 W	34V	700 mA	80	2700K	70°	3700lm	2300lm	TSL4-8277024N-WB
					3000K	70°	3900lm	2500lm	TSL4-8307024N-WB
					4000K	70°	4200lm	2700lm	TSL4-8407024N-WB
36 W	40 W	34 V	1050 mA	80	2700K	70°	5600lm	3500lm	TSL4-8277036N-WB
					3000K	70°	6000lm	3700lm	TSL4-8307036N-WB
					4000K	70°	6500lm	4000lm	TSL4-8407036N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	229,00 €
ON-OFF	249,00 €
Phase Dim	269,00 €
DALI Dim	289,00 €

NEKO / TAKEO / T75
Fixed LED Downlight

11W 7.5W | CRI80 CRI90 | 2700K 3000K 4000K | 25° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WM
						50°	1000lm	720lm	TT1-8275008N-WM
					3000K	25°	1100lm	750lm	TT1-8302508N-WM
						50°	1100lm	750lm	TT1-8305008N-WM
					4000K	25°	1200lm	800lm	TT1-8402508N-WM
						50°	1200lm	800lm	TT1-8405008N-WM
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WM
						50°	1300lm	900lm	TT2-8275011N-WM
					3000K	25°	1400lm	950lm	TT2-8302511N-WM
						50°	1400lm	950lm	TT2-8305011N-WM
					4000K	25°	1500lm	1050lm	TT2-8402511N-WM
						50°	1500lm	1050lm	TT2-8405011N-WM

7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WW
						50°	1000lm	720lm	TT1-8275008N-WW
					3000K	25°	1100lm	750lm	TT1-8302508N-WW
						50°	1100lm	750lm	TT1-8305008N-WW
					4000K	25°	1200lm	800lm	TT1-8402508N-WW
						50°	1200lm	800lm	TT1-8405008N-WW
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WW
						50°	1300lm	900lm	TT2-8275011N-WW
					3000K	25°	1400lm	950lm	TT2-8302511N-WW
						50°	1400lm	950lm	TT2-8305011N-WW
					4000K	25°	1500lm	1050lm	TT2-8402511N-WW
						50°	1500lm	1050lm	TT2-8405011N-WW

7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WB
						50°	1000lm	720lm	TT1-8275008N-WB
					3000K	25°	1100lm	750lm	TT1-8302508N-WB
						50°	1100lm	750lm	TT1-8305008N-WB
					4000K	25°	1200lm	800lm	TT1-8402508N-WB
						50°	1200lm	800lm	TT1-8405008N-WB
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WB
						50°	1300lm	900lm	TT2-8275011N-WB
					3000K	25°	1400lm	950lm	TT2-8302511N-WB
						50°	1400lm	950lm	TT2-8305011N-WB
					4000K	25°	1500lm	1050lm	TT2-8402511N-WB
						50°	1500lm	1050lm	TT2-8405011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	49,00 €
ON-OFF	69,00 €
Phase Dim	79,00 €
DALI Dim	99,00 €

NEKO / TAKEO / T100
Fixed LED Downlight

13W / 9W | 18W Available In Different LED Chip | CRI80 / CRI90 | 2700K / 3000K / 4000K | 30° / 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

100 | 1-25mm Ceiling Thickness | 79 | Ø110

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WM
						50°	1200lm	950lm	TS1-8275009N-WM
					3000K	30°	1300lm	1100lm	TS1-8303009N-WM
						50°	1300lm	1000lm	TS1-8305009N-WM
					4000K	30°	1400lm	1200lm	TS1-8403009N-WM
						50°	1400lm	1100lm	TS1-8405009N-WM
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WM
						50°	1700lm	1250lm	TS2-8275013N-WM
					3000K	30°	1800lm	1500lm	TS2-8303013N-WM
						50°	1800lm	1300lm	TS2-8305013N-WM
					4000K	30°	1900lm	1600lm	TS2-8403013N-WM
						50°	1900lm	1400lm	TS2-8405013N-WM

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WW
						50°	1200lm	950lm	TS1-8275009N-WW
					3000K	30°	1300lm	1100lm	TS1-8303009N-WW
						50°	1300lm	1000lm	TS1-8305009N-WW
					4000K	30°	1400lm	1200lm	TS1-8403009N-WW
						50°	1400lm	1100lm	TS1-8405009N-WW
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WW
						50°	1700lm	1250lm	TS2-8275013N-WW
					3000K	30°	1800lm	1500lm	TS2-8303013N-WW
						50°	1800lm	1300lm	TS2-8305013N-WW
					4000K	30°	1900lm	1600lm	TS2-8403013N-WW
						50°	1900lm	1400lm	TS2-8405013N-WW

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WB
						50°	1200lm	950lm	TS1-8275009N-WB
					3000K	30°	1300lm	1100lm	TS1-8303009N-WB
						50°	1300lm	1000lm	TS1-8305009N-WB
					4000K	30°	1400lm	1200lm	TS1-8403009N-WB
						50°	1400lm	1100lm	TS1-8405009N-WB
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WB
						50°	1700lm	1250lm	TS2-8275013N-WB
					3000K	30°	1800lm	1500lm	TS2-8303013N-WB
						50°	1800lm	1300lm	TS2-8305013N-WB
					4000K	30°	1900lm	1600lm	TS2-8403013N-WB
						50°	1900lm	1400lm	TS2-8405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	69,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	129,00 €

NEKO / TAKEO / T100
Fixed LED Downlight

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WM
						50°	2000lm	1500lm	TS3-8275018N-WM
					3000K	30°	2200lm	1900lm	TS3-8303018N-WM
						50°	2200lm	1600lm	TS3-8305018N-WM
					4000K	30°	2400lm	2000lm	TS3-8403018N-WM
						50°	2400lm	1700lm	TS3-8405018N-WM
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WM
						50°	1800lm	1300lm	TS3-9275018N-WM
					3000K	30°	1900lm	1650lm	TS3-9303018N-WM
						50°	1900lm	1400lm	TS3-9305013N-WM
					4000K	30°	2100lm	1800lm	TS3-9403018N-WM
						50°	2100lm	1500lm	TS3-9405018N-WM

18 W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WW
						50°	2000lm	1500lm	TS3-8275018N-WW
					3000K	30°	2200lm	1900lm	TS3-8303018N-WW
						50°	2200lm	1600lm	TS3-8305018N-WW
					4000K	30°	2400lm	2000lm	TS3-8403018N-WW
						50°	2400lm	1700lm	TS3-8405018N-WW
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WW
						50°	1800lm	1300lm	TS3-9275018N-WW
					3000K	30°	1900lm	1650lm	TS3-9303018N-WW
						50°	1900lm	1400lm	TS3-9305018N-WW
					4000K	30°	2100lm	1800lm	TS3-9403018N-WW
						50°	2100lm	1500lm	TS3-9405018N-WW

18W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WB
						50°	2000lm	1500lm	TS3-8275018N-WB
					3000K	30°	2200lm	1900lm	TS3-8303018N-WB
						50°	2200lm	1600lm	TS3-8305018N-WB
					4000K	30°	2400lm	2000lm	TS3-8403018N-WB
						50°	2400lm	1700lm	TS3-8405018N-WB
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WB
						50°	1800lm	1300lm	TS3-9275018N-WB
					3000K	30°	1900lm	1650lm	TS3-9303018N-WB
						50°	1900lm	1400lm	TS3-9305018N-WB
					4000K	30°	2100lm	1800lm	TS3-9403018N-WB
						50°	2100lm	1500lm	TS3-9405018N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	79,00 €
ON-OFF	99,00 €
Phase Dim	109,00 €
DALI Dim	139,00 €

NEKO / TAKEO / T100 Dim-to-Warm
Fixed LED Downlight

12W | CRI95 | 1800K-3000K Dim to Warm | 50° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K-3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WM

12 W	14 W	34 V	350 mA	95	1800K-3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WW

12 W	14 W	34 V	350 mA	95	1800K-3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WB

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	109,00 €
Phase Dim	139,00 €
DALI Dim	159,00 €

NEKO / TAKEO / T100 Tunable White
Fixed LED Downlight

13W | CRI90 | 2700K-6500K Tunable White | 50° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K-6500K	50°	Max.900lm	TS2-9TW5013N-WM
					@2700K	50°	750lm	
					@3000K	50°	780lm	
					@4000K	50°	850lm	
					@5000K	50°	900lm	
					@6500K	50°	900lm	

13 W	15 W	36 V	350 mA	90	2700K-6500K	50°	Max.900lm	TS2-9TW5013N-WW
					@2700K	50°	750lm	
					@3000K	50°	780lm	
					@4000K	50°	850lm	
					@5000K	50°	900lm	
					@6500K	50°	900lm	

13 W	15 W	36 V	350 mA	90	2700K-6500K	50°	Max.900lm	TS2-9TW5013N-WB
					@2700K	50°	750lm	
					@3000K	50°	780lm	
					@4000K	50°	850lm	
					@5000K	50°	900lm	
					@6500K	50°	900lm	

Code Remark: N=N(No Driver) D=D(DALI Dim)

ohne / none	179,00 €
DALI Dim	299,00 €

NEKO / TAKEO / T150
Fixed LED Downlight

25W 18W | CRI80 CRI90 | 2700K 3000K 4000K | 30° 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE | Intertek

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WM
						60°	2600lm	1950lm	TM1-8276018N-WM
					3000K	30°	2800lm	2300lm	TM1-8303018N-WM
						60°	2800lm	2000lm	TM1-8306018N-WM
					4000K	30°	3000lm	2500lm	TM1-8403018N-WM
						60°	3000lm	2200lm	TM1-8406018N-WM
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WM
						60°	3600lm	2600lm	TM2-8276025N-WM
					3000K	30°	3800lm	3100lm	TM2-8303025N-WM
						60°	3800lm	2700lm	TM2-8306025N-WM
					4000K	30°	4000lm	3300lm	TM2-8403025N-WM
						60°	4000lm	2900lm	TM2-8406025N-WM

18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WW
						60°	2600lm	1950lm	TM1-8276018N-WW
					3000K	30°	2800lm	2300lm	TM1-8303018N-WW
						60°	2800lm	2000lm	TM1-8306018N-WW
					4000K	30°	3000lm	2500lm	TM1-8403018N-WW
						60°	3000lm	2200lm	TM1-8406018N-WW
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WW
						60°	3600lm	2600lm	TM2-8276025N-WW
					3000K	30°	3800lm	3100lm	TM2-8303025N-WW
						60°	3800lm	2700lm	TM2-8306025N-WW
					4000K	30°	4000lm	3300lm	TM2-8403025N-WW
						60°	4000lm	2900lm	TM2-8406025N-WW

18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WB
						60°	2600lm	1950lm	TM1-8276018N-WB
					2700K	30°	2800lm	2300lm	TM1-8303018N-WB
						60°	2800lm	2000lm	TM1-8306018N-WB
					4000K	30°	3000lm	2500lm	TM1-8403018N-WB
						60°	3000lm	2200lm	TM1-8406018N-WB
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WB
						60°	3600lm	2600lm	TM2-8276025N-WB
					3000K	30°	3800lm	3100lm	TM2-8303025N-WB
						60°	3800lm	2700lm	TM2-8306025N-WB
					4000K	30°	4000lm	3300lm	TM2-8403025N-WB
						60°	4000lm	2900lm	TM2-8406025N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	119,00 €
ON-OFF	139,00 €
Phase Dim	149,00 €
DALI Dim	169,00 €

NEKO / TAKEO / T150 Tunable White
Fixed LED Downlight

25W 18W | CRI90 | 2700K-6500K Tunable White | 60° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K-6500K	60°	Max.1400lm	TM1-9TW6018N-WM
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TM2-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

18 W	21 W	36 V	500 mA	90	2700K-6500K	60°	Max.1400lm	TM1-9TW6018N-WW
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TM2-9TW6025N-WW
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

18 W	21 W	36 V	500 mA	90	2700K-6500K	60°	Max.1400lm	TM1-9TW6018N-WB
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TM2-9TW6025N-WB
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI Dim)

ohne / none	229,00 €
DALI Dim	359,00 €

NEKO / TAKEO / T200

Fixed LED Downlight

38W 52W | CRI80 CRI90 | 2700K 3000K 4000K | 18° 30° 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WM
						30°	5200lm	4300lm	TL2-8273038N-WM
						60°	5200lm	3800lm	TL2-8276038N-WM
					3000K	18°	5400lm	4400lm	TL2-8301838N-WM
						30°	5400lm	4400lm	TL2-8303038N-WM
						60°	5400lm	3900lm	TL2-8306038N-WM
					4000K	18°	5600lm	4600lm	TL2-8401838N-WM
						30°	5600lm	4600lm	TL2-8403038N-WM
						60°	5600lm	4100lm	TL2-8406038N-WM
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WM
						30°	6400lm	5300lm	TL3-8273052N-WM
						60°	6400lm	4700lm	TL3-8276052N-WM
					3000K	18°	6600lm	5400lm	TL3-8301852N-WM
						30°	6600lm	5400lm	TL3-8303052N-WM
						60°	6600lm	4800lm	TL3-8306052N-WM
					4000K	18°	6800lm	5600lm	TL3-8401852N-WM
						30°	6800lm	5600lm	TL3-8403052N-WM
						60°	6800lm	5000lm	TL3-8406052N-WM

ohne / none	169,00 €
ON-OFF	189,00 €
Phase Dim	199,00 €
DALI Dim	229,00 €

ohne / none	169,00 €
ON-OFF	199,00 €
DALI Dim	249,00 €

38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WW
						30°	5200lm	4300lm	TL2-8273038N-WW
						60°	5200lm	3800lm	TL2-8306038N-WW
					3000K	18°	5400lm	4400lm	TL2-8301838N-WW
						30°	5400lm	4400lm	TL2-8303038N-WW
						60°	5400lm	3900lm	TL2-8306038N-WW
					4000K	18°	5600lm	4600lm	TL2-8401838N-WW
						30°	5600lm	4600lm	TL2-8403038N-WW
						60°	5600lm	4100lm	TL2-8406038N-WW
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WW
						30°	6400lm	5300lm	TL3-8273052N-WW
						60°	6400lm	4700lm	TL3-8306052N-WW
					3000K	18°	6600lm	5400lm	TL3-8301852N-WW
						30°	6600lm	5400lm	TL3-8303052N-WW
						60°	6600lm	4800lm	TL3-8306052N-WW
					4000K	18°	6800lm	5600lm	TL3-8401852N-WW
						30°	6800lm	5600lm	TL3-8403052N-WW
						60°	6800lm	5000lm	TL3-8406052N-WW

ohne / none	169,00 €
ON-OFF	189,00 €
Phase Dim	199,00 €
DALI Dim	229,00 €

ohne / none	169,00 €
ON-OFF	199,00 €
DALI Dim	249,00 €

38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WB
						30°	5200lm	4300lm	TL2-8273038N-WB
						60°	5200lm	3800lm	TL2-8276038N-WB
					3000K	18°	5400lm	4400lm	TL2-8301838N-WB
						30°	5400lm	4400lm	TL2-8303038N-WB
						60°	5400lm	3900lm	TL2-8306038N-WB
					4000K	18°	5600lm	4600lm	TL2-8401838N-WB
						30°	5600lm	4600lm	TL2-8403038N-WB
						60°	5600lm	4100lm	TL2-8406038N-WB
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WB
						30°	6400lm	5300lm	TL3-8273052N-WB
						60°	6400lm	4700lm	TL3-8276052N-WB
					3000K	18°	6600lm	5400lm	TL3-8301852N-WB
						30°	6600lm	5400lm	TL3-8303052N-WB
						60°	6600lm	4800lm	TL3-8306052N-WB
					4000K	18°	6800lm	5600lm	TL3-8401852N-WB
						30°	6800lm	5600lm	TL3-8403052N-WB
						60°	6800lm	5000lm	TL3-8406052N-WB

ohne / none	169,00 €
ON-OFF	199,00 €
DALI Dim	249,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T200 Tunable White
Fixed LED Downlight

25W | CRI90 | 2700K-6500K Tunable White | 60° | bridgelux. 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WW
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WB
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI Dim)

ohne / none	289,00 €
DALI Dim	409,00 €

NEKO / TAKEO / TS68
Fixed LED Downlight

7.5 W / 11 W | CRI80 / CRI90 | 2700K 3000K 4000K | 25° 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WM
						60°	1000lm	680lm	TTS1-8276008N-WM
					3000K	25°	1100lm	700lm	TTS1-8302508N-WM
						60°	1100lm	700lm	TTS1-8306008N-WM
					4000K	25°	1200lm	750lm	TTS1-8402508N-WM
						60°	1200lm	750lm	TTS1-8406008N-WM
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WM
						60°	1300lm	870lm	TTS2-8276011N-WM
					3000K	25°	1400lm	900lm	TTS2-8302511N-WM
						60°	1400lm	900lm	TTS2-8306011N-WM
					4000K	25°	1500lm	950lm	TTS2-8402511N-WM
						60°	1500lm	950lm	TTS2-8406011N-WM

7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WW
						60°	1000lm	680lm	TTS1-8276008N-WW
					3000K	25°	1100lm	700lm	TTS1-8302508N-WW
						60°	1100lm	700lm	TTS1-8306008N-WW
					4000K	25°	1200lm	750lm	TTS1-8402508N-WW
						60°	1200lm	750lm	TTS1-8406008N-WW
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WW
						60°	1300lm	870lm	TTS2-8276011N-WW
					3000K	25°	1400lm	900lm	TTS2-8302511N-WW
						60°	1400lm	900lm	TTS2-8306011N-WW
					4000K	25°	1500lm	950lm	TTS2-8402511N-WW
						60°	1500lm	950lm	TTS2-8406011N-WW

7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WB
						60°	1000lm	680lm	TTS1-8276008N-WB
					3000K	25°	1100lm	700lm	TTS1-8302508N-WB
						60°	1100lm	700lm	TTS1-8306008N-WB
					4000K	25°	1200lm	750lm	TTS1-8402508N-WB
						60°	1200lm	750lm	TTS1-8406008N-WB
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WB
						60°	1300lm	870lm	TTS2-8276011N-WB
					3000K	25°	1400lm	900lm	TTS2-8302511N-WB
						60°	1400lm	900lm	TTS2-8306011N-WB
					4000K	25°	1500lm	950lm	TTS2-8402511N-WB
						60°	1500lm	950lm	TTS2-8406011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	69,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	119,00 €

NEKO / TAKEO / TS100
Fixed LED Downlight

9 W / 13W | CRI80 / CRI90 | 2700K 3000K 4000K | 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

100x100 | 1-25mm Ceiling Thickness | 79 | 110x110

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WM
					3000K	60°	1300lm	900lm	TSS1-8306009N-WM
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WM
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WM
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WM
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WM



9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WW
					3000K	60°	1300lm	900lm	TSS1-8306009N-WW
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WW
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WW
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WW
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WW

9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WB
					3000K	60°	1300lm	900lm	TSS1-8306009N-WB
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WB
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WB
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WB
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	89,00 €
ON-OFF	99,00 €
Phase Dim	119,00 €
DALI Dim	139,00 €

Dim-to-Warm	
ohne / none	129,00 €
Phase Dim	149,00 €
DALI Dim	169,00 €

Tunable White	
ohne / none	189,00 €
DALI Dim	319,00 €

NEKO / TAKEO / TS150
Fixed LED Downlight

18W 25W | CRI80 CRI90 | 2700K 3000K 4000K | 70° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE | Intertek

150x150 | 1-25mm Ceiling Thickness | 100 | 167x167

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WM
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WM
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WM
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WM
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WM
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WM

18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WW
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WW
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WW
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WW
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WW
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WW

18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WB
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WB
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WB
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WB
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WB
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	159,00 €
ON-OFF	179,00 €
Phase Dim	189,00 €
DALI Dim	209,00 €

Tunable White	
ohne / none	189,00 €
DALI Dim	319,00 €

NEKO / TAKEO / TS200
Fixed LED Downlight

25W 38W | CRI80 CRI90 | 2700K 3000K 4000K | 70° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE | Intertek

200x200 | 1-25mm Ceiling Thickness | 132 | 220x220

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WM
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WM
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WM
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WM
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WM
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WM

25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WW
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WW
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WW
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WW
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WW
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WW

25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WB
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WB
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WB
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WB
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WB
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	209,00 €
ON-OFF	229,00 €
Phase Dim	239,00 €
DALI Dim	269,00 €

Tunable White - 25W	
ohne / none	329,00 €
DALI Dim	459,00 €

NEKO / CLUB

Trim Series

- Perfect choice for specified architectural projects
- Compatible with Mr16 and LED Modules
- Wide range of design variants for different applications
- Available in trimless versions
- Decorative rings painted in a variety of colors (black, white, marble, wood, etc.)
- Magnetic design for changing decorative ring without any tools

M3

Module

Ring

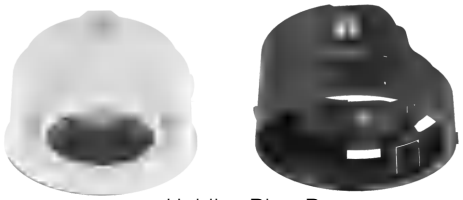

Holding Ring-R

Trim



TA Pre-installation Trim

KA-EI Pre-installation Trim

KA Pre-installation Trim

Reflector

NEW



TA8



TRF1



TRF1-IP44

TA5

TA5-IP65

TA6



KA8-EI

KRF1-EI

KRF1-IP44



KA5-EI

KA6-EI

KA8

KRF1

KRF1-IP44

KA5

KA6

White-Matt
Code: A8 WM

White-White
Code: A8 WW

White-Black
Code: A8 WB

White-Gold
Code: A8 WG

Matt
Code: RF1 MR

White
Code: RF1 WR

Matt
Code: A5 MR

White
Code: A5 WR

Matt
Code: A6 MD

White
Code: A6 WD

Black
Code: A6 BD

Gold
Code: A6 GD

Black-Matt
Code: A8 BM

Black-Black
Code: A8 BB

Black-Gold
Code: A8 BG

Black
Code: RF1 BR

Gold
Code: RF1 GR

Black
Code: A5 BR

Gold
Code: A5 GR



Black
Code: A6 BDC

White
Code: A6 WDC

Wood
Code: A6 WODC



Marble
Code: A6 MBDC

M4

M4 Pro



Honeycomb

Linear Spread Lens

Diffuser

Holding Ring-S



TSA Pre-installation Trim

75X75

KSA-EI Pre-installation Trim

80X80

KSA Pre-installation Trim

75X75

Decoration Ring

Decoration Ring Cover

Decoration Ring

Decoration Ring Cover

TA7

TSA1

TSA2

TSA3



KA7-EI



KSA1-EI

KSA2-EI

KSA3-EI

KA7

KSA1

KSA2

KSA3

Matt
Code: A7 MD

White
Code: A7 WD

Black
Code: A7 BD

Gold
Code: A7 GD

Matt
Code: SA1 MR

White
Code: SA1 WR

Matt
Code: SA2 MD

White
Code: SA2 WD

Black
Code: SA2 BD

Gold
Code: SA2 GD

White-Matt
Code: SA3 WM

White-White
Code: SA3 WW

White-Black
Code: SA3 WB

White-Gold
Code: SA3 WG



Black
Code: A7 BDC

White
Code: A7 WDC

Wood
Code: A7 WODC

Marble
Code: A7 MBDC

Black
Code: SA1 BR

Gold
Code: SA1 GR



Black
Code: SA2 BDC

White
Code: SA2 WDC

Wood
Code: SA2 WODC

Marble
Code: SA2 MBDC

Black-Matt
Code: SA3 BM

Black-Black
Code: SA3 BB

Black-Gold
Code: SA3 BG

NEKO / M3
LED Downlight Module
Fit with CLUB Series Trims

11W 7.5W | CRI90 | 2700K 3000K 4000K | 15° 25° 35° 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE | Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	31 V	350 mA	90	2700K	15°	1000lm	900lm	M3- 9271511N-NN
						25°	1000lm	900lm	M3- 9272511N-NN
						35°	1000lm	900lm	M3- 9273511N-NN
						60°	1000lm	900lm	M3- 9276011N-NN
					3000K	15°	1100lm	950lm	M3- 9301511N-NN
						25°	1100lm	950lm	M3- 9302511N-NN
						35°	1100lm	950lm	M3- 9303511N-NN
						60°	1100lm	950lm	M3- 9306011N-NN
					4000K	15°	1200lm	1000lm	M3- 9401511N-NN
						25°	1200lm	1000lm	M3- 9402511N-NN
						35°	1200lm	1000lm	M3- 9403511N-NN
						60°	1200lm	1000lm	M3- 9406011N-NN
7.5W	9 W	31 V	250 mA	90	2700K	15°	850lm	650lm	M3- 9271508N-NN
						25°	850lm	650lm	M3- 9272508N-NN
						35°	850lm	650lm	M3- 9273508N-NN
						60°	850lm	650lm	M3- 9276008N-NN
					3000K	15°	900lm	700lm	M3- 9301508N-NN
						25°	900lm	700lm	M3- 9302508N-NN
						35°	900lm	700lm	M3- 9303508N-NN
						60°	900lm	700lm	M3- 9306008N-NN
					4000K	15°	950lm	750lm	M3- 9401508N-NN
						25°	950lm	750lm	M3- 9402508N-NN
						35°	950lm	750lm	M3- 9403508N-NN
						60°	950lm	750lm	M3- 9406008N-NN

ohne / none	49,00 €
ON-OFF	59,00 €
Phase Dim	69,00 €
DALI Dim	99,00 €

ohne / none	49,00 €
ON-OFF	59,00 €
Phase Dim	69,00 €
DALI Dim	99,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / M3 / Dim-to-Warm
LED Downlight Module
Fit with CLUB Series Trims

12W | CRI95 | 1800K-3000K Dim to Warm | 35° 60° | bridgelux 50,000h@L80B10 | Replace Halogen 50W | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K–3000K	35°	1100lm	Max.850lm	M3- 9D33512N-NN
						60°	1100lm	Max.850lm	M3- 9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	79,00 €
Phase Dim	109,00 €
DALI Dim	129,00 €

NEKO / M4
LED Downlight Module
Fit with CLUB Series Trims

13W 9W | 18W Available In Different LED Chip | CRI90 | 2700K 3000K 4000K | 20° 35° 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE | ETL Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1300lm	1100lm	M4- 9272013N-NN
						35°	1300lm	1100lm	M4- 9273513N-NN
						60°	1300lm	1100lm	M4- 9276013N-NN
					3000K	20°	1400lm	1200lm	M4- 9302013N-NN
						35°	1400lm	1200lm	M4- 9303513N-NN
						60°	1400lm	1200lm	M4- 9306013N-NN
					4000K	20°	1500lm	1300lm	M4- 9402013N-NN
						35°	1500lm	1300lm	M4- 9403513N-NN
						60°	1500lm	1300lm	M4- 9406013N-NN
9W	11 W	36 V	250 mA	90	2700K	20°	900lm	800lm	M4- 9272009N-NN
						35°	900lm	800lm	M4- 9273509N-NN
						60°	900lm	800lm	M4- 9276009N-NN
					3000K	20°	1000lm	850lm	M4- 9302009N-NN
						35°	1000lm	850lm	M4- 9303509N-NN
						60°	1000lm	850lm	M4- 9306009N-NN
					4000K	20°	1100lm	950lm	M4- 9402009N-NN
						35°	1100lm	950lm	M4- 9403509N-NN
						60°	1100lm	950lm	M4- 9406009N-NN
18W	21 W	36 V	500 mA	90	2700K	20°	1800lm	1500lm	M4- 9272018N-NN
						35°	1800lm	1500lm	M4- 9273518N-NN
						60°	1800lm	1500lm	M4- 9276018N-NN
					3000K	20°	1900lm	1600lm	M4- 9302018N-NN
						35°	1900lm	1600lm	M4- 9303518N-NN
						60°	1900lm	1600lm	M4- 9306018N-NN
					4000K	20°	2000lm	1700lm	M4- 9402018N-NN
						35°	2000lm	1700lm	M4- 9403518N-NN
						60°	2000lm	1700lm	M4- 9406018N-NN

ohne / none	59,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI Dim	109,00 €

ohne / none	59,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI Dim	109,00 €

ohne / none	69,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	119,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / M4 / Dim-to-Warm
LED Downlight Module
Fit with CLUB Series Trims

12W | CRI95 | 1800K-3000K Dim to Warm | 35° 60° | bridgelux 50,000h@L80B10 | Replace Halogen 50W | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K–3000K	35°	1100lm	Max.850lm	M4- 9D33512N-NN
						60°	1100lm	Max.850lm	M4- 9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	99,00 €
Phase Dim	119,00 €
DALI Dim	149,00 €

NEKO / M4 Pro
Architectural LED Downlight Module
Fit with CLUB Series Trims

13W 18W | CRI97 | 2700K 3000K 3500K 4000K | 15° 25° 35° 50° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	97	2700K	15°	1300lm	1050lm	M4P3- 0271513N-NN
						25°	1300lm	1050lm	M4P3- 0272513N-NN
						35°	1300lm	1050lm	M4P3- 0273513N-NN
						50°	1300lm	1000lm	M4P3- 0275013N-NN
					3000K	15°	1400lm	1100lm	M4P3- 0301513N-NN
						25°	1400m	1100lm	M4P3- 0302513N-NN
						35°	1400lm	1100lm	M4P3- 0303513N-NN
						50°	1400lm	1050lm	M4P3- 0305013N-NN
					3500K	15°	1450lm	1150lm	M4P3- 0351513N-NN
						25°	1450lm	1150lm	M4P3- 0352513N-NN
						35°	1450lm	1150lm	M4P3- 0353513N-NN
						50°	1450lm	1100lm	M4P3- 0355013N-NN
					4000K	15°	1500lm	1200lm	M4P3- 0401513N-NN
						25°	1500lm	1200lm	M4P3- 0402513N-NN
						35°	1500lm	1200lm	M4P3- 0403513N-NN
						50°	1500lm	1150lm	M4P3- 0405013N-NN
18 W	21 W	36 V	500 mA	97	2700K	18°	1900lm	1500lm	M4P4- 0271818N-NN
						30°	1900lm	1500lm	M4P4- 0273018N-NN
						36°	1900lm	1500lm	M4P4- 0273618N-NN
						50°	1900lm	1400lm	M4P4- 0275018N-NN
					3000K	18°	2000lm	1600lm	M4P4- 0301818N-NN
						30°	2000m	1600lm	M4P4- 0303018N-NN
						36°	2000lm	1600lm	M4P4- 0303618N-NN
						50°	2000lm	1500lm	M4P4- 0305018N-NN
					3500K	18°	2100lm	1650lm	M4P4- 0351818N-NN
						30°	2100lm	1650lm	M4P4- 0353018N-NN
						36°	2100lm	1650lm	M4P4- 0353618N-NN
						50°	2100lm	1600lm	M4P4- 0355018N-NN
					4000K	18°	2200lm	1700lm	M4P4- 0401818N-NN
						30°	2200lm	1700lm	M4P4- 0403018N-NN
						36°	2200lm	1700lm	M4P4- 0403618N-NN
						50°	2200lm	1650lm	M4P4- 0405018N-NN

ohne / none	69,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	139,00 €

ohne / none	79,00 €
ON-OFF	99,00 €
Phase Dim	109,00 €
DALI Dim	149,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / M4 Pro / 10°
Architectural LED Downlight Module
Fit with CLUB Series Trims

7W | CRI97 | 2700K 3000K 3500K 4000K | 10° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	97	2700K	10°	650lm	500lm	M4P1- 0271007N-NN
					3000K	10°	700lm	550lm	M4P1- 0301007N-NN
					3500K	10°	725lm	600lm	M4P1- 0351007N-NN
					4000K	10°	750lm	650lm	M4P1- 0401007N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	69,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	139,00 €

NEKO / M4 Pro / Dim-to-Warm
Architectural LED Downlight Module
Fit with CLUB Series Trims

12W | CRI95 | 1800K-3000K Dim to Warm | 38° 50° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K-3000K	38°	1100lm	Max.900lm	M4P5-0D33812N-NN
						50°	1100lm	Max.850lm	M4P5-0D35012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	89,00 €
Phase Dim	119,00 €
DALI Dim	159,00 €

NEKO / M4 Pro / Tunable White
Architectural LED Downlight Module
Fit with CLUB Series Trims

9W 13W | CRI90 | 2700K-6500K Tunable White | 20° 38° 50° | bridgelux 50,000h@L80B10 | UGR < 19 | IP54 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K-6500K	20°	700lm-850lm	M4P6-9TW2009N-NN
						38°	700lm-850lm	M4P6-9TW3809N-NN
						50°	620lm-750lm	M4P6-9TW5009N-NN
					@2700K	38°	700lm	
					@3000K	38°	730lm	
					@4000K	38°	800lm	
					@5000K	38°	850lm	
					@6500K	38°	850lm	
13 W	15 W	36 V	350 mA	90	2700K-6500K	20°	900lm-1100lm	M4P6-9TW2013N-NN
						38°	900lm-1100lm	M4P6-9TW3813N-NN
						50°	850lm-1050lm	M4P6-9TW5013N-NN
					@2700K	38°	900lm	
					@3000K	38°	950lm	
					@4000K	38°	1000lm	
					@5000K	38°	1100lm	
					@6500K	38°	1100lm	

ohne / none	99,00 €
DALI Dim	189,00 €

ohne / none	99,00 €
DALI Dim	189,00 €

Code Remark: N=N(No Driver) D=D(DT8 DALI Dim)

TA5 — 25,00 €

IP65: 39,00 €

M3-TA5




M4-TA5



TA6 — 29,00 €

M3-TA6



M4-TA6



KA5 — 35,00 €

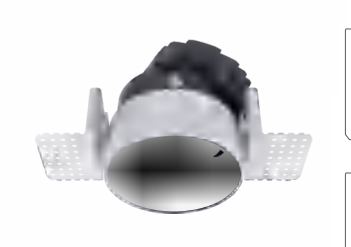

M3-KA5




M4-KA5



KA6 — 39,00 €


M3-TA6



M4-TA6



TA7 — 29,00 €

M3-TA7




M4-TA7



TA8 — 29,00 €

M3-TA8



M4-TA8



KA7 39,00 €

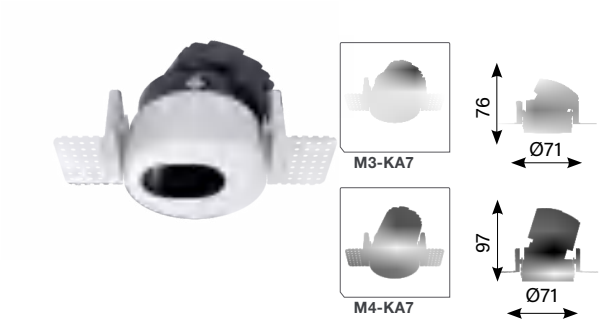

KA8 45,00 €

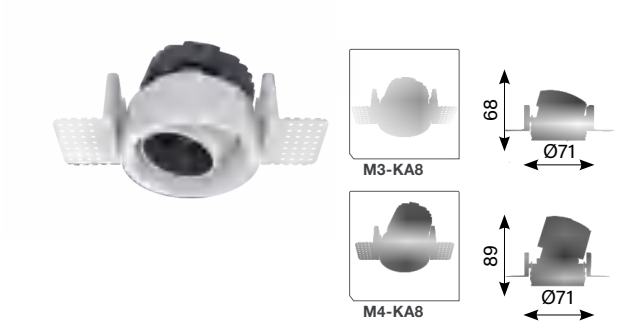

TRF1 29,00 €

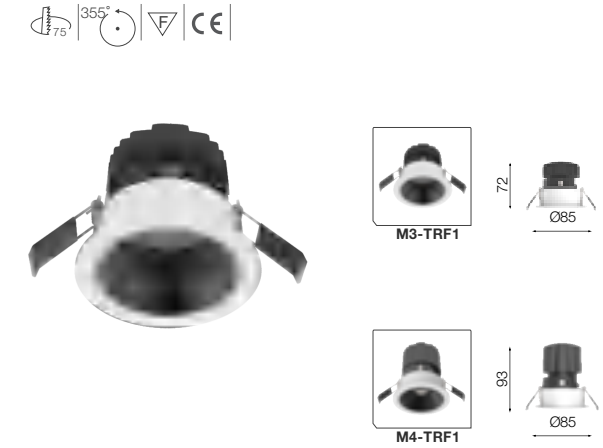

TSA1 35,00 €

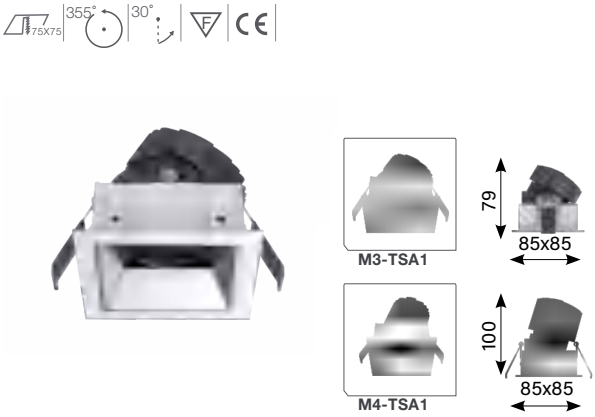

KRF1 45,00 €

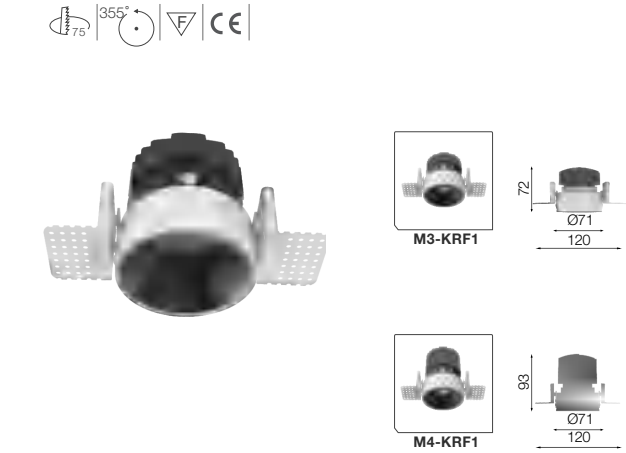

KSA1 45,00 €

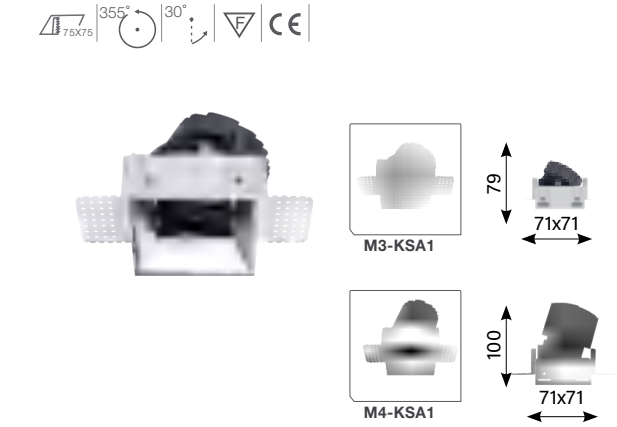

TSA2 39,00 €

M3-TSA2



M4-TSA2



TSA3 35,00 €

M3-TSA3



M4-TSA3



KSA2 49,00 €

M3-KSA2





M4-KSA2



KSA3 45,00 €

M3-KSA3





M45-KSA3



TSA1D 75,00 €

145X75 | 355° | 30° | F | CE

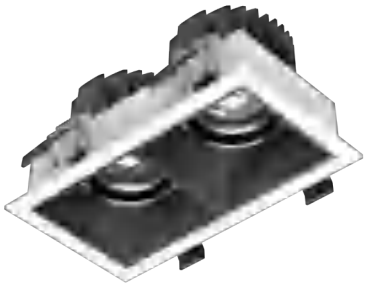



TSA2D 85,00 €

145X75 | F | CE

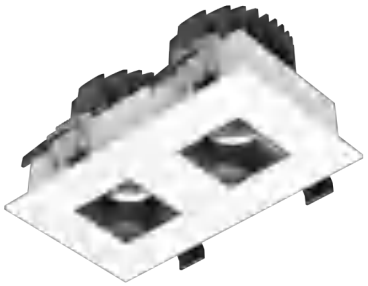



KSA1D 85,00 €

145X75 | 355° | 18° | F | CE





KSA2D 95,00 €

145X75 | F | CE





TSA3D 60,00 €

145X75 | 355° | 18° | F | CE

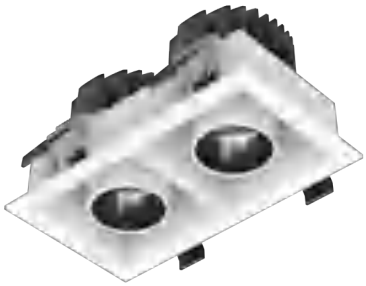



KSA3D 70,00 €

145X75 | F | CE





NEKO / SKYJACK A68
LED Downlight
Incl. Phase Dim Driver & Fast Connection Junction Box

NEW

9W | CRI90 | 2700K 3000K | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | IP 44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJA1-9273809P-WW
					3000K	38°	950lm	750lm	SJA1-9303809P-WW

Code Remark: P=(Phase Dim)

9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJA1-9273809P-BB
					3000K	38°	950lm	750lm	SJA1-9303809P-BB

Code Remark: P=(Phase Dim)

Phase Dim	59,00 €

6W | CRI90 | 1800K-3000K Dim to Warm | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | IP 44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.450lm	SJA1-9D33806P-WW

Code Remark: P=(Phase Dim)

6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.450lm	SJA1-9D33806P-BB

Code Remark: P=(Phase Dim)

Phase Dim	79,00 €

NEKO / SKYJACK D
LED Downlight
Incl. Phase Dim Driver & Fast Connection Junction Box

NEW

9W | CRI90 | 2700K 3000K | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | UGR < 19 | IP 44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	700lm	SJD-9273809P-WW
					3000K	38°	950lm	750lm	SJD-9303809P-WW

Code Remark: P=(Phase Dim)

9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	650lm	SJD-9273809P-BB
					3000K	38°	950lm	700lm	SJD-9303809P-BB

Code Remark: P=(Phase Dim)

Phase Dim	69,00 €

6W | CRI90 | 1800K-3000K Dim to Warm | 38° | ±30° Tiltable | bridgelux 50,000h@L80B10 | IP 44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.450lm	SJD-9D33806P-WW

Code Remark: P=(Phase Dim)

6 W	8 W	18 V	350 mA	90	1800K-3000K	38°	650lm	Max.400lm	SJD-9D33806P-BB

Code Remark: P=(Phase Dim)

Phase Dim	89,00 €

NEKO / SKYJACK F
LED Downlight
Incl. Phase Dim Driver & Fast Connection Junction Box

NEW

9W | CRI90 | 2700K 3000K | 38° | bridgelux 50,000h@L80B10 | IP65 FRONT | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJF-9273809P-WW
					3000K	38°	950lm	750lm	SJF-9303809P-WW

Code Remark: P=(Phase Dim)

9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJF-9273809P-BB
					3000K	38°	950lm	750lm	SJF-9303809P-BB

Code Remark: P=(Phase Dim)

Phase Dim	79,00 €

NEKO / SKYJACK A145
LED Downlight

NEW

25W | CRI90 | 3000K | 30° | ±30° Tiltable | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-WW

Code Remark: N=F (ON-OFF) N=P (Phase Dim) N=D (DALI Dim)

25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-BB

Code Remark: N=F (ON-OFF) N=P (Phase Dim) N=D (DALI Dim)

ohne / none	109,00 €
ON-OFF	129,00 €
Phase Dim	139,00 €
DALI Dim	179,00 €

NEKO / KENZO / K1X30
Adjustable LED Spotlight

4W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 30° 55° | CREE 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WB
						30°	350lm	300lm	K1S-9273004N-WB
						55°	350lm	300lm	K1S-9275504N-WB
					3000K	15°	400lm	320lm	K1S-9301504N-WB
						30°	400lm	320lm	K1S-9303004N-WB
						55°	400lm	320lm	K1S-9305504N-WB
					4000K	15°	450lm	350lm	K1S-9401504N-WB
						30°	450lm	350lm	K1S-9403004N-WB
						55°	450lm	350lm	K1S-9405504N-WB

4 W	6 W	12 V	350 mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WW
						30°	350lm	300lm	K1S-9273004N-WW
						55°	350lm	300lm	K1S-9275504N-WW
					3000K	15°	400lm	320lm	K1S-9301504N-WW
						30°	400lm	320lm	K1S-9303004N-WW
						55°	400lm	320lm	K1S-9305504N-WW
					4000K	15°	450lm	350lm	K1S-9401504N-WW
						30°	450lm	350lm	K1S-9403004N-WW
						55°	450lm	350lm	K1S-9405504N-WW

4 W	6 W	12 V	350 mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WG
						30°	350lm	300lm	K1S-9273004N-WG
						55°	350lm	300lm	K1S-9275504N-WG
					3000K	15°	400lm	320lm	K1S-9301504N-WG
						30°	400lm	320lm	K1S-9303004N-WG
						55°	400lm	320lm	K1S-9305504N-WG
					4000K	15°	450lm	350lm	K1S-9401504N-WG
						30°	450lm	350lm	K1S-9403004N-WG
						55°	450lm	350lm	K1S-9405504N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

ohne / none	69,00 €
ON-OFF	89,00 €
Phase Dim	109,00 €
DALI Dim	119,00 €

NEKO / KENZO / K1X55
Adjustable LED Spotlight

9W | CRI90 CRI80 | 2700K 3000K 4000K | 18° 24° 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WB
						24°	850lm	700lm	K1M-9272409N-WB
						36°	850lm	700lm	K1M-9273609N-WB
					3000K	18°	950lm	720lm	K1M-9301809N-WB
						24°	950lm	720lm	K1M-9302409N-WB
						36°	950lm	720lm	K1M-9303609N-WB
					4000K	18°	1050lm	800lm	K1M-9401809N-WB
						24°	1050lm	800lm	K1M-9402409N-WB
						36°	1050lm	800lm	K1M-9403609N-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WW
						24°	850lm	700lm	K1M-9272409N-WW
						36°	850lm	700lm	K1M-9273609N-WW
					3000K	18°	950lm	720lm	K1M-9301809N-WW
						24°	950lm	720lm	K1M-9302409N-WW
						36°	950lm	720lm	K1M-9303609N-WW
					4000K	18°	1050lm	800lm	K1M-9401809N-WW
						24°	1050lm	800lm	K1M-9402409N-WW
						36°	1050lm	800lm	K1M-9403609N-WW

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WG
						24°	850lm	700lm	K1M-9272409N-WG
						36°	850lm	700lm	K1M-9273609N-WG
					3000K	18°	950lm	720lm	K1M-9301809N-WG
						24°	950lm	720lm	K1M-9302409N-WG
						36°	950lm	720lm	K1M-9303609N-WG
					4000K	18°	1050lm	800lm	K1M-9401809N-WG
						24°	1050lm	800lm	K1M-9402409N-WG
						36°	1050lm	800lm	K1M-9403609N-WG

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	139,00 €
ON-OFF	149,00 €
Phase Dim	169,00 €
DALI Dim	199,00 €

NEKO / KENZO / K1X70
Adjustable LED Spotlight

13W CRI90 2700K
18W CRI80 3000K
4000K

15° 25° 30°

CITIZEN 50,000h@L80B10

UGR < 19

IP 20

5 YEARS GUARANTEE

CB CE

100 0-90° 350°



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WB
						25°	1400lm	1100lm	K1L1-9272513N-WB
						30°	1400lm	1100lm	K1L1-9273013N-WB
					3000K	15°	1500lm	1200lm	K1L1-9301513N-WB
						25°	1500lm	1200lm	K1L1-9302513N-WB
						30°	1500lm	1200lm	K1L1-9303013N-WB
					4000K	15°	1600lm	1300lm	K1L1-9401513N-WB
						25°	1600lm	1300lm	K1L1-9402513N-WB
						30°	1600lm	1300lm	K1L1-9403013N-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WB
						25°	1800lm	1500lm	K1L2-9272518N-WB
						30°	1800lm	1500lm	K1L2-9273018N-WB
					3000K	15°	2000lm	1600lm	K1L2-9301518N-WB
						25°	2000lm	1600lm	K1L2-9302518N-WB
						30°	2000lm	1600lm	K1L2-9303018N-WB
					4000K	15°	2200lm	1700lm	K1L2-9401518N-WB
						25°	2200lm	1700lm	K1L2-9402518N-WB
						30°	2200lm	1700lm	K1L2-9403018N-WB

13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WW
						25°	1400lm	1100lm	K1L1-9272513N-WW
						30°	1400lm	1100lm	K1L1-9273013N-WW
					3000K	15°	1500lm	1200lm	K1L1-9301513N-WW
						25°	1500lm	1200lm	K1L1-9302513N-WW
						30°	1500lm	1200lm	K1L1-9303013N-WW
					4000K	15°	1600lm	1300lm	K1L1-9401513N-WW
						25°	1600lm	1300lm	K1L1-9402513N-WW
						30°	1600lm	1300lm	K1L1-9403013N-WW
18 W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WW
						25°	1800lm	1500lm	K1L2-9272518N-WW
						30°	1800lm	1500lm	K1L2-9273018N-WW
					3000K	15°	2000lm	1600lm	K1L2-9301518N-WW
						25°	2000lm	1600lm	K1L2-9302518N-WW
						30°	2000lm	1600lm	K1L2-9303018N-WW
					4000K	15°	2200lm	1700lm	K1L2-9401518N-WW
						25°	2200lm	1700lm	K1L2-9402518N-WW
						30°	2200lm	1700lm	K1L2-9403018N-WW

13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WG
						25°	1400lm	1100lm	K1L1-9272513N-WG
						30°	1400lm	1100lm	K1L1-9273013N-WG
					3000K	15°	1500lm	1200lm	K1L1-9301513N-WG
						25°	1500lm	1200lm	K1L1-9302513N-WG
						30°	1500lm	1200lm	K1L1-9303013N-WG
					4000K	15°	1600lm	1300lm	K1L1-9401513N-WG
						25°	1600lm	1300lm	K1L1-9402513N-WG
						30°	1600lm	1300lm	K1L1-9403013N-WG
18 W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WG
						25°	1800lm	1500lm	K1L2-9272518N-WG
						30°	1800lm	1500lm	K1L2-9273018N-WG
					3000K	15°	2000lm	1600lm	K1L2-9301518N-WG
						25°	2000lm	1600lm	K1L2-9302518N-WG
						30°	2000lm	1600lm	K1L2-9303018N-WG
					4000K	15°	2200lm	1700lm	K1L2-9401518N-WG
						25°	2200lm	1700lm	K1L2-9402518N-WG
						30°	2200lm	1700lm	K1L2-9403018N-WG

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	179,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

NEKO / FUSION / FF1
Fixed LED Downlight

2W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

37x37 | 1-25mm Ceiling Thickness | 60 | 45x45

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	160lm	FF1-8272402N-WB
						40°	220lm	160lm	FF1-8274002N-WB
					3000K	24°	250lm	170lm	FF1-8302402N-WB
						40°	250lm	170lm	FF1-8304002N-WB
					4000K	24°	280lm	180lm	FF1-8402402N-WB
						40°	280lm	180lm	FF1-8404002N-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	160lm	FF1-8272402N-BB
						40°	220lm	160lm	FF1-8274002N-BB
					3000K	24°	250lm	170lm	FF1-8302402N-BB
						40°	250lm	170lm	FF1-8304002N-BB
					4000K	24°	280lm	180lm	FF1-8402402N-BB
						40°	280lm	180lm	FF1-8404002N-BB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	180lm	FF1-8272402N-WS
						40°	220lm	180lm	FF1-8274002N-WS
					3000K	24°	250lm	200lm	FF1-8302402N-WS
						40°	250lm	200lm	FF1-8304002N-WS
					4000K	24°	280lm	220lm	FF1-8402402N-WS
						40°	280lm	220lm	FF1-8404002N-WS

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	180lm	FF1-8272402N-BS
						40°	220lm	180lm	FF1-8274002N-BS
					3000K	24°	250lm	200lm	FF1-8302402N-BS
						40°	250lm	200lm	FF1-8304002N-BS
					4000K	24°	280lm	220lm	FF1-8402402N-BS
						40°	280lm	220lm	FF1-8404002N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

ohne / none	49,00 €
ON-OFF	59,00 €
DALI Dim	89,00 €

NEKO / FUSION / FF2
Fixed LED Downlight

4W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

62x37 | 1-25mm Ceiling Thickness | 60 | 70x45

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404N-WB
						40°	450lm	330lm	FF2-8274004N-WB
					3000K	24°	500lm	350lm	FF2-8302404N-WB
						40°	500lm	350lm	FF2-8304004N-WB
					4000K	24°	550lm	380lm	FF2-8402404N-WB
						40°	550lm	380lm	FF2-8404004N-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404N-BB
						40°	450lm	330lm	FF2-8274004N-BB
					3000K	24°	500lm	350lm	FF2-8302404N-BB
						40°	500lm	350lm	FF2-8304004N-BB
					4000K	24°	550lm	380lm	FF2-8402404N-BB
						40°	550lm	380lm	FF2-8404004N-BB

ohne / none	69,00 €
ON-OFF	79,00 €
Phase Dim	109,00 €
DALI Dim	119,00 €

NEKO / FUSION / FF2
Fixed LED Downlight

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	380lm	FF2-8272404N-WS
						40°	450lm	380lm	FF2-8274004N-WS
					3000K	24°	500lm	400lm	FF2-8302404N-WS
						40°	500lm	400lm	FF2-8304004N-WS
					4000K	24°	550lm	440lm	FF2-8402404N-WS
						40°	550lm	440lm	FF2-8404004N-WS

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	380lm	FF2-8272404N-BS
						40°	450lm	380lm	FF2-8274004N-BS
					3000K	24°	500lm	400lm	FF2-8302404N-BS
						40°	500lm	400lm	FF2-8304004N-BS
					4000K	24°	550lm	440lm	FF2-8402404N-BS
						40°	550lm	440lm	FF2-8404004N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	69,00 €
ON-OFF	79,00 €
Phase Dim	109,00 €
DALI Dim	119,00 €

NEKO / FUSION / FF3
Fixed LED Downlight

7W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB CE | Intertek

90x37 | 1-25mm Ceiling Thickness | 60 98x45

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407N-WB
						40°	700lm	500lm	FF3-8274007N-WB
					3000K	24°	750lm	550lm	FF3-8302407N-WB
						40°	750lm	550lm	FF3-8304007N-WB
					4000K	24°	800lm	600lm	FF3-8402407N-WB
						40°	800lm	600lm	FF3-8404007N-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407N-BB
						40°	700lm	500lm	FF3-8274007N-BB
					3000K	24°	750lm	550lm	FF3-8302407N-BB
						40°	750lm	550lm	FF3-8304007N-BB
					4000K	24°	800lm	600lm	FF3-8402407N-BB
						40°	800lm	600lm	FF3-8404007N-BB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407N-WS
						40°	700lm	550lm	FF3-8274007N-WS
					3000K	24°	750lm	600lm	FF3-8302407N-WS
						40°	750lm	600lm	FF3-8304007N-WS
					4000K	24°	800lm	650lm	FF3-8402407N-WS
						40°	800lm	650lm	FF3-8404007N-WS

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407N-BS
						40°	700lm	550lm	FF3-8274007N-BS
					3000K	24°	750lm	600lm	FF3-8302407N-BS
						40°	750lm	600lm	FF3-8304007N-BS
					4000K	24°	800lm	650lm	FF3-8402407N-BS
						40°	800lm	650lm	FF3-8404007N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI Dim	149,00 €

NEKO / FUSION / FX4
Fixed LED Downlight

9W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | Intertek

65x65 | 1-25mm Ceiling Thickness | 60 | 75x75

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	670lm	FX4-8272409N-WB
						40°	850lm	670lm	FX4-8274009N-WB
					3000K	24°	900lm	700lm	FX4-8302409N-WB
						40°	900lm	700lm	FX4-8304009N-WB
					4000K	24°	1000lm	750lm	FX4-8402409N-WB
						40°	1000lm	750lm	FX4-8404009N-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	670lm	FX4-8272409N-BB
						40°	850lm	670lm	FX4-8274009N-BB
					3000K	24°	900lm	700lm	FX4-8302409N-BB
						40°	900lm	700lm	FX4-8304009N-BB
					4000K	24°	1000lm	750lm	FX4-8402409N-BB
						40°	1000lm	750lm	FX4-8404009N-BB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	700lm	FX4-8272409N-WS
						40°	850lm	700lm	FX4-8274009N-WS
					3000K	24°	900lm	750lm	FX4-8302409N-WS
						40°	900lm	750lm	FX4-8304009N-WS
					4000K	24°	1000lm	800lm	FX4-8402409N-WS
						40°	1000lm	800lm	FX4-8404009N-WS



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	700lm	FX4-8272409N-BS
						40°	850lm	700lm	FX4-8274009N-BS
					3000K	24°	900lm	750lm	FX4-8302409N-BS
						40°	900lm	750lm	FX4-8304009N-BS
					4000K	24°	1000lm	800lm	FX4-8402409N-BS
						40°	1000lm	800lm	FX4-8404009N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI Dim	159,00 €

NEKO / FUSION / FF5
Fixed LED Downlight

11W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | Intertek

144x37 | 1-25mm Ceiling Thickness | 60 | 152.5x45

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411N-WB
						40°	1200lm	850lm	FF5-8274011N-WB
					3000K	24°	1300lm	900lm	FF5-8302411N-WB
						40°	1300lm	900lm	FF5-8304011N-WB
					4000K	24°	1400lm	950lm	FF5-8402411N-WB
						40°	1400lm	950lm	FF5-8404011N-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411N-BB
						40°	1200lm	850lm	FF5-8274011N-BB
					3000K	24°	1300lm	900lm	FF5-8302411N-BB
						40°	1300lm	900lm	FF5-8304011N-BB
					4000K	24°	1400lm	950lm	FF5-8402411N-BB
						40°	1400lm	950lm	FF5-8404011N-BB

ohne / none	119,00 €
ON-OFF	139,00 €
Phase Dim	149,00 €
DALI Dim	169,00 €

NEKO / FUSION / FF5
Fixed LED Downlight



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411N-WS
						40°	1200lm	950lm	FF5-8274011N-WS
					3000K	24°	1300lm	1000lm	FF5-8302411N-WS
						40°	1300lm	1000lm	FF5-8304011N-WS
					4000K	24°	1400lm	1100lm	FF5-8402411N-WS
						40°	1400lm	1100lm	FF5-8404011N-WS

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411N-BS
						40°	1200lm	950lm	FF5-8274011N-BS
					3000K	24°	1300lm	1000lm	FF5-8302411N-BS
						40°	1300lm	1000lm	FF5-8304011N-BS
					4000K	24°	1400lm	1100lm	FF5-8402411N-BS
						40°	1400lm	1100lm	FF5-8404011N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	119,00 €
ON-OFF	139,00 €
Phase Dim	149,00 €
DALI Dim	169,00 €

NEKO / FUSION / FF10
Fixed LED Downlight

22W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

282x37 | 1-25mm Ceiling Thickness | 60 | 290x45



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FF10-8272422N-WB
						40°	2400lm	1600lm	FF10-8274022N-WB
					3000K	24°	2600lm	1800lm	FF10-8302422N-WB
						40°	2600lm	1800lm	FF10-8304022N-WB
					4000K	24°	2800lm	2000lm	FF10-8402422N-WB
						40°	2800lm	2000lm	FF10-8404022N-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FF10-8272422N-BB
						40°	2400lm	1600lm	FF10-8274022N-BB
					3000K	24°	2600lm	1800lm	FF10-8302422N-BB
						40°	2600lm	1800lm	FF10-8304022N-BB
					4000K	24°	2800lm	2000lm	FF10-8402422N-BB
						40°	2800lm	2000lm	FF10-8404022N-BB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FF10-8272422N-WS
						40°	2400lm	2000lm	FF10-8274022N-WS
					3000K	24°	2600lm	2100lm	FF10-8302422N-WS
						40°	2600lm	2100lm	FF10-8304022N-WS
					4000K	24°	2800lm	2300lm	FF10-8402422N-WS
						40°	2800lm	2300lm	FF10-8404022N-WS



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FF10-8272422N-BS
						40°	2400lm	2000lm	FF10-8274022N-BS
					3000K	24°	2600lm	2100lm	FF10-8302422N-BS
						40°	2600lm	2100lm	FF10-8304022N-BS
					4000K	24°	2800lm	2300lm	FF10-8402422N-BS
						40°	2800lm	2300lm	FF10-8404022N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI Dim	299,00 €

NEKO / FUSION / FFT5
Fixed Trimless LED Downlight

11W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB CE

152x44 | 1-25mm Ceiling Thickness | 62.5 | 36 | 150x41

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FFT5-8272411N-WB
						40°	1200lm	850lm	FFT5-8274011N-WB
					3000K	24°	1300lm	900lm	FFT5-8302411N-WB
						40°	1300lm	900lm	FFT5-8304011N-WB
					4000K	24°	1400lm	950lm	FFT5-8402411N-WB
						40°	1400lm	950lm	FFT5-8404011N-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FFT5-8272411N-BB
						40°	1200lm	850lm	FFT5-8274011N-BB
					3000K	24°	1300lm	900lm	FFT5-8302411N-BB
						40°	1300lm	900lm	FFT5-8304011N-BB
					4000K	24°	1400lm	950lm	FFT5-8402411N-BB
						40°	1400lm	950lm	FFT5-8404011N-BB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FFT5-8272411N-WS
						40°	1200lm	950lm	FFT5-8274011N-WS
					3000K	24°	1300lm	1000lm	FFT5-8302411N-WS
						40°	1300lm	1000lm	FFT5-8304011N-WS
					4000K	24°	1400lm	1100lm	FFT5-8402411N-WS
						40°	1400lm	1100lm	FFT5-8404011N-WS



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FFT5-8272411N-BS
						40°	1200lm	950lm	FFT5-8274011N-BS
					3000K	24°	1300lm	1000lm	FFT5-8302411N-BS
						40°	1300lm	1000lm	FFT5-8304011N-BS
					4000K	24°	1400lm	1100lm	FFT5-8402411N-BS
						40°	1400lm	1100lm	FFT5-8404011N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	179,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €

NEKO / FUSION / FFT10
Fixed Trimless LED Downlight

22W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB CE

290x44 | 1-25mm Ceiling Thickness | 62.5 | 36 | 286.5x41



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FFTA-8272422N-WB
						40°	2400lm	1600lm	FFTA-8274022N-WB
					3000K	24°	2600lm	1800lm	FFTA-8302422N-WB
						40°	2600lm	1800lm	FFTA-8304022N-WB
					4000K	24°	2800lm	2000lm	FFTA-8402422N-WB
						40°	2800lm	2000lm	FFTA-8404022N-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FFTA-8272422N-BB
						40°	2400lm	1600lm	FFTA-8274022N-BB
					3000K	24°	2600lm	1800lm	FFTA-8302422N-BB
						40°	2600lm	1800lm	FFTA-8304022N-BB
					4000K	24°	2800lm	2000lm	FFTA-8402422N-BB
						40°	2800lm	2000lm	FFTA-8404022N-BB

ohne / none	339,00 €
ON-OFF	359,00 €
Phase Dim	369,00 €
DALI Dim	399,00 €

NEKO / FUSION / FFT10
Fixed Trimless LED Downlight



22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FFTA-8272422N-WS
						40°	2400lm	2000lm	FFTA-8274022N-WS
					3000K	24°	2600lm	2100lm	FFTA-8302422N-WS
						40°	2600lm	2100lm	FFTA-8304022N-WS
					4000K	24°	2800lm	2300lm	FFTA-8402422N-WS
						40°	2800lm	2300lm	FFTA-8404022N-WS



22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FFTA-8272422N-BS
						40°	2400lm	2000lm	FFTA-8274022N-BS
					3000K	24°	2600lm	2100lm	FFTA-8302422N-BS
						40°	2600lm	2100lm	FFTA-8304022N-BS
					4000K	24°	2800lm	2300lm	FFTA-8402422N-BS
						40°	2800lm	2300lm	FFTA-8404022N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	339,00 €
ON-OFF	359,00 €
Phase Dim	369,00 €
DALI Dim	399,00 €

NEKO / FUSION / FA5
Adjustable LED Downlight

11W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek | 160x53 | 1-25mm Ceiling Thickness | 60 | 171x70

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FA5-8272411N-WB
						40°	1200lm	850lm	FA5-8274011N-WB
					3000K	24°	1300lm	900lm	FA5-8302411N-WB
						40°	1300lm	900lm	FA5-8304011N-WB
					4000K	24°	1400lm	950lm	FA5-8402411N-WB
						40°	1400lm	950lm	FA5-8404011N-WB

11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FA5-8272411N-BB
						40°	1200lm	850lm	FA5-8274011N-BB
					3000K	24°	1300lm	900lm	FA5-8302411N-BB
						40°	1300lm	900lm	FA5-8304011N-BB
					4000K	24°	1400lm	950lm	FA5-8402411N-BB
						40°	1400lm	950lm	FA5-8404011N-BB



11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FA5-8272411N-WS
						40°	1200lm	950lm	FA5-8274011N-WS
					3000K	24°	1300lm	1000lm	FA5-8302411N-WS
						40°	1300lm	1000lm	FA5-8304011N-WS
					4000K	24°	1400lm	1100lm	FA5-8402411N-WS
						40°	1400lm	1100lm	FA5-8404011N-WS



11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FA5-8272411N-BS
						40°	1200lm	950lm	FA5-8274011N-BS
					3000K	24°	1300lm	1000lm	FA5-8302411N-BS
						40°	1300lm	1000lm	FA5-8304011N-BS
					4000K	24°	1400lm	1100lm	FA5-8402411N-BS
						40°	1400lm	1100lm	FA5-8404011N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	159,00 €
ON-OFF	179,00 €
Phase Dim	189,00 €
DALI Dim	209,00 €

NEKO / FUSION / FA10
Adjustable LED Downlight

22W | CRI90 CRI80 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

298x53 | 1-25mm Ceiling Thickness | 60 | 309x70



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FA10-8272422N-WB
						40°	2400lm	1600lm	FA10-8274022N-WB
					3000K	24°	2600lm	1800lm	FA10-8302422N-WB
						40°	2600lm	1800lm	FA10-8304022N-WB
					4000K	24°	2800lm	2000lm	FA10-8402422N-WB
						40°	2800lm	2000lm	FA10-8404022N-WB



22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FA10-8272422N-BB
						40°	2400lm	1600lm	FA10-8274022N-BB
					3000K	24°	2600lm	1800lm	FA10-8302422N-BB
						40°	2600lm	1800lm	FA10-8304022N-BB
					4000K	24°	2800lm	2000lm	FA10-8402422N-BB
						40°	2800lm	2000lm	FA10-8404022N-BB



22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FA10-8272422N-WS
						40°	2400lm	2000lm	FA10-8274022N-WS
					3000K	24°	2600lm	2100lm	FA10-8302422N-WS
						40°	2600lm	2100lm	FA10-8304022N-WS
					4000K	24°	2800lm	2300lm	FA10-8402422N-WS
						40°	2800lm	2300lm	FA10-8404022N-WS



22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FA10-8272422N-BS
						40°	2400lm	2000lm	FA10-8274022N-BS
					3000K	24°	2600lm	2100lm	FA10-8302422N-BS
						40°	2600lm	2100lm	FA10-8304022N-BS
					4000K	24°	2800lm	2300lm	FA10-8402422N-BS
						40°	2800lm	2300lm	FA10-8404022N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	289,00 €
ON-OFF	309,00 €
Phase Dim	319,00 €
DALI Dim	349,00 €

NEKO / FUSION / FW5
Wall Washer LED Downlight

11W | CRI90 CRI80 | 2700K 3000K 4000K | OSRAM 50,000h@L80B10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | Intertek

144x37 | 1-25mm Ceiling Thickness | 60 | 152.5x45



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	WW	1200lm	550lm	FW5-827WW11N-WM
					3000K	WW	1300lm	600lm	FW5-830WW11N-WM
					4000K	WW	1400lm	650lm	FW5-840WW11N-WM

11 W	13 W	15 V	700 mA	80	2700K	WW	1200lm	550lm	FW5-827WW11N-BM
					3000K	WW	1300lm	600lm	FW5-830WW11N-BM
					4000K	WW	1400lm	650lm	FW5-840WW11N-BM

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	129,00 €
ON-OFF	149,00 €
Phase Dim	159,00 €
DALI Dim	179,00 €

Trimless available

Trimless code for FW5-830WW11N-WM
FWT5-830WW11N-WM

152x44 | 62.5 | 36 | 150x41

ohne / none	209,00 €
ON-OFF	229,00 €
Phase Dim	239,00 €
DALI Dim	259,00 €

NEKO / FUSION / FW10
Wall Washer LED Downlight

22W | CRI90 CRI80 | 2700K 3000K 4000K | OSRAM 50,000h@L80B10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | Intertek

282x37 | 1-25mm Ceiling Thickness | 60 | 290x45



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22N-WM
					3000K	WW	2600lm	1200lm	FW10-830WW22N-WM
					4000K	WW	2800lm	1300lm	FW10-840WW22N-WM



22 W	24 W	30 V	700 mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22N-BM
					3000K	WW	2600lm	1200lm	FW10-830WW22N-BM
					4000K	WW	2800lm	1300lm	FW10-840WW22N-BM

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	219,00 €
ON-OFF	239,00 €
Phase Dim	249,00 €
DALI Dim	269,00 €

Trimless available

Trimless code for FW10-830WW22N-WM
FWTA-830WW22N-WM

290x44 | 62.5 | 36 | 286.5x41

ohne / none	369,00 €
ON-OFF	399,00 €
Phase Dim	409,00 €
DALI Dim	429,00 €

NEKO / FUSION / FG5
General LED Downlight

11W | CRI90 CRI80 | 2700K 3000K 4000K | OSRAM 50,000h@L80B10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | Intertek

144x37 | 1-25mm Ceiling Thickness | 60 | 152.5x45



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11	W	13 W	15 V	700 mA	80	2700K	75°	1200lm	380lm	FG5-8277511N-WB
						3000K	75°	1300lm	400lm	FG5-8307511N-WB
						4000K	75°	1400lm	450lm	FG5-8407511N-WB



11	W	13 W	15 V	700 mA	80	2700K	75°	1200lm	350lm	FG5-8277511N-BB
						3000K	75°	1300lm	400lm	FG5-8307511N-BB
						4000K	75°	1400lm	450lm	FG5-8407511N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	109,00 €
ON-OFF	129,00 €
Phase Dim	139,00 €
DALI Dim	159,00 €

Trimless available

Trimless code for FG5-8307511N-WB
FGT5-8307511N-WB

152x44 | 36 | 62.5 | 150x41

ohne / none	159,00 €
ON-OFF	189,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

NEKO / FUSION / FG10
General LED Downlight

22W | CRI90 CRI80 | 2700K 3000K 4000K | OSRAM 50,000h@L80B10 | IP 20 | 5 YEARS GUARANTEE | CB | CE | Intertek

282x37 | 1-25mm Ceiling Thickness | 60 | 290x45



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22	W	24 W	30 V	700 mA	80	2700K	75°	2400lm	850lm	FG10-8277522N-WB
						3000K	75°	2600lm	900lm	FG10-8307522N-WB
						4000K	75°	2800lm	950lm	FG10-8407522N-WB



22	W	24 W	30 V	700 mA	80	2700K	75°	2400lm	850lm	FG10-8277522N-BB
						3000K	75°	2600lm	900lm	FG10-8307522N-BB
						4000K	75°	2800lm	950lm	FG10-8407522N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	189,00 €
ON-OFF	209,00 €
Phase Dim	219,00 €
DALI Dim	239,00 €

Trimless available



Trimless code for FG10-8307522N-WB
FGTA-8307522N-WB

290x44 | 36 | 62.5 | 286.5x41

ohne / none	289,00 €
ON-OFF	319,00 €
Phase Dim	329,00 €
DALI Dim	349,00 €

NEKO / FUSION / FS1
Adjustable Spotlight

2W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

62x37 | 1-25mm Ceiling Thickness | 60 | 70x45





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2 W	3 W	3 V	700 mA	80	2700K	15°	220lm	160lm	FS1-8271502N-WN
						30°	220lm	160lm	FS1-8273002N-WN
					3000K	15°	250lm	170lm	FS1-8301502N-WN
						30°	250lm	170lm	FS1-8303002N-WN
					4000K	15°	280lm	180lm	FS1-8401502N-WN
						30°	280lm	180lm	FS1-8403002N-WN
2 W	3 W	3 V	700 mA	80	2700K	15°	220lm	160lm	FS1-8271502N-BN
						30°	220lm	160lm	FS1-8273002N-BN
					3000K	15°	250lm	170lm	FS1-8301502N-BN
						30°	250lm	170lm	FS1-8303002N-BN
					4000K	15°	280lm	180lm	FS1-8401502N-BN
						30°	280lm	180lm	FS1-8403002N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

ohne / none	89,00 €
ON-OFF	99,00 €
DALI Dim	129,00 €

NEKO / FUSION / FS2
Adjustable Spotlight

4W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

90x37 | 1-25mm Ceiling Thickness | 60 | 98x45



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	15°	450lm	330lm	FS2-8271504N-WN
						30°	450lm	330lm	FS2-8273004N-WN
					3000K	15°	500lm	350lm	FS2-8301504N-WN
						30°	500lm	350lm	FS2-8303004N-WN
					4000K	15°	550lm	400lm	FS2-8401504N-WN
						30°	550lm	400lm	FS2-8403004N-WN
4 W	6 W	6 V	700 mA	80	2700K	15°	450lm	330lm	FS2-8271504N-BN
						30°	450lm	330lm	FS2-8273004N-BN
					3000K	15°	500lm	350lm	FS2-8301504N-BN
						30°	500lm	350lm	FS2-8303004N-BN
					4000K	15°	550lm	400lm	FS2-8401504N-BN
						30°	550lm	400lm	FS2-8403004N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	149,00 €
ON-OFF	159,00 €
Phase Dim	189,00 €
DALI Dim	199,00 €

NEKO / FUSION / FS3
Adjustable Spotlight

7W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

144x37 | 1-25mm Ceiling Thickness | 60 | 152.5x45

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	15°	700lm	500lm	FS3-8271507N-WN
						30°	700lm	500lm	FS3-8273007N-WN
					3000K	15°	750lm	550lm	FS3-8301507N-WN
						30°	750lm	550lm	FS3-8303007N-WN
					4000K	15°	800lm	600lm	FS3-8401507N-WN
						30°	800lm	600lm	FS3-8403007N-WN

7 W	9 W	9 V	700 mA	80	2700K	15°	700lm	500lm	FS3-8271507N-BN
						30°	700lm	500lm	FS3-8273007N-BN
					3000K	15°	750lm	550lm	FS3-8301507N-BN
						30°	750lm	550lm	FS3-8303007N-BN
					4000K	15°	800lm	600lm	FS3-8401507N-BN
						30°	800lm	600lm	FS3-8402507N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	209,00 €
ON-OFF	229,00 €
Phase Dim	239,00 €
DALI Dim	299,00 €

Trimless available

Trimless code for FS3-8301507N-WN
FST3-8301507N-WN

144x37 | 36 | 60 | 144x37

ohne / none	269,00 €
ON-OFF	289,00 €
Phase Dim	299,00 €
DALI Dim	359,00 €

NEKO / FUSION / FS6
Adjustable Spotlight

13W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

282x37 | 1-25mm Ceiling Thickness | 60 | 290x45



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	18 V	700 mA	80	2700K	15°	1400lm	1000lm	FS6-8271513N-WN
						30°	1400lm	1000lm	FS6-8273013N-WN
					3000K	15°	1500lm	1050lm	FS6-8301513N-WN
						30°	1500lm	1050lm	FS6-8303013N-WN
					4000K	15°	1600lm	1100lm	FS6-8401513N-WN
						30°	1600lm	1100lm	FS6-8403013N-WN

13 W	15 W	18 V	700 mA	80	2700K	15°	1400lm	1000lm	FS6-8271513N-BN
						30°	1400lm	1000lm	FS6-8273013N-BN
					3000K	15°	1500lm	1050lm	FS6-8301513N-BN
						30°	1500lm	1050lm	FS6-8303013N-BN
					4000K	15°	1600lm	1100lm	FS6-8401513N-BN
						30°	1600lm	1100lm	FS6-8403013N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	409,00 €
ON-OFF	429,00 €
Phase Dim	439,00 €
DALI Dim	459,00 €

Trimless available

Trimless code for FS6-8301513N-WN
FST6-8301513N-WN

282x37 | 37 | 60 | 282x37

ohne / none	479,00 €
ON-OFF	499,00 €
Phase Dim	509,00 €
DALI Dim	529,00 €

NEKO / FUSION / FF3-FS1
Adjustable Spotlight

9W | CRI80 CRI90 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

144x37 | 1-25mm Ceiling Thickness | 60 | 152.5x45

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	12 V	700 mA	80	2700K	24°	900lm	650lm	FFS1-8272409N-WB
						40°	900lm	650lm	FFS1-8274009N-WB
					3000K	24°	1000lm	700lm	FFS1-8302409N-WB
						40°	1000lm	700lm	FFS1-8304009N-WB
					4000K	24°	1100lm	800lm	FFS1-8402409N-WB
						40°	1100lm	800lm	FFS1-8404009N-WB

9 W	11 W	12 V	700 mA	80	2700K	24°	900lm	650lm	FFS1-8272409N-BB
						40°	900lm	650lm	FFS1-8274009N-BB
					3000K	24°	1000lm	700lm	FFS1-8302409N-BB
						40°	1000lm	700lm	FFS1-8304009N-BB
					4000K	24°	1100lm	800lm	FFS1-8402409N-BB
						40°	1100lm	800lm	FFS1-8404009N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	169,00 €
ON-OFF	179,00 €
Phase Dim	189,00 €
DALI Dim	219,00 €

Trimless available

Trimless code for FFS1-8304009N-WN
FFS3-8304009N-WN

144x37 | 36 | 60 | 144x37

ohne / none	229,00 €
ON-OFF	239,00 €
Phase Dim	249,00 €
DALI Dim	279,00 €

NEKO / FUSION / FF6-FS2
Adjustable Spotlight

17W | CRI80 CRI90 | 2700K 3000K 4000K | 24° 40° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

282x37 | 1-25mm Ceiling Thickness | 60 | 290x45



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	24 V	700 mA	80	2700K	24°	1900lm	1300lm	FFS2-8272417N-WB
						40°	1900lm	1300lm	FFS2-8274017N-WB
					3000K	24°	2000lm	1400lm	FFS2-8302417N-WB
						40°	2000lm	1400lm	FFS2-8304017N-WB
					4000K	24°	2200lm	1500lm	FFS2-8402417N-WB
						40°	2200lm	1500lm	FFS2-8404017N-WB



17 W	19 W	24 V	700 mA	80	2700K	24°	1900lm	1300lm	FFS2-8272417N-BB
						4°0	1900lm	1300lm	FFS2-8274017N-BB
					3000K	24°	2000lm	1400lm	FFS2-8302417N-BB
						40°	2000lm	1400lm	FFS2-8304017N-BB
					4000K	24°	2200lm	1500lm	FFS2-8402417N-BB
						40°	2200lm	1500lm	FFS2-8404017N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ohne / none	309,00 €
ON-OFF	339,00 €
Phase Dim	349,00 €
DALI Dim	359,00 €

Trimless available



Trimless code for FFS2-8304017N-WN
FFS4-8304017N-WN

282x37 | 37 | 60 | 282x37

ohne / none	389,00 €
ON-OFF	409,00 €
Phase Dim	419,00 €
DALI Dim	439,00 €

NEKO / FUSION / FFE1
Higher Efficiency Version

2W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 24° 40° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

37x37 | 1-25mm Ceiling Thickness | 55 | 45x45

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2 W	3 W	3 V	700 mA	80	2700K	15°	230lm	210lm	FFE1-8271502N-WB
						24°	230lm	210lm	FFE1-8272402N-WB
						40°	230lm	210lm	FFE1-8274002N-WB
						55°	230lm	210lm	FFE1-8275502N-WB
					3000K	15°	250lm	220lm	FFE1-8301502N-WB
						24°	250lm	220lm	FFE1-8302402N-WB
						40°	250lm	220lm	FFE1-8304002N-WB
						55°	250lm	220lm	FFE1-8305502N-WB
					4000K	15°	270lm	240lm	FFE1-8401502N-WB
						24°	270lm	240lm	FFE1-8402402N-WB
						40°	270lm	240lm	FFE1-8404002N-WB
						55°	270lm	240lm	FFE1-8405502N-WB

Black Reflector

2 W	3 W	3 V	700 mA	80	2700K	15°	230lm	210lm	FFE1-8271502N-BB
						24°	230lm	210lm	FFE1-8272402N-BB
						40°	230lm	210lm	FFE1-8274002N-BB
						55°	230lm	210lm	FFE1-8275502N-BB
					3000K	15°	250lm	220lm	FFE1-8301502N-BB
						24°	250lm	220lm	FFE1-8302402N-BB
						40°	250lm	220lm	FFE1-8304002N-BB
						55°	250lm	220lm	FFE1-8305502N-BB
					4000K	15°	270lm	240lm	FFE1-8401502N-BB
						24°	270lm	240lm	FFE1-8402402N-BB
						40°	270lm	240lm	FFE1-8404002N-BB
						55°	270lm	240lm	FFE1-8405502N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

ohne / none	49,00 €
ON-OFF	59,00 €
DALI Dim	89,00 €

NEKO / FUSION / FFE3
Higher Efficiency Version

6W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 24° 40° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

90x37 | 1-25mm Ceiling Thickness | 55 | 97x45

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	9 V	700 mA	80	2700K	15°	700lm	630lm	FFE3-8271506N-WB
						24°	700lm	630lm	FFE3-8272406N-WB
						40°	700lm	630lm	FFE3-8274006N-WB
						55°	700lm	630lm	FFE3-8275506N-WB
					3000K	15°	750lm	660lm	FFE3-8301506N-WB
						24°	750lm	660lm	FFE3-8302406N-WB
						40°	750lm	660lm	FFE3-8304006N-WB
						55°	750lm	660lm	FFE3-8305506N-WB
					4000K	15°	800lm	720lm	FFE3-8401506N-WB
						24°	800lm	720lm	FFE3-8402406N-WB
						40°	800lm	720lm	FFE3-8404006N-WB
						55°	800lm	720lm	FFE3-8405506N-WB



Black Reflector

6 W	8 W	9 V	700 mA	80	2700K	15°	700lm	630lm	FFE3-8271506N-BB
						24°	700lm	630lm	FFE3-8272406N-BB
						40°	700lm	630lm	FFE3-8274006N-BB
						55°	700lm	630lm	FFE3-8275506N-BB
					3000K	15°	750lm	660lm	FFE3-8301506N-BB
						24°	750lm	660lm	FFE3-8302406N-BB
						40°	750lm	660lm	FFE3-8304006N-BB
						55°	750lm	660lm	FFE3-8305506N-BB
					4000K	15°	800lm	720lm	FFE3-8401506N-BB
						24°	800lm	720lm	FFE3-8402406N-BB
						40°	800lm	720lm	FFE3-8404006N-BB
						55°	800lm	720lm	FFE3-8405506N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

ohne / none	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI Dim	149,00 €

NEKO / FUSION / FFE5
Higher Efficiency Version

10W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 24° 40° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | Intertek

144x37 | 1-25mm Ceiling Thickness | 55 152x45

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
10 W	12 W	15 V	700 mA	80	2700K	15°	1200lm	1000lm	FFE5-8271510N-WB
						24°	1200lm	1000lm	FFE5-8272410N-WB
						40°	1200lm	1000lm	FFE5-8274010N-WB
						55°	1200lm	1000lm	FFE5-8275510N-WB
					3000K	15°	1300lm	1100lm	FFE5-8301510N-WB
						24°	1300lm	1100lm	FFE5-8302410N-WB
						40°	1300lm	1100lm	FFE5-8304010N-WB
						55°	1300lm	1100lm	FFE5-8305510N-WB
					4000K	15°	1400lm	1200lm	FFE5-8401510N-WB
						24°	1400lm	1200lm	FFE5-8402410N-WB
						40°	1400lm	1200lm	FFE5-8404010N-WB
						55°	1400lm	1200lm	FFE5-8405510N-WB



Black Reflector

10 W	12 W	15 V	700 mA	80	2700K	15°	1200lm	1000lm	FFE5-8271510N-BB
						24°	1200lm	1000lm	FFE5-8272410N-BB
						40°	1200lm	1000lm	FFE5-8274010N-BB
						55°	1200lm	1000lm	FFE5-8275510N-BB
					3000K	15°	1300lm	1100lm	FFE5-8301510N-BB
						24°	1300lm	1100lm	FFE5-8302410N-BB
						40°	1300lm	1100lm	FFE5-8304010N-BB
						55°	1300lm	1100lm	FFE5-8305510N-BB
					4000K	15°	1400lm	1200lm	FFE5-8401510N-BB
						24°	1400lm	1200lm	FFE5-8402410N-BB
						40°	1400lm	1200lm	FFE5-8404010N-BB
						55°	1400lm	1200lm	FFE5-8405510N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

ohne / none	89,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI Dim	139,00 €

NEKO / FUSION / FFE10
Higher Efficiency Version

20W 26W | CRI90 CRI80 | 2700K 3000K 4000K | 15° 24° 40° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE | Intertek

282x37 | 1-25mm Ceiling Thickness | 55 290x45



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
20 W	29 W	29 V	700 mA	80	2700K	15°	2300lm	2100lm	FFEA-8271520N-WB
						24°	2300lm	2100lm	FFEA-8272420N-WB
						40°	2300lm	2100lm	FFEA-8274020N-WB
						55°	2300lm	2100lm	FFEA-8275520N-WB
					3000K	15°	2500lm	2200lm	FFEA-8301520N-WB
						24°	2500lm	2200lm	FFEA-8302420N-WB
						40°	2500lm	2200lm	FFEA-8304020N-WB
						55°	2500lm	2200lm	FFEA-8305520N-WB
					4000K	15°	2700lm	2400lm	FFEA-8401520N-WB
						24°	2700lm	2400lm	FFEA-8402420N-WB
						40°	2700lm	2400lm	FFEA-8404020N-WB
						55°	2700lm	2400lm	FFEA-8405520N-WB
26 W	29 W	29 V	900 mA	80	2700K	15°	3000lm	2600lm	FFEA-8271526N-WB
						24°	3000lm	2600lm	FFEA-8272426N-WB
						40°	3000lm	2600lm	FFEA-8274026N-WB
						55°	3000lm	2600lm	FFEA-8275526N-WB
					3000K	15°	3200lm	2800lm	FFEA-8301526N-WB
						24°	3200lm	2800lm	FFEA-8302426N-WB
						40°	3200lm	2800lm	FFEA-8304026N-WB
						55°	3200lm	2800lm	FFEA-8305526N-WB
					4000K	15°	3500lm	3000lm	FFEA-8401526N-WB
						24°	3500lm	3000lm	FFEA-8402426N-WB
						40°	3500lm	3000lm	FFEA-8404026N-WB
						55°	3500lm	3000lm	FFEA-8405526N-WB



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
20 W	29 W	29 V	700 mA	80	2700K	15°	2300lm	2100lm	FFEA-8271520N-BB
						24°	2300lm	2100lm	FFEA-8272420N-BB
						40°	2300lm	2100lm	FFEA-8274020N-BB
						55°	2300lm	2100lm	FFEA-8275520N-BB
					3000K	15°	2500lm	2200lm	FFEA-8301520N-BB
						24°	2500lm	2200lm	FFEA-8302420N-BB
						40°	2500lm	2200lm	FFEA-8304020N-BB
						55°	2500lm	2200lm	FFEA-8305520N-BB
					4000K	15°	2700lm	2400lm	FFEA-8401520N-BB
						24°	2700lm	2400lm	FFEA-8402420N-BB
						40°	2700lm	2400lm	FFEA-8404020N-BB
						55°	2700lm	2400lm	FFEA-8405520N-BB
26 W	29 W	29 V	700 mA	80	2700K	15°	3000lm	2600lm	FFEA-8271526N-BB
						24°	3000lm	2600lm	FFEA-8272426N-BB
						40°	3000lm	2600lm	FFEA-8274026N-BB
						55°	3000lm	2600lm	FFEA-8275526N-BB
					3000K	15°	3200lm	2800lm	FFEA-8301526N-BB
						24°	3200lm	2800lm	FFEA-8302426N-BB
						40°	3200lm	2800lm	FFEA-8304026N-BB
						55°	3200lm	2800lm	FFEA-8305526N-BB
					4000K	15°	3500lm	3000lm	FFEA-8401526N-BB
						24°	3500lm	3000lm	FFEA-8402426N-BB
						40°	3500lm	3000lm	FFEA-8404026N-BB
						55°	3500lm	3000lm	FFEA-8405526N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

ohne / none	149,00 €
ON-OFF	169,00 €
Phase Dim	179,00 €
DALI Dim	199,00 €

NEKO / FUSION LINEAR SYSTEM

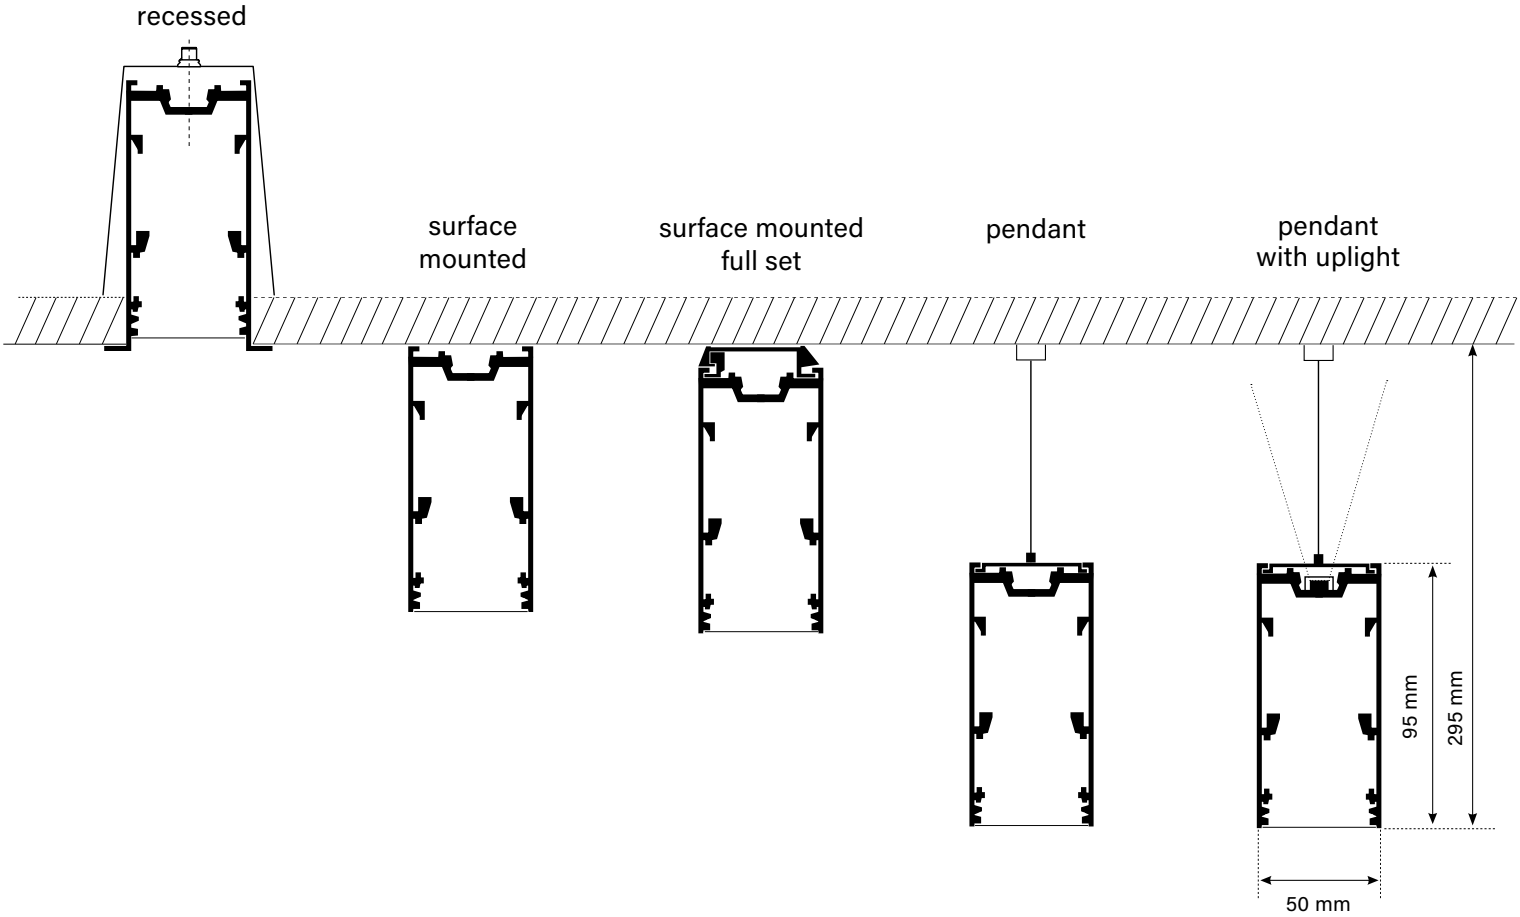

Profil: 59,00 €/lfm

Inserts

FUSION Module
(FF/ FW/ FS/ FG)

Accent Light Module
(300mm)

General Light Module
(600mm)

Wall Washer Module
(1200mm/1800mm)

Spot Light Module
(300mm)

Uplight Module
(1070mm/ 1605mm)

System details

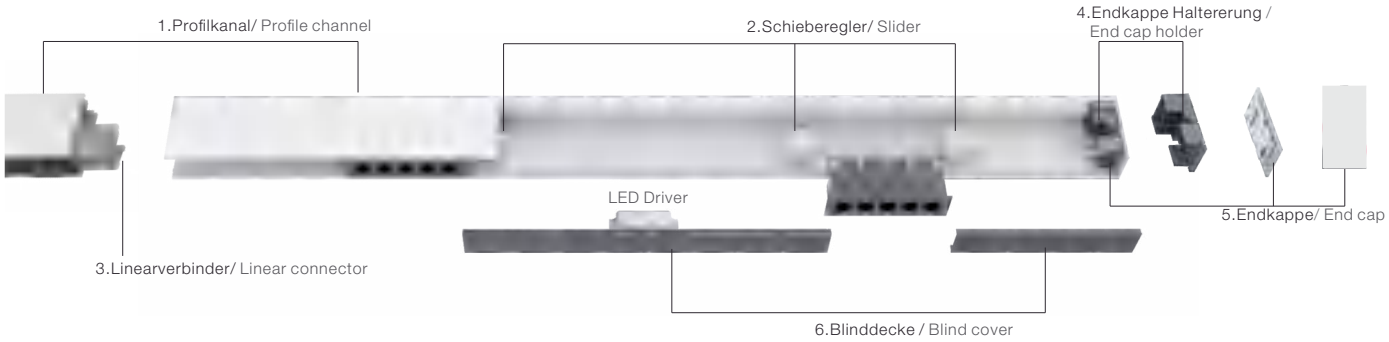

9,00 € Profilverbinder 2pcs	25,00 €/lfm Blind Cover
119,00 € Eckmodul General Light Cover	19,00 €/lfm ← Opal Cover flexible Opal Cover →
89,00 € Eckmodul Blind Cover	 25,00 €/lfm Surface Mounted kit 2pcs/Set
 45,00 € Recessed Mounting 2pcs/Set	49,00 € Surface Mounted Kit Flat 2pcs/Set
45,00 € ← Endkappe Anbau Endkappe Einbau → 2pcs/Set	49,00 € Pendant Kit Ceiling Box in white/black
	9,00 € Slider 2pcs/Set

NEKO / FUSION Linear System

Linear Light module

General Light Module

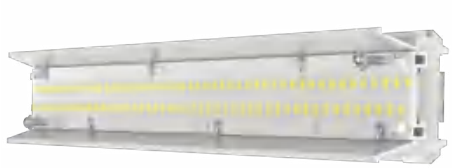

11W | CRI80 CRI90 | 2700K 3000K 4000K | 105° | 50,000h@L80B10 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model		
11 W	13 W	46V	250 mA	80	2700K	105°	1600lm	1200lm	GL600-11W-827-105°	ohne / none	79,00 €
					3000K	105°	1700lm	1300lm	GL600-11W-830-105°		
					4000K	105°	1800lm	1400lm	GL600-11W-840-105°		
				90	2700K	105°	1500lm	1100lm	GL600-11W-927-105°		
					3000K	105°	1600lm	1200lm	GL600-11W-930-105°		
					4000K	105°	1700lm	1300lm	GL600-11W-940-105°		
16 W	18 W	46V	350 mA	80	2700K	105°	2100lm	1700lm	GL600-16W-827-105°		
					3000K	105°	2200lm	1800lm	GL600-16W-830-105°		
					4000K	105°	2400lm	1900lm	GL600-16W-840-105°		
				90	2700K	105°	1900lm	1600lm	GL600-16W-927-105°		
					3000K	105°	2000lm	1700lm	GL600-16W-930-105°		
					4000K	105°	2200lm	1900lm	GL600-16W-940-105°		

Wallwasher Module

22W 32W 48W | CRI80 CRI90 | 2700K 3000K 4000K | 50,000h@L80B10 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model		
22 W	26 W	46V	500 mA	80	2700K	WW	3200lm	1700lm	WW1200-22W-827	ohne / none	129,00 €
					3000K	WW	3400lm	1800lm	WW1200-22W-830		
					4000K	WW	3600lm	1900lm	WW1200-22W-840		
				90	2700K	WW	3000lm	1500lm	WW1200-22W-927		
					3000K	WW	3200lm	1600lm	WW1200-22W-930		
					4000K	WW	3400lm	1700lm	WW1200-22W-940		
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2300lm	WW1200-32W-827	ohne / none	129,00 €
					3000K	WW	4800lm	2500lm	WW1200-32W-830		
					4000K	WW	5000lm	2700lm	WW1200-32W-840		
				90	2700K	WW	4000lm	2000lm	WW1200-32W-927		
					3000K	WW	4200lm	2200lm	WW1200-32W-930		
					4000K	WW	4400lm	2400lm	WW1200-32W-940		
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2500lm	WW1800-32W-827	ohne / none	179,00 €
					3000K	WW	4800lm	2700lm	WW1800-32W-830		
					4000K	WW	5000lm	2900lm	WW1800-32W-840		
				90	2700K	WW	4000lm	2100lm	WW1800-32W-927		
					3000K	WW	4200lm	2300lm	WW1800-32W-930		
					4000K	WW	4400lm	2500lm	WW1800-32W-940		
48 W	52 W	46V	700+350 mA	80	2700K	WW	6200lm	3300lm	WW1800-48W-827	ohne / none	179,00 €
					3000K	WW	6400lm	3500lm	WW1800-48W-830		
					4000K	WW	6600lm	3700lm	WW1800-48W-840		
				90	2700K	WW	5500lm	2900lm	WW1800-48W-927		
					3000K	WW	5700lm	3100lm	WW1800-48W-930		
					4000K	WW	5900lm	3300lm	WW1800-48W-940		

NEKO / FUSION Linear System

Linear Light module

Spot Light Module
SL300-1S-4W

4W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° 55° | CREE 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
4 W	6 W	12V	350 mA	80	2700K	15°	470lm	350lm	SL300-1S-4W-827-15°
						30°	470lm	350lm	SL300-1S-4W-827-30°
						55°	470lm	350lm	SL300-1S-4W-827-55°
					3000K	15°	500lm	380lm	SL300-1S-4W-830-15°
						30°	500lm	380lm	SL300-1S-4W-830-30°
						55°	500lm	380lm	SL300-1S-4W-830-55°
					4000K	15°	550lm	420lm	SL300-1S-4W-840-15°
						30°	550lm	420lm	SL300-1S-4W-840-30°
						55°	550lm	420lm	SL300-1S-4W-840-55°

ohne / none | 99,00 €



Spot Light Module
SL300-2S-8W

8W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° 55° | CREE 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
8 W	10 W	24V	350 mA	80	2700K	15°	850lm	650lm	SL300-2S-8W-827-15°
						30°	850lm	650lm	SL300-2S-8W-827-30°
						55°	850lm	650lm	SL300-2S-8W-827-55°
					3000K	15°	900lm	700lm	SL300-2S-8W-830-15°
						30°	900lm	700lm	SL300-2S-8W-830-30°
						55°	900lm	700lm	SL300-2S-8W-830-55°
					4000K	15°	950lm	750lm	SL300-2S-8W-840-15°
						30°	950lm	750lm	SL300-2S-8W-840-30°
						55°	950lm	750lm	SL300-3S-8W-840-55°

ohne / none | 159,00 €

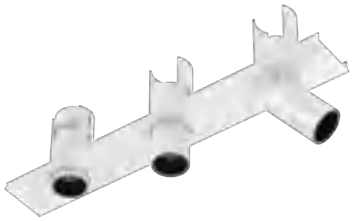

Spot Light Module
SL450-3S-12W

12W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° 55° | CREE 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB CE

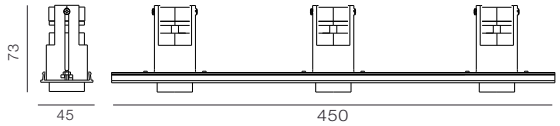

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
12 W	15 W	36V	350 mA	80	2700K	15°	1200lm	950lm	SL450-3S-12W-827-15°
						30°	1200lm	950lm	SL450-3S-12W-827-30°
						55°	1200lm	950lm	SL450-3S-12W-827-55°
					3000K	15°	1300lm	1000lm	SL450-3S-12W-830-15°
						30°	1300lm	1000lm	SL450-3S-12W-830-30°
						55°	1300lm	1000lm	SL450-3S-12W-830-55°
					4000K	15°	1400lm	1100lm	SL450-3S-12W-840-15°
						30°	1400lm	1100lm	SL450-3S-12W-840-30°
						55°	1400lm	1100lm	SL450-3S-12W-840-55°

ohne / none | 219,00 €

NEKO / FUSION Linear System

Linear Light module



Accent Light Module
AL300-13W

13W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° 40° | OSRAM 50,000h@L80B10 | UGR < 19 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model		
13 W	15 W	18 V	700 mA	80	2700K	15°	1300lm	1000lm	AL300-13W-827-15°	ohne / none	99,00 €
						30°	1300lm	1000lm	AL300-13W-827-30°		
						40°	1300lm	1100lm	AL300-13W-827-40°		
					3000K	15°	1400lm	1100lm	AL300-13W-830-15°		
						30°	1400lm	1100lm	AL300-13W-830-30°		
						40°	1400lm	1200lm	AL300-13W-830-40°		
					4000K	15°	1500lm	1200lm	AL300-13W-840-15°		
						30°	1500lm	1200lm	AL300-13W-840-30°		
						40°	1500lm	1300lm	AL300-13W-840-40°		

Up Light Module
UL1200-11W/ UL1800-16W

11W 16W | CRI80 CRI90 | 2700K 3000K 4000K | 110° | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model		
11 W	13 W	46 V	250 mA	80	2700K	110°	1700lm	1500lm	UL1200-11W-827-110°	ohne / none	39,00 €
					3000K	110°	1800lm	1600lm	UL1200-11W-830-110°		
					4000K	110°	1900lm	1700lm	UL1200-11W-840-110°		
16 W	18 W	46 V	350 mA	80	2700K	110°	2300lm	2000lm	UL1800-16W-827-110°	ohne / none	59,00 €
					3000K	110°	2500lm	2200lm	UL1800-16W-830-110°		
					4000K	110°	2700lm	2400lm	UL1800-16W-840-110°		

NEKO / FUSION Linear System

FL1500-2*FF10/FL1200-2*FF5

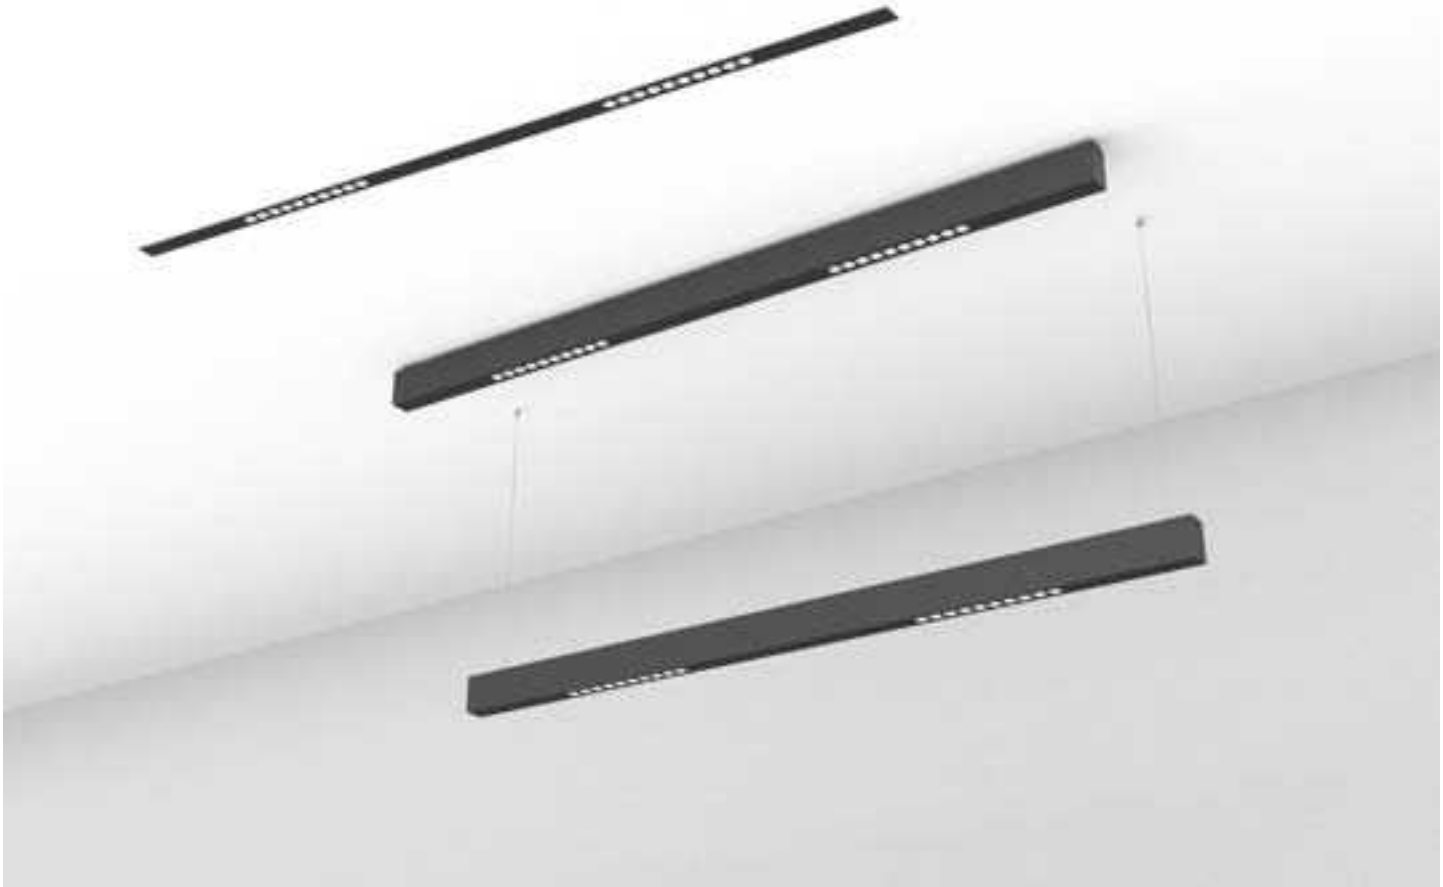

44W CRI80 2700K 3000K 4000K
22W CRI90

24° 40°

OSRAM 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
22 W	26 W	16+16V	700 mA	80	2700K	24°	2400lm	1700lm	1200mm	FL1200(X)Y-2*FF5-22W-827-24°
						40°	2400lm	1700lm	1200mm	FL1200(X)Y-2*FF5-22W-827-40°
					3000K	24°	2600lm	1800lm	1200mm	FL1200(X)Y-2*FF5-22W-830-24°
						40°	2600lm	1800lm	1200mm	FL1200(X)Y-2*FF5-22W-830-40°
					4000K	24°	2800lm	1900lm	1200mm	FL1200(X)Y-2*FF5-22W-840-24°
						40°	2800lm	1900lm	1200mm	FL1200(X)Y-2*FF5-22W-840-40°

Remark: X= P (Pendant) X= S (Surface mounted) X= R (Recessed mounted)
Y= F ON-OFF Y= D DALI Dim

Model	ON-OFF	DALI Dim
FL1200-2*FF5 - Anbau	669,00 €	829,00 €
FL1200-2*FF5 - Pendel	689,00 €	849,00 €

44 W	48 W	31+31V	700 mA	80	2700K	24°	5000lm	3400lm	1500mm	FL1500(X)Y-2*FF10-44W-827-24°
						40°	5000lm	3400lm	1500mm	FL1500(X)Y-2*FF10-44W-827-40°
					3000K	24°	5200lm	3600lm	1500mm	FL1500(X)Y-2*FF10-44W-830-24°
						40°	5200lm	3600lm	1500mm	FL1500(X)Y-2*FF10-44W-830-40°
					4000K	24°	5600lm	3800lm	1500mm	FL1500(X)Y-2*FF10-44W-840-24°
						40°	5600lm	3800lm	1500mm	FL1500(X)Y-2*FF10-44W-840-40°

Remark: X= P (Pendant) X= S (Surface mounted) X= R (Recessed mounted)
Y= F ON-OFF Y= D DALI Dim

Model	ON-OFF	DALI Dim
FL1500-2*FF10 - Anbau	999,00 €	1159,00 €
FL1500-2*FF10 - Pendel	1009,00 €	1169,00 €

DE: EINBAUPROFILE auf Anfrage
EN: Recessed Profile on Request

NEKO / FUSION Linear System

FL1800-GL1800/FL1200-GL1200

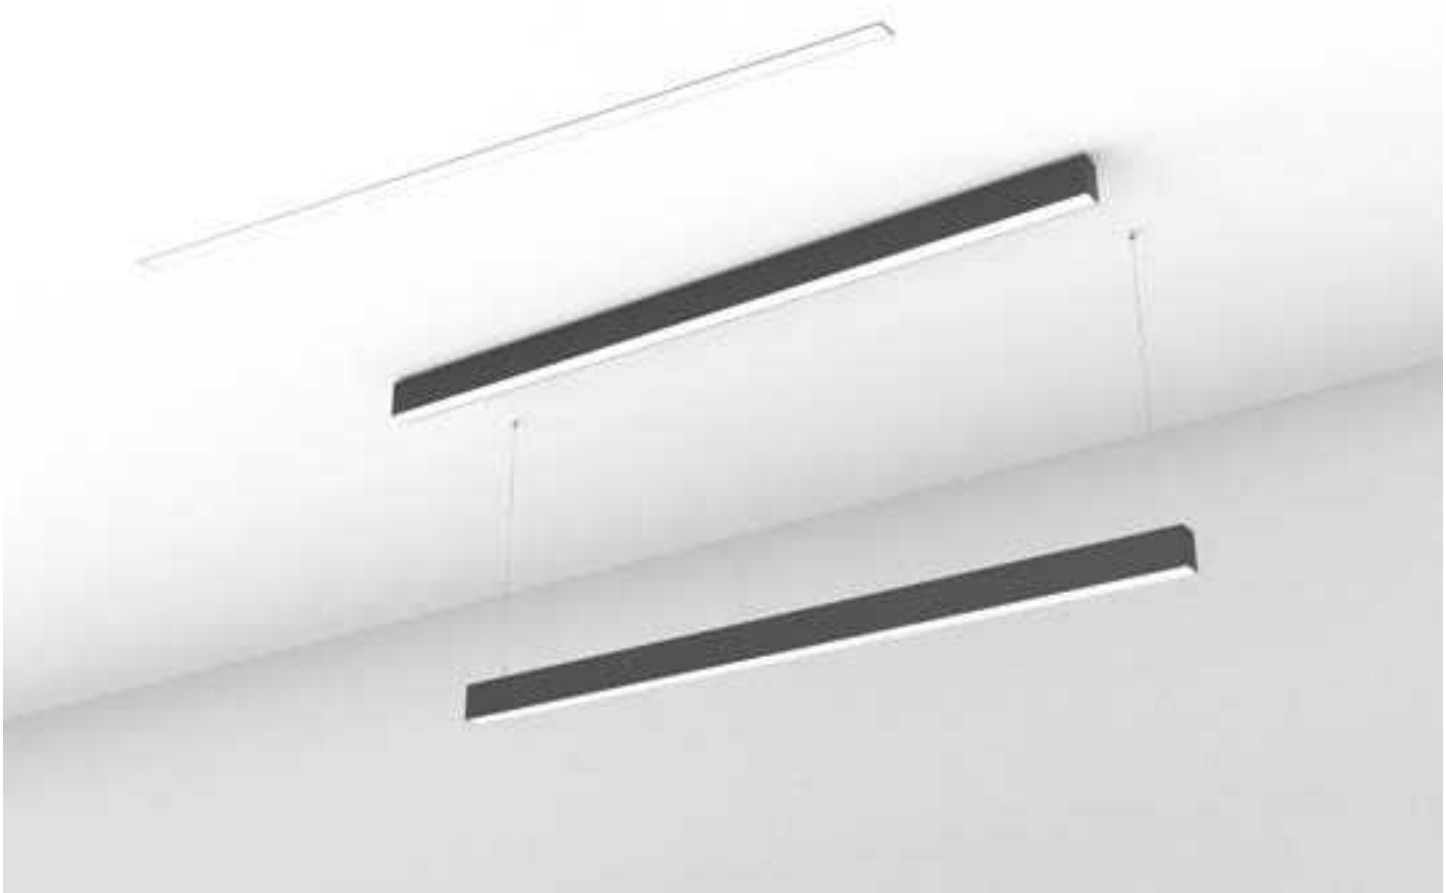

32W CRI80 2700K
22W CRI90 3000K 4000K

105°

50,000h@L80B10

IP 20



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
22 W	26 W	46V	500 mA	80	2700K	105°	3200lm	2300lm	1200mm	FL1200(X)Y-GL1200-22W-827
					3000K	105°	3400lm	2700lm	1200mm	FL1200(X)Y-GL1200-22W-830
					4000K	105°	3600lm	2900lm	1200mm	FL1200(X)Y-GL1200-22W-840
32 W	36 W	46V	700 mA	80	2700K	105°	4200lm	3400lm	1200mm	FL1200(X)Y-GL1200-32W-827
					3000K	105°	4400lm	3600lm	1200mm	FL1200(X)Y-GL1200-32W-830
					4000K	105°	4800lm	3800lm	1200mm	FL1200(X)Y-GL1200-32W-840

Remark: X= P (Pendant) X= S (Surface mounted) X= R (Recessed mounted)
Y= F ON-OFF Y= D DALI Dim

Model	ON-OFF	DALI Dim
FL1200-GL1200 - Anbau	509,00 €	619,00 €
FL1200-GL1200 - Pendel	529,00 €	649,00 €

32 W	36 W	46V	700 mA	80	2700K	105°	4600lm	3400lm	1800mm	FL1800(X)Y-GL1800-32W-827
					3000K	105°	4800lm	3600lm	1800mm	FL1800(X)Y-GL1800-32W-830
					4000K	105°	5000lm	3800lm	1800mm	FL1800(X)Y-GL1800-32W-840
48 W	52 W	46V	700+350 mA	80	2700K	105°	6200lm	5000lm	1800mm	FL1800(X)Y-GL1800-48W-827
					3000K	105°	6400lm	5200lm	1800mm	FL1800(X)Y-GL1800-48W-830
					4000K	105°	7000lm	5500lm	1800mm	FL1800(X)Y-GL1800-48W-840

Remark: X= P (Pendant) X= S (Surface mounted) X= R (Recessed mounted)
Y= F ON-OFF Y= D DALI Dim

Model	ON-OFF	DALI Dim
FL1800-GL1800 - Anbau	679,00 €	789,00 €
FL1800-GL1800 - Pendel	689,00 €	799,00 €

DE: EINBAUPROFILE auf Anfrage
EN: Recessed Profile on Request

NEKO / FUSION Linear System

FL1800-WW1800/FL1200-WW1200

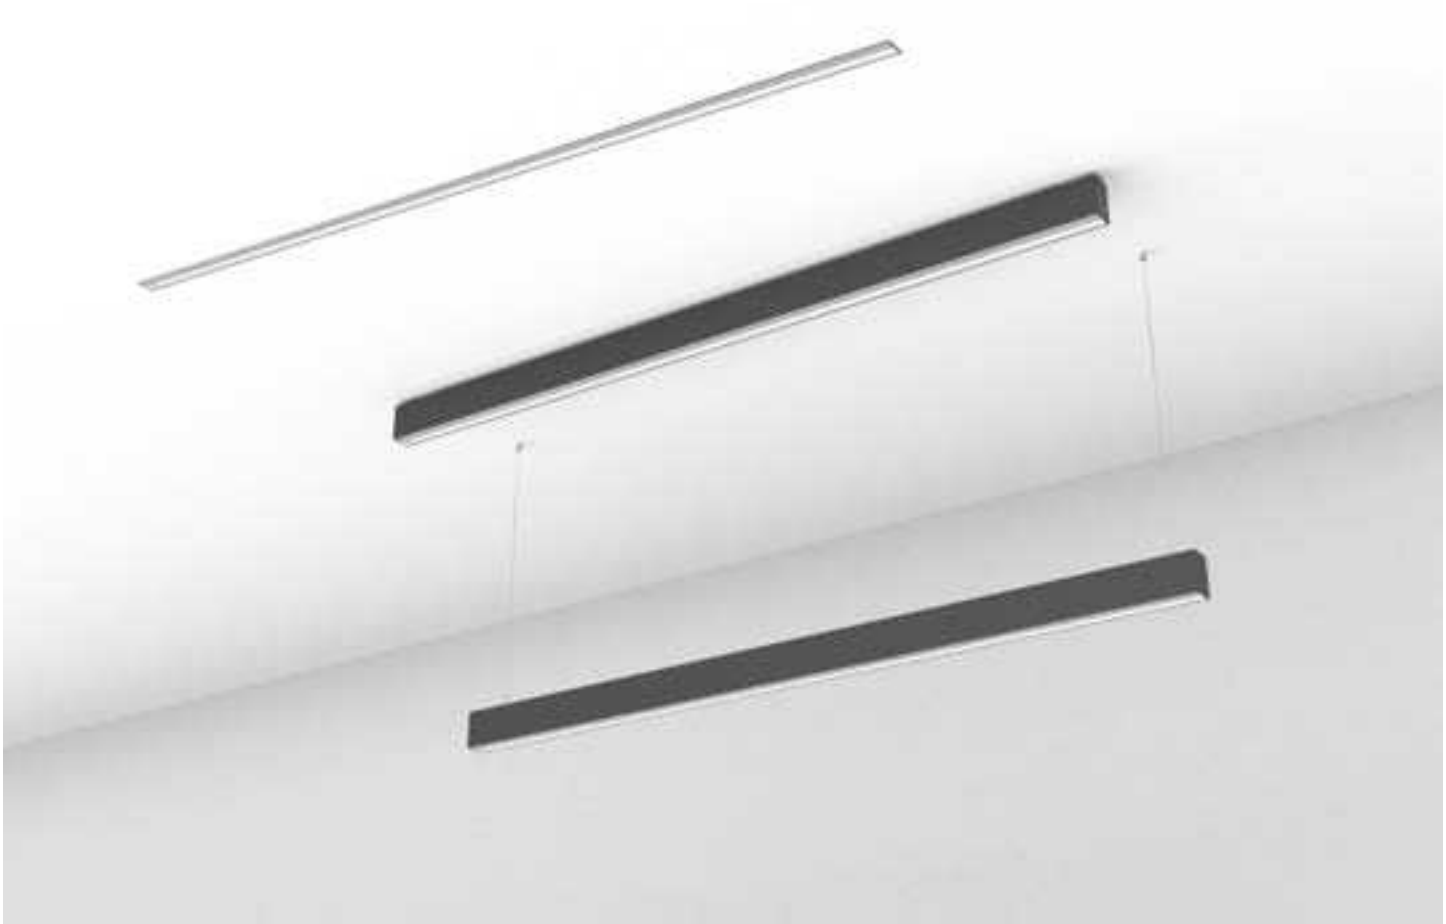

32W CRI80 2700K
22W CRI90 3000K
4000K

50,000h@L80B10

IP 20





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
22 W	26 W	46V	500 mA	80	2700K	WW	3200lm	1700lm	1200mm	FL1200(X)Y-WW1200-22W-827
					3000K	WW	3400lm	1800lm	1200mm	FL1200(X)Y-WW1200-22W-830
					4000K	WW	3600lm	1900lm	1200mm	FL1200(X)Y-WW1200-22W-840
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2300lm	1200mm	FL1200(X)Y-WW1200-32W-827
					3000K	WW	4800lm	2500lm	1200mm	FL1200(X)Y-WW1200-32W-830
					4000K	WW	5000lm	2700lm	1200mm	FL1200(X)Y-WW1200-32W-840

Remark: X= P (Pendant) X= S (Surface mounted) X= R (Recessed mounted)
Y= F ON-OFF Y= D DALI Dim

Model	ON-OFF	DALI Dim
FL1200-WW1200 - Anbau	479,00 €	599,00 €
FL1200-WW1200 - Pendel	509,00 €	619,00 €

32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2500lm	1800mm	FL1800(X)Y-WW1800-32W-827
					3000K	WW	4800lm	2700lm	1800mm	FL1800(X)Y-WW1800-32W-830
					4000K	WW	5000lm	2900lm	1800mm	FL1800(X)Y-WW1800-32W-840
48 W	52 W	46V	700+350 mA	80	2700K	WW	6200lm	3300lm	1800mm	FL1800(X)Y-WW1800-48W-827
					3000K	WW	6400lm	3500lm	1800mm	FL1800(X)Y-WW1800-48W-830
					4000K	WW	6600lm	3700lm	1800mm	FL1800(X)Y-WW1800-48W-840

Remark: X= P (Pendant) X= S (Surface mounted) X= R (Recessed mounted)
Y= F ON-OFF Y= D DALI Dim

Model	ON-OFF	DALI Dim
FL1800-WW1800 - Anbau	619,00 €	729,00 €
FL1800-WW1800 - Pendel	629,00 €	749,00 €

DE: EINBAUPROFILE auf Anfrage
EN: Recessed Profile on Request

NEKO / FUSION Linear System

FL1200-2*AL300/FL1500-2*AL300

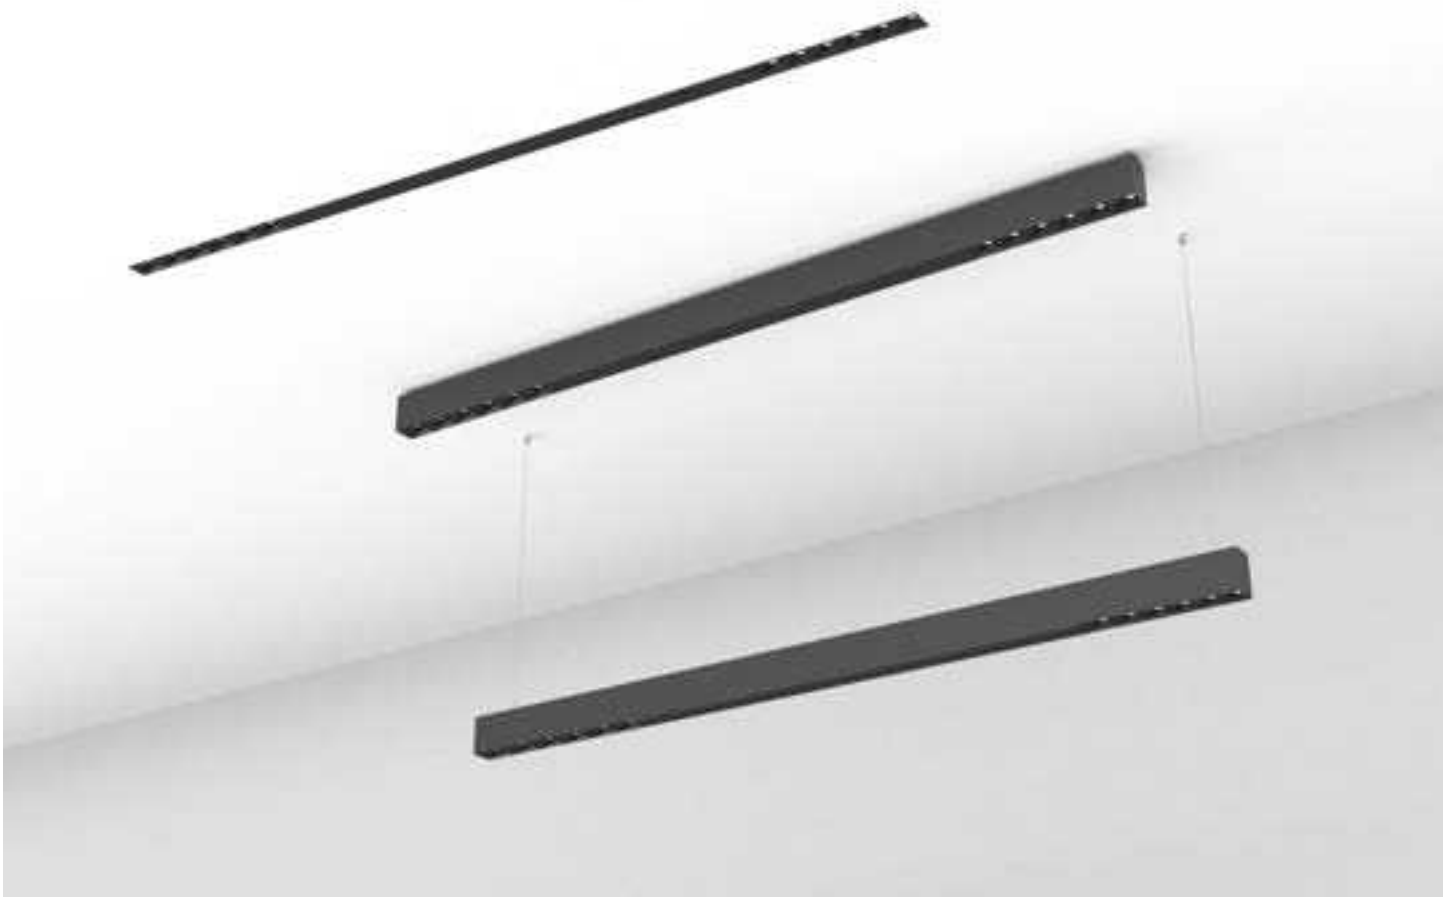

26W | CRI80 CRI90 | 2700K 3000K 4000K | 15° 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
26 W	30 W	36 V	700 mA	80	2700K	15°	2800lm	2000lm	1200mm	FL1200(X)Y-2*AL300-26W-827-15D
						30°	2800lm	2000lm	1200mm	FL1200(X)Y-2*AL300-26W-827-30D
					3000K	15°	3000lm	2200lm	1200mm	FL1200(X)Y-2*AL300-26W-830-15D
						30°	3000lm	2200lm	1200mm	FL1200(X)Y-2*AL300-26W-830-30D
					4000K	15°	3400lm	2400lm	1200mm	FL1200(X)Y-2*AL300-26W-840-15D
						30°	3400lm	2400lm	1200mm	FL1200(X)Y-2*AL300-26W-840-30D

Remark: X= P (Pendant) X= S (Surface mounted) X= R (Recessed mounted)
Y= F ON-OFF Y= D DALI Dim

Model	ON-OFF	DALI Dim
FL1200-2*AL300 - Anbau	549,00 €	659,00 €
FL1200-2*AL300 - Pendel	569,00 €	679,00 €

						30°	2800lm	2000lm	1500mm	FL1500(X)Y-2*AL300-26W-827-30D
					3000K	15°	3000lm	2200lm	1500mm	FL1500(X)Y-2*AL300-26W-830-15D
						30°	3000lm	2200lm	1500mm	FL1500(X)Y-2*AL300-26W-830-30D
					4000K	15°	3400lm	2400lm	1500mm	FL1500(X)Y-2*AL300-26W-840-15D
						30°	3400lm	2400lm	1500mm	FL1500(X)Y-2*AL300-26W-840-30D

Remark: X= P (Pendant) X= S (Surface mounted) X= R (Recessed mounted)
Y= F ON-OFF Y= D DALI Dim

Model	ON-OFF	DALI Dim
FL1500-2*AL300 - Anbau	629,00 €	749,00 €
FL1500-2*AL300 - Pendel	639,00 €	759,00 €

DE: EINBAUPROFILE auf Anfrage
EN: Recessed Profile on Request

NEKO / FUSION Linear System

FL1200-2*AL300+GL600

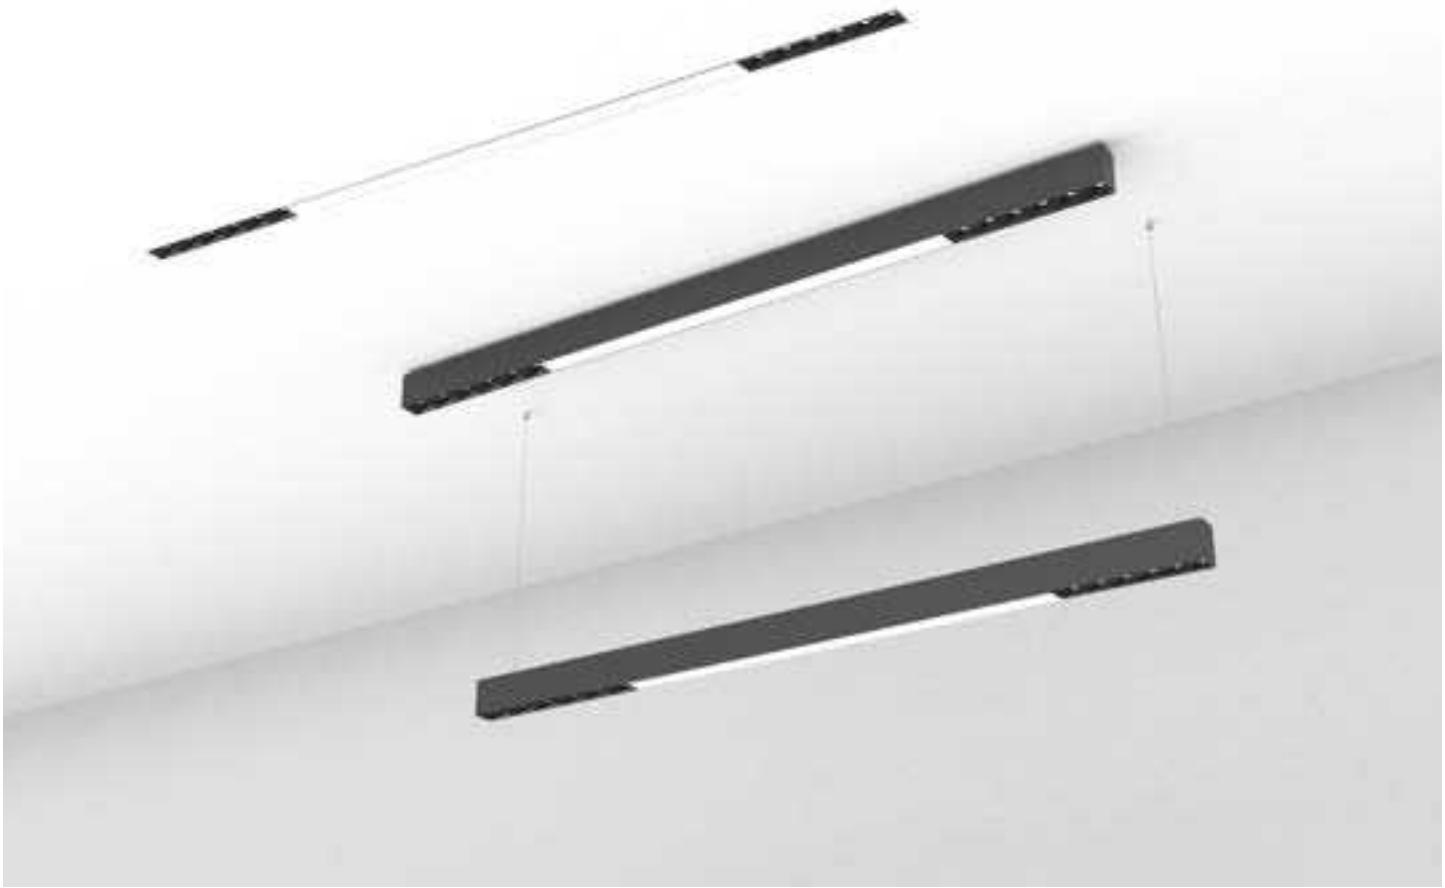

37W | CRI80 CRI90 | 2700K 3000K 4000K | 105° 15° | 105° 30° | SAMSUNG 50,000h@L80B10 | OSRAM 50,000h@L80B10 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
37 W	41 W	47 V	700 mA	80	2700K	15°+105°	4500lm	3300lm	FL1200(X)Y-2*AL300+GL600-37W-827-15D
						30°+105°	4500lm	3300lm	FL1200(X)Y-2*AL300+GL600-37W-827-30D
					3000K	15°+105°	4700lm	3500lm	FL1200(X)Y-2*AL300+GL600-37W-830-15D
						30°+105°	4700lm	3500lm	FL1200(X)Y-2*AL300+GL600-37W-830-30D
					4000K	15°+105°	5100lm	3800lm	FL1200(X)Y-2*AL300+GL600-37W-840-15D
						30°+105°	5100lm	3800lm	FL1200(X)Y-2*AL300+GL600-37W-840-30D

Remark: X= P (Pendant) X= S (Surface mounted) X= R (Recessed mounted)
Y= F ON-OFF Y= D DALI Dim

DE: EINBAUPROFILE auf Anfrage
EN: Recessed Profile on Request

Model	ON-OFF	DALI Dim
FL1200-2*AL300+GL600 - Anbau	629,00 €	739,00 €
FL1200-2*AL300+GL600 - Pendel	649,00 €	769,00 €

Microprismatic Cover/ Opal Cover/ U-Cover

Surface Mounted



Microprismatic Cover/ Opal Cover/ U-Cover

Pendant

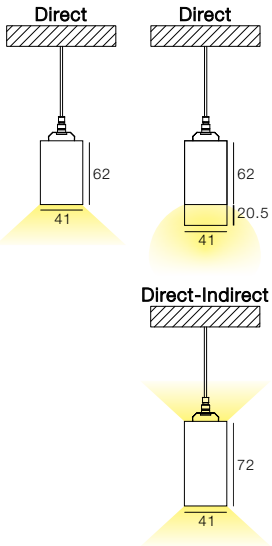

Microprismatic Cover/ Opal Cover

Trim Recessed



Microprismatic Cover/ Opal Cover

Wall Mounted

Direct



Direct-Indirect



NEKO / DASH 40 Surface-mounted
Linear Light System

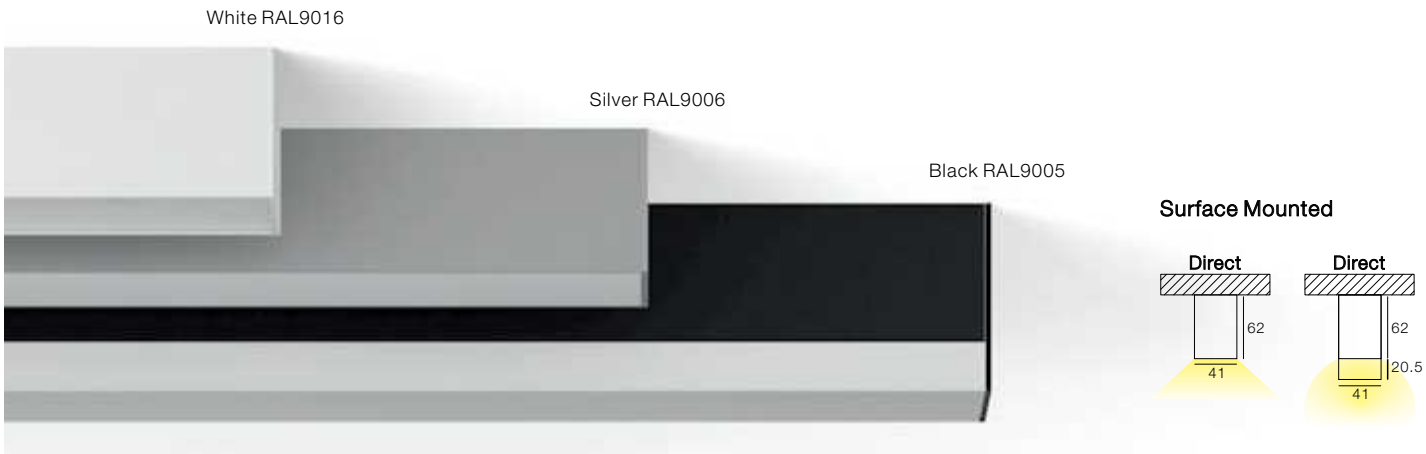

Length	Cover	ON-OFF	DALI Dim
571mm	opal	229,00 €	259,00 €
571mm	microprismatic / U-Cover	239,00 €	269,00 €
851mm	opal	249,00 €	289,00 €
851mm	microprismatic / U-Cover	269,00 €	309,00 €
1131mm	opal	279,00 €	319,00 €
1131mm	microprismatic / U-Cover	309,00 €	349,00 €
1271mm	opal	299,00 €	339,00 €
1271mm	microprismatic / U-Cover	329,00 €	369,00 €
1411mm	opal	319,00 €	359,00 €
1411mm	microprismatic / U-Cover	349,00 €	389,00 €
1691mm	opal	349,00 €	409,00 €
1691mm	microprismatic / U-Cover	379,00 €	439,00 €
2251mm	opal	419,00 €	469,00 €
2251mm	microprismatic / U-Cover	459,00 €	519,00 €
2531mm	opal	449,00 €	509,00 €
2531mm	microprismatic / U-Cover	499,00 €	559,00 €
2812mm	opal	549,00 €	629,00 €
2812mm	microprismatic / U-Cover	609,00 €	689,00 €
3372mm	opal	609,00 €	719,00 €
3372mm	microprismatic / U-Cover	679,00 €	789,00 €
3792mm	opal	659,00 €	759,00 €
3792mm	microprismatic / U-Cover	729,00 €	829,00 €

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED | CRI >80 | CRI >90 | IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

NEKO / DASH 40 Surface-mounted
Linear Light System

LED ANBAULEUCHTE
LED SURFACE MOUNTED LUMINAIRE
LED LUMINAIRE EN SAILLIE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D4S03381-840LPF-BM

❶ ❷ ❸ ❹ ❺ ❻ ❼

❶

LÄNGE LENGTH LONGEUR		CODE
571 mm	1,5	00571
851 mm	2,0	00851
1131 mm	2,6	01131
1271 mm	2,8	01271
1411 mm	3,5	01411
1691 mm	4,0	01691
2251 mm	5,0	02251
2531 mm	5,2	02531
2812 mm	6,6	02812
3372 mm	7,6	03372
3792 mm	9,1	03792

❷

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

❸

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

❹

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

❺

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

❻

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

❼

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M
U-Cover	C

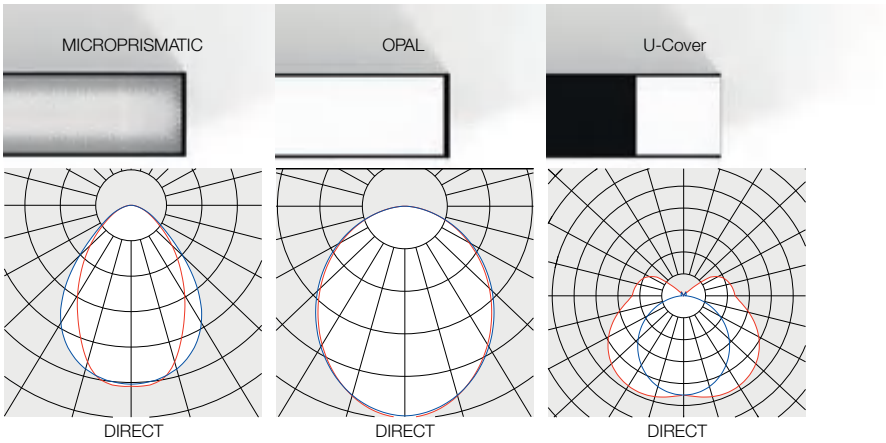

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
571	757 lm I 8 W	1503 lm I 17 W	852 lm I 8 W	1439 lm I 17 W	785 lm I 8 W	1492 lm I 17 W
851	1135 lm I 12 W	2254 lm I 23 W	1136 lm I 12W	2158 lm I 23 W	1177 lm I 12W	2238 lm I 23 W
1131	1514 lm I 15 W	3005 lm I 29 W	1514 lm I 15 W	2879 lm I 29 W	1570 lm I 15 W	2984 lm I 29 W
1271	1703 lm I 17 W	3381 lm I 33 W	1704 lm I 17 W	3238 lm I 33 W	1767 lm I 17 W	3357 lm I 33 W
1411	1892 lm I 18 W	3757 lm I 35 W	1893 lm I 18 W	3599 lm I 35 W	1962 lm I 18 W	3730 lm I 35 W
1691	2271 lm I 20 W	4508 lm I 40 W	2272 lm I 20 W	4318 lm I 40 W	2355 lm I 20 W	4476 lm I 40 W
2251	3028 lm I 27 W	6010 lm I 53 W	3028 lm I 27 W	5756 lm I 53 W	3140 lm I 27 W	5968 lm I 53 W
2531	3406 lm I 30 W	6762 lm I 60 W	3408 lm I 30 W	6475 lm I 60 W	3534 lm I 30 W	6714 lm I 60 W
2812	3784 lm I 35 W	7514 lm I 70 W	3786 lm I 35 W	7198 lm I 70 W	3924 lm I 35 W	7460 lm I 70 W
3372	4542 lm I 41 W	9016 lm I 81 W	4544 lm I 41 W	8636 lm I 81 W	4710 lm I 41 W	8952 lm I 81 W
3792	5110 lm I 46 W	10143 lm I 91 W	5112 lm I 46 W	9715 lm I 91 W	5299 lm I 46 W	10071 lm I 91 W

NEKO / DASH 40 Pendant
Linear Light System

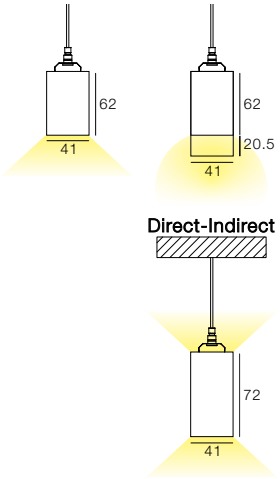

Direct			
Length	Cover	ON-OFF	DALI Dim
1131mm	opal	299,00 €	339,00 €
1131mm	microprismatic / U-Cover	319,00 €	359,00 €
1271mm	opal	319,00 €	349,00 €
1271mm	microprismatic / U-Cover	339,00 €	379,00 €
1411mm	opal	339,00 €	369,00 €
1411mm	microprismatic / U-Cover	369,00 €	399,00 €
1691mm	opal	369,00 €	419,00 €
1691mm	microprismatic / U-Cover	399,00 €	449,00 €
2251mm	opal	429,00 €	489,00 €
2251mm	microprismatic / U-Cover	469,00 €	529,00 €
2531mm	opal	479,00 €	539,00 €
2531mm	microprismatic / U-Cover	529,00 €	589,00 €
2812mm	opal	589,00 €	659,00 €
2812mm	microprismatic / U-Cover	639,00 €	709,00 €
3372mm	opal	649,00 €	759,00 €
3372mm	microprismatic / U-Cover	719,00 €	829,00 €
3792mm	opal	689,00 €	789,00 €
3792mm	microprismatic / U-Cover	809,00 €	859,00 €

Direct/Indirect			
Length	Cover	ON-OFF	DALI Dim
1131mm	opal	409,00 €	469,00 €
1131mm	microprismatic	429,00 €	489,00 €
1271mm	opal	429,00 €	489,00 €
1271mm	microprismatic	459,00 €	519,00 €
1411mm	opal	499,00 €	579,00 €
1411mm	microprismatic	529,00 €	609,00 €
1691mm	opal	549,00 €	629,00 €
1691mm	microprismatic	579,00 €	659,00 €
2251mm	opal	649,00 €	729,00 €
2251mm	microprismatic	699,00 €	779,00 €
2531mm	opal	729,00 €	809,00 €
2531mm	microprismatic	779,00 €	859,00 €
2812mm	opal	909,00 €	1069,00 €
2812mm	microprismatic	969,00 €	1129,00 €
3372mm	opal	1009,00 €	1169,00 €
3372mm	microprismatic	1079,00 €	1239,00 €
3792mm	opal	1039,00 €	1169,00 €
3792mm	microprismatic	1119,00 €	1249,00 €

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light, Direct-Indirect Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED | CRI >80 | CRI >90 | IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

NEKO / DASH 40 Pendant
Linear Light System

LED-HÄNGELEUCHTE
LED PENDANT LUMINAIRE
LED SUSPENSION

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D4P03381-840LPF-BM-U

❶ ❷ ❸ ❹ ❺ ❻ ❼ ❽

❶

LÄNGE LENGTH LONGEUR		CODE
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,9	01691
2251 mm	6,0	02251
2531 mm	6,2	02531
2812 mm	8,0	02812
3372 mm	9,3	03372
3792 mm	11,3	03792

❷

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

❸

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

❹

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

❺

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

❻

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

❼

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M
U-Cover	C

❽

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

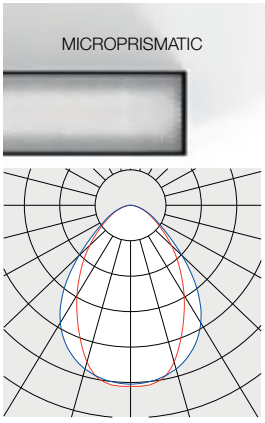

DIRECT

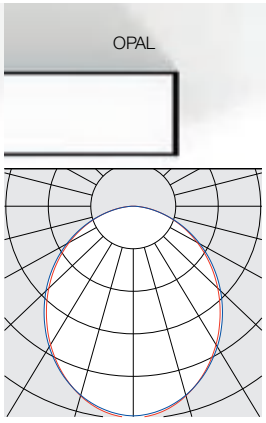

DIRECT

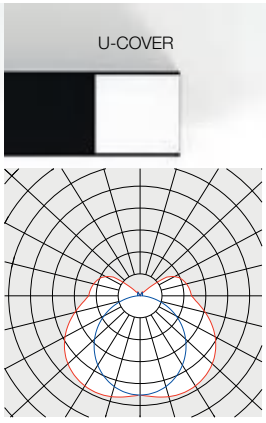

DIRECT

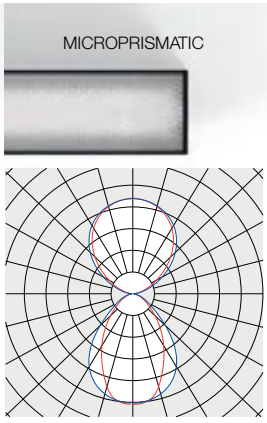

DIRECT-INDIRECT

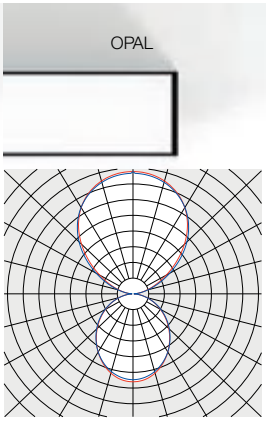

DIRECT-INDIRECT

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
1131	1514 lm I 15 W	3005 lm I 29 W	1514 lm I 15 W	2879 lm I 29 W	1570 lm I 15 W	2984 lm I 29 W	3527 lm I 26 W	6866 lm I 55 W	3535 lm I 26 W	6846 lm I 55 W
1271	1703 lm I 17 W	3381 lm I 33 W	1704 lm I 17 W	3238 lm I 33 W	1767 lm I 17 W	3357 lm I 33 W	3968 lm I 29 W	7724 lm I 63 W	3977 lm I 29 W	7702 lm I 63 W
1411	1892 lm I 18 W	3757 lm I 35 W	1893 lm I 18 W	3599 lm I 35 W	1962 lm I 18 W	3730 lm I 35 W	4408 lm I 32 W	8582 lm I 68 W	4419 lm I 32 W	8557 lm I 68 W
1691	2271 lm I 20 W	4508 lm I 40 W	2272 lm I 20 W	4318 lm I 40 W	2355 lm I 20 W	4476 lm I 40 W	5289 lm I 38 W	10298 lm I 82 W	5303 lm I 38 W	10268 lm I 82 W
2251	3028 lm I 27 W	6010 lm I 53 W	3028 lm I 27 W	5756 lm I 53 W	3140 lm I 27 W	5968 lm I 53 W	7054 lm I 50 W	13732 lm I 105 W	7070 lm I 50 W	13692 lm I 105 W
2531	3406 lm I 30 W	6762 lm I 60 W	3408 lm I 30 W	6475 lm I 60 W	3534 lm I 30 W	6714 lm I 60 W	7936 lm I 56 W	15448 lm I 119 W	7954 lm I 56 W	15404 lm I 119 W
2812	3784 lm I 35 W	7514 lm I 70 W	3786 lm I 35 W	7198 lm I 70 W	3924 lm I 35 W	7460 lm I 70 W	8816 lm I 64 W	17164 lm I 136 W	8838 lm I 64 W	17114 lm I 136 W
3372	4542 lm I 41 W	9016 lm I 81 W	4544 lm I 41 W	8636 lm I 81 W	4710 lm I 41 W	8952 lm I 81 W	10578 lm I 77 W	20596 lm I 163 W	10606 lm I 77 W	20536 lm I 163 W
3792	5110 lm I 46 W	10143 lm I 91 W	5112 lm I 46 W	9715 lm I 91 W	5299 lm I 46 W	10071 lm I 91 W	11900 lm I 87 W	23140 lm I 184 W	11932 lm I 87 W	23103 lm I 184 W

NEKO / DASH 40 Recessed
Linear Light System

Trim Recessed



Length	Cover	ON-OFF	DALI Dim
580mm	opal	229,00 €	259,00 €
580mm	microprismatic	239,00 €	269,00 €
860mm	opal	249,00 €	289,00 €
860mm	microprismatic	269,00 €	309,00 €
1140mm	opal	289,00 €	329,00 €
1140mm	microprismatic	309,00 €	349,00 €
1280mm	opal	299,00 €	339,00 €
1280mm	microprismatic	329,00 €	369,00 €
1420mm	opal	319,00 €	359,00 €
1420mm	microprismatic	349,00 €	389,00 €
1700mm	opal	349,00 €	409,00 €
1700mm	microprismatic	379,00 €	439,00 €
2260mm	opal	419,00 €	479,00 €
2260mm	microprismatic	459,00 €	519,00 €
2540mm	opal	459,00 €	519,00 €
2540mm	microprismatic	509,00 €	569,00 €
2821mm	opal	559,00 €	639,00 €
2821mm	microprismatic	609,00 €	689,00 €
3381mm	opal	619,00 €	739,00 €
3381mm	microprismatic	679,00 €	799,00 €
3801mm	opal	669,00 €	759,00 €
3801mm	microprismatic	739,00 €	829,00 €

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

	HOUSING COLOUR
	Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
	Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
	Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED | CRI >80 | CRI >90 | IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

NEKO / DASH 40 Recessed
Linear Light System

LED EINBAULEUCHTE
LED RECESSED VERSION
LED LUMINAIRE ENCASTRABLE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D4R03381-840LPF-BM

❶ ❷ ❸ ❹ ❺ ❻ ❼

❶

LÄNGE LENGTH LONGEUR		CODE
580 mm	1,7	00571
860 mm	2,0	00851
1140 mm	2,5	01131
1280 mm	2,7	01271
1420 mm	3,3	01411
1700 mm	3,8	01691
2260 mm	4,6	02251
2540 mm	4,8	02531
2821m	6,4	02812
3381mm	7,3	03372
3801 mm	8,9	03792

❷

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

❸

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

❹

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

❺

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

❻

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

❼

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

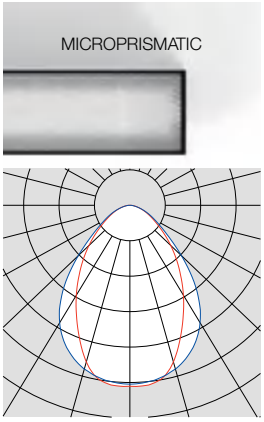

DIRECT

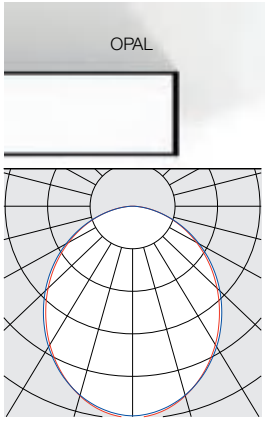

DIRECT

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
580	757 lm I 8 W	1503 lm I 17 W	852 lm I 8 W	1439 lm I 17 W
860	1135 lm I 12 W	2254 lm I 23 W	1136 lm I 12W	2158 lm I 23 W
1140	1514 lm I 15 W	3005 lm I 29 W	1514 lm I 15 W	2879 lm I 29 W
1280	1703 lm I 17 W	3381 lm I 33 W	1704 lm I 17 W	3238 lm I 33 W
1420	1892 lm I 18 W	3757 lm I 35 W	1893 lm I 18 W	3599 lm I 35 W
1700	2271 lm I 20 W	4508 lm I 40 W	2272 lm I 20 W	4318 lm I 40 W
2260	3028 lm I 27 W	6010 lm I 53 W	3028 lm I 27 W	5756 lm I 53 W
2540	3406 lm I 30 W	6762 lm I 60 W	3408 lm I 30 W	6475 lm I 60 W
2821	3784 lm I 35 W	7514 lm I 70 W	3786 lm I 35 W	7198 lm I 70 W
3381	4542 lm I 41 W	9016 lm I 81 W	4544 lm I 41 W	8636 lm I 81 W
3801	5110 lm I 46 W	10143 lm I 91 W	5112 lm I 46 W	9715 lm I 91 W

CUT OUT

RAHMEN FRAME CADRE	LÄNGE LENGTH LA GAUCHE	BREITE WIDTH À DROITE	TIEFE DEPTH PROFONDEUR
580 mm	575 mm	49 mm	110 mm
860 mm	855 mm	49 mm	110 mm
1140 mm	1135 mm	49 mm	110 mm
1280 mm	1275 mm	49 mm	110 mm
1420 mm	1415 mm	49 mm	110 mm
1700 mm	1695 mm	49 mm	110 mm
2260 mm	2255 mm	49 mm	110 mm
2540 mm	2535 mm	49 mm	110 mm
2821 mm	2816 mm	49 mm	110 mm
3381 mm	3376 mm	49 mm	110 mm
3801 mm	3796 mm	49 mm	110 mm

NEKO / DASH 40 Wall-mounted
Linear Light System

Wall Mounted

Direct



Direct-Indirect



Direct			
Length	Cover	ON-OFF	DALI Dim
571mm	opal	229,00 €	259,00 €
571mm	microprismatic	239,00 €	269,00 €
851mm	opal	249,00 €	289,00 €
851mm	microprismatic	269,00 €	309,00 €
1131mm	opal	299,00 €	339,00 €
1131mm	microprismatic	319,00 €	359,00 €
1271mm	opal	319,00 €	359,00 €
1271mm	microprismatic	339,00 €	379,00 €
1411mm	opal	339,00 €	369,00 €
1411mm	microprismatic	369,00 €	399,00 €
1691mm	opal	359,00 €	419,00 €
1691mm	microprismatic	389,00 €	449,00 €
2251mm	opal	429,00 €	489,00 €
2251mm	microprismatic	469,00 €	529,00 €
2531mm	opal	479,00 €	539,00 €
2531mm	microprismatic	529,00 €	589,00 €
2812mm	opal	579,00 €	659,00 €
2812mm	microprismatic	639,00 €	709,00 €
3372mm	opal	649,00 €	759,00 €
3372mm	microprismatic / U-Cover	719,00 €	829,00 €
3792mm	opal	689,00 €	789,00 €
3792mm	microprismatic / U-Cover	809,00 €	859,00 €

Direct/Indirect			
Length	Cover	ON-OFF	DALI Dim
571mm	opal	289,00 €	319,00 €
571mm	microprismatic	299,00 €	329,00 €
851mm	opal	329,00 €	369,00 €
851mm	microprismatic	349,00 €	389,00 €
1131mm	opal	389,00 €	439,00 €
1131mm	microprismatic / U-Cover	409,00 €	459,00 €
1271mm	opal	409,00 €	469,00 €
1271mm	microprismatic / U-Cover	429,00 €	489,00 €
1411mm	opal	479,00 €	549,00 €
1411mm	microprismatic / U-Cover	509,00 €	579,00 €
1691mm	opal	519,00 €	599,00 €
1691mm	microprismatic / U-Cover	549,00 €	629,00 €
2251mm	opal	619,00 €	689,00 €
2251mm	microprismatic / U-Cover	659,00 €	729,00 €
2531mm	opal	689,00 €	759,00 €
2531mm	microprismatic / U-Cover	739,00 €	809,00 €
2812mm	opal	859,00 €	1009,00 €
2812mm	microprismatic / U-Cover	919,00 €	1069,00 €
3372mm	opal	949,00 €	1099,00 €
3372mm	microprismatic / U-Cover	1019,00 €	1169,00 €
3792mm	opal	979,00 €	1109,00 €
3792mm	microprismatic / U-Cover	1059,00 €	1189,00 €

NEKO / DASH 40 Wall-mounted
Linear Light System

LED WANDLEUCHTE
LED WALL LUMINAIRE
LED APPLIQUE MURALE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D4W03381-840LPF-BM-U

❶ ❷ ❸ ❹ ❺ ❻ ❼ ❽

❶

LÄNGE LENGTH LONGEUR		CODE
571 mm	2,2	00571
851 mm	2,9	00851
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,7	01691
2251 mm	5,7	02251
2531 mm	5,9	02531
2812 mm	7,8	02812
3372 mm	9,2	03372
3792 mm	10,9	03792

❷

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

❸

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

❹

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

❺

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

❻

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

❼

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M
U-Cover	C

❽

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

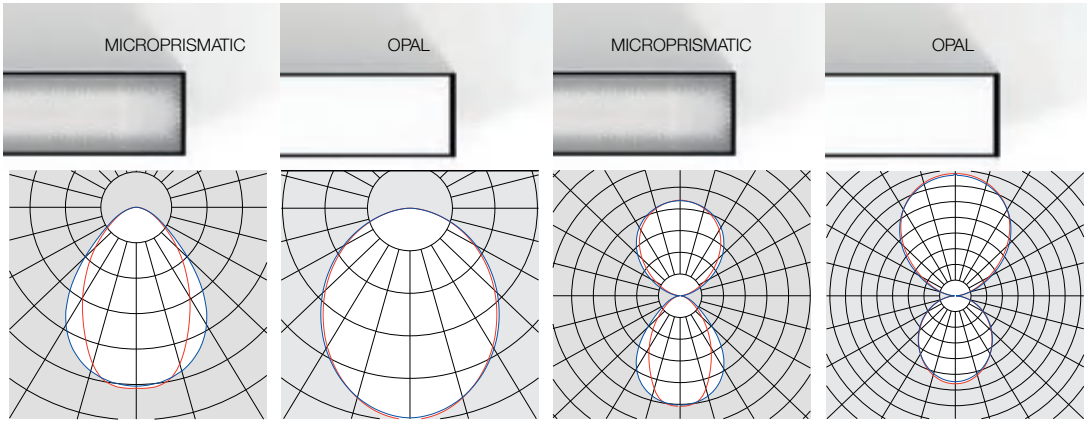

LENGTH MM	DIRECT LUMEN I WATT LOW OUTPUT	DIRECT LUMEN I WATT HIGH OUTPUT	DIRECT LUMEN I WATT LOW OUTPUT	DIRECT LUMENIWATT HIGH OUTPUT	DIRECT-INDIRECT LUMEN I WATT LOW OUTPUT	DIRECT-INDIRECT LUMEN I WATT HIGH OUTPUT	DIRECT-INDIRECT LUMEN I WATT LOW OUTPUT	DIRECT-INDIRECT LUMEN I WATT HIGH OUTPUT
571	757 lm I 8 W	1503 lm I 17 W	852 lm I 8 W	1439 lm I 17 W	1763 lm I 14 W	3433 lm I 29 W	1767 lm I 14 W	3423 lm I 29 W
851	1135 lm I 12 W	2254 lm I 23 W	1136 lm I 12W	2158 lm I 23 W	2644 lm I 20 W	5149 lm I 43 W	2650 lm I 20 W	5149 lm I 43 W
1131	1514 lm I 15 W	3005 lm I 29 W	1514 lm I 15 W	2879 lm I 29 W	3527 lm I 26 W	6866 lm I 55 W	3535 lm I 26 W	6846 lm I 55 W
1271	1703 lm I 17 W	3381 lm I 33 W	1704 lm I 17 W	3238 lm I 33 W	3968 lm I 29 W	7724 lm I 63 W	3977 lm I 29 W	7702 lm I 63 W
1411	1892 lm I 18 W	3757 lm I 35 W	1893 lm I 18 W	3599 lm I 35 W	4408 lm I 32 W	8582 lm I 68 W	4419 lm I 32 W	8557 lm I 68 W
1691	2271 lm I 20 W	4508 lm I 40 W	2272 lm I 20 W	4318 lm I 40 W	5289 lm I 38 W	10298 lm I 82 W	5303 lm I 38 W	10268 lm I 82 W
2251	3028 lm I 27 W	6010 lm I 53 W	3028 lm I 27 W	5756 lm I 53 W	7054 lm I 50 W	13732 lm I 105 W	7070 lm I 50 W	13692 lm I 105 W
2531	3406 lm I 30 W	6762 lm I 60 W	3408 lm I 30 W	6475 lm I 60 W	7936 lm I 56 W	15448 lm I 119 W	7954 lm I 56 W	15404 lm I 119 W
2812	3784 lm I 35 W	7514 lm I 70 W	3786 lm I 35 W	7198 lm I 70 W	8816 lm I 64 W	17164 lm I 136 W	8838 lm I 64 W	17114 lm I 136 W
3372	4542 lm I 41 W	9016 lm I 81 W	4544 lm I 41 W	8636 lm I 81 W	10578 lm I 77 W	20596 lm I 163 W	10606 lm I 77 W	20536 lm I 163 W
3792	5110 lm I 46 W	10143 lm I 91 W	5112 lm I 46 W	9715 lm I 91 W	11900 lm I 87 W	23140 lm I 184 W	11932 lm I 87 W	23103 lm I 184 W

NEKO / DASH 50
Linear Light System

Microprismatic Cover/ Opal Cover

Surface Mounted

Microprismatic Cover/ Opal Cover

Pendant



Microprismatic Cover/ Opal Cover

Trim Recessed



NEKO / DASH 50
Linear Light System

Microprismatic Cover/ Opal Cover

Wall Mounted

Direct



Direct-Indirect



NEKO / DASH 50 Surface-mounted
Linear Light System

Length	Cover	ON-OFF	DALI Dim
571mm	opal	229,00 €	259,00 €
571mm	microprismatic	239,00 €	269,00 €
851mm	opal	249,00 €	289,00 €
851mm	microprismatic	269,00 €	309,00 €
1131mm	opal	289,00 €	319,00 €
1131mm	microprismatic	309,00 €	349,00 €
1271mm	opal	309,00 €	339,00 €
1271mm	microprismatic	329,00 €	359,00 €
1411mm	opal	319,00 €	359,00 €
1411mm	microprismatic	349,00 €	389,00 €
1691mm	opal	349,00 €	409,00 €
1691mm	microprismatic	379,00 €	439,00 €
2251mm	opal	419,00 €	479,00 €
2251mm	microprismatic	459,00 €	519,00 €
2531mm	opal	449,00 €	509,00 €
2531mm	microprismatic	499,00 €	559,00 €
2812mm	opal	549,00 €	629,00 €
2812mm	microprismatic	609,00 €	689,00 €
3372mm	opal	619,00 €	729,00 €
3372mm	microprismatic	689,00 €	799,00 €
3792mm	opal	669,00 €	769,00 €
3792mm	microprismatic	739,00 €	839,00 €

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED | CRI >80 | CRI >90 | IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

NEKO / DASH 50 Surface-mounted
Linear Light System

LED ANBAULEUCHTE
LED SURFACE MOUNTED LUMINAIRE
LED LUMINAIRE EN SAILLIE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D5S03381-840LPF-BM

❶ ❷ ❸ ❹ ❺ ❻ ❼

❶

LÄNGE LENGTH LONGEUR		CODE
571 mm	1,5	00571
851 mm	2,0	00851
1131 mm	2,6	01131
1271 mm	2,8	01271
1411 mm	3,5	01411
1691 mm	4,0	01691
2251 mm	5,0	02251
2531 mm	5,2	02531
2812 mm	6,6	02812
3372 mm	7,6	03372
3792 mm	9,1	03792

❷

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

❸

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

❹

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

❺

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

❻

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

❼

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

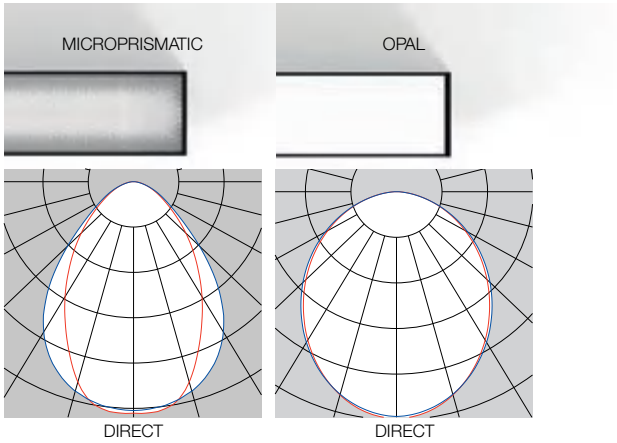

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
571	741 lm I 8 W	1470 lm I 17 W	741 lm I 8 W	1470 lm I 17 W
851	1111 lm I 12 W	2205 lm I 23 W	1111 lm I 12W	2205 lm I 23 W
1131	1481 lm I 15 W	2940 lm I 29 W	1481 lm I 15 W	2940 lm I 29 W
1271	1666 lm I 16 W	3306 lm I 33 W	1666 lm I 16 W	3306 lm I 33 W
1411	1851 lm I 18 W	3675 lm I 35 W	1851 lm I 18 W	3675 lm I 35 W
1691	2222 lm I 20 W	4409 lm I 41 W	2222 lm I 20 W	4409 lm I 41 W
2251	2962 lm I 27 W	5879 lm I 54 W	2962 lm I 27 W	5879 lm I 54 W
2531	3332 lm I 30 W	6614 lm I 60 W	3332 lm I 30 W	6614 lm I 60 W
2812	3702 lm I 35 W	7349 lm I 70 W	3702 lm I 35 W	7349 lm I 70 W
3372	4444 lm I 41 W	8818 lm I 81 W	4444 lm I 41 W	8818 lm I 81 W
3792	5000 lm I 46 W	9922 lm I 91 W	5000 lm I 46 W	9922 lm I 91 W

NEKO / DASH 50 Pendant
Linear Light System

Pendant



Direct			
Length	Cover	ON-OFF	DALI Dim
1131mm	opal	309,00 €	339,00 €
1131mm	microprismatic / U-Cover	329,00 €	359,00 €
1271mm	opal	319,00 €	359,00 €
1271mm	microprismatic / U-Cover	349,00 €	389,00 €
1411mm	opal	339,00 €	379,00 €
1411mm	microprismatic / U-Cover	369,00 €	409,00 €
1691mm	opal	369,00 €	419,00 €
1691mm	microprismatic / U-Cover	399,00 €	449,00 €
2251mm	opal	429,00 €	489,00 €
2251mm	microprismatic / U-Cover	479,00 €	539,00 €
2531mm	opal	479,00 €	549,00 €
2531mm	microprismatic / U-Cover	529,00 €	599,00 €
2812mm	opal	589,00 €	669,00 €
2812mm	microprismatic / U-Cover	639,00 €	719,00 €
3372mm	opal	649,00 €	759,00 €
3372mm	microprismatic / U-Cover	729,00 €	839,00 €
3792mm	opal	699,00 €	789,00 €
3792mm	microprismatic / U-Cover	819,00 €	859,00 €

Direct/Indirect			
Length	Cover	ON-OFF	DALI Dim
1131mm	opal	409,00 €	469,00 €
1131mm	microprismatic	429,00 €	489,00 €
1271mm	opal	429,00 €	489,00 €
1271mm	microprismatic	459,00 €	519,00 €
1411mm	opal	509,00 €	589,00 €
1411mm	microprismatic	539,00 €	619,00 €
1691mm	opal	559,00 €	639,00 €
1691mm	microprismatic	589,00 €	669,00 €
2251mm	opal	659,00 €	739,00 €
2251mm	microprismatic	709,00 €	789,00 €
2531mm	opal	729,00 €	809,00 €
2531mm	microprismatic	789,00 €	869,00 €
2812mm	opal	919,00 €	1079,00 €
2812mm	microprismatic	979,00 €	1139,00 €
3372mm	opal	1019,00 €	1179,00 €
3372mm	microprismatic	1089,00 €	1249,00 €
3792mm	opal	1049,00 €	1189,00 €
3792mm	microprismatic	1129,00 €	1269,00 €

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light, Direct-Indirect Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED | CRI >80 | CRI >90 | IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

NEKO / DASH 50 Pendant
Linear Light System

LED-HÄNGELEUCHTE
LED PENDANT LUMINAIRE
LED SUSPENSION

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D5P03381-840LPF-BM-U

❶ ❷ ❸ ❹ ❺ ❻ ❼ ❽

❶

LÄNGE LENGTH LONGEUR		CODE
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,9	01691
2251 mm	6,0	02251
2531 mm	6,2	02531
2812 mm	8,0	02812
3372 mm	9,3	03372
3792 mm	11,3	03792

❷

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

❸

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

❹

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

❺

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

❻

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

❼

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

❽

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

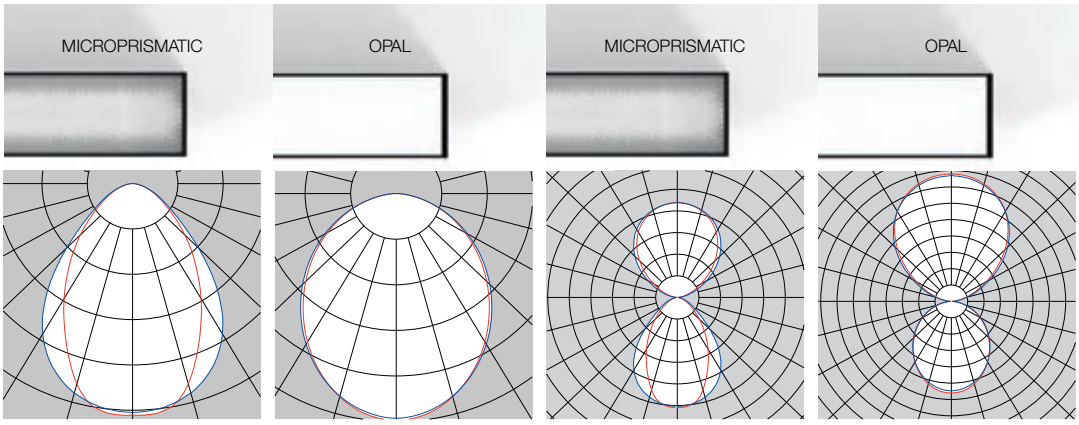

	DIRECT		DIRECT		DIRECT-INDIRECT		DIRECT-INDIRECT	
LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
1131	1481 lm I 15 W	2940 lm I 29 W	1481 lm I 15 W	2940 lm I 29 W	3517 lm I 26 W	6548 lm I 55 W	3517 lm I 26 W	6548 lm I 55 W
1271	1666 lm I 16 W	3306 lm I 33 W	1666 lm I 16 W	3306 lm I 33 W	3955 lm I 29 W	7700 lm I 62 W	3955 lm I 29 W	7700 lm I 62 W
1411	1851 lm I 18 W	3675 lm I 35 W	1851 lm I 18 W	3675 lm I 35 W	4397 lm I 32 W	8556 lm I 68 W	4397 lm I 32 W	8556 lm I 68 W
1691	2222 lm I 20 W	4409 lm I 41 W	2222 lm I 20 W	4409 lm I 41 W	5276 lm I 38 W	10267 lm I 81 W	5276 lm I 38 W	10267 lm I 81 W
2251	2962 lm I 27 W	5879 lm I 54 W	2962 lm I 27 W	5879 lm I 54 W	7034 lm I 50 W	13690 lm I 105 W	7034 lm I 50 W	13690 lm I 105 W
2531	3332 lm I 30 W	6614 lm I 60 W	3332 lm I 30 W	6614 lm I 60 W	7912 lm I 56 W	15402 lm I 118 W	7912 lm I 56 W	15402 lm I 118 W
2812	3702 lm I 35 W	7349 lm I 70 W	3702 lm I 35 W	7349 lm I 70 W	8794 lm I 64 W	17112 lm I 136 W	8794 lm I 64 W	17112 lm I 136 W
3372	4444 lm I 41 W	8818 lm I 81 W	4444 lm I 41 W	8818 lm I 81 W	10552 lm I 77 W	20534 lm I 163 W	10552 lm I 77 W	20534 lm I 163 W
3792	5000 lm I 46 W	9922 lm I 91 W	5000 lm I 46 W	9922 lm I 91 W	11871 lm I 86 W	23101 lm I 183 W	11871 lm I 86 W	23101 lm I 183 W

NEKO / DASH 50 Recessed
Linear Light System

Trim Recessed



Length	Cover	ON-OFF	DALI Dim
580mm	opal	229,00 €	259,00 €
580mm	microprismatic	239,00 €	269,00 €
860mm	opal	249,00 €	289,00 €
860mm	microprismatic	269,00 €	309,00 €
1140mm	opal	289,00 €	329,00 €
1140mm	microprismatic	309,00 €	349,00 €
1280mm	opal	299,00 €	339,00 €
1280mm	microprismatic	329,00 €	369,00 €
1420mm	opal	319,00 €	359,00 €
1420mm	microprismatic	349,00 €	389,00 €
1700mm	opal	349,00 €	409,00 €
1700mm	microprismatic	379,00 €	439,00 €
2260mm	opal	419,00 €	479,00 €
2260mm	microprismatic	459,00 €	519,00 €
2540mm	opal	459,00 €	519,00 €
2540mm	microprismatic	509,00 €	569,00 €
2821mm	opal	559,00 €	639,00 €
2821mm	microprismatic	619,00 €	699,00 €
3381mm	opal	629,00 €	739,00 €
3381mm	microprismatic	689,00 €	799,00 €
3801mm	opal	669,00 €	769,00 €
3801mm	microprismatic	739,00 €	839,00 €

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006

LED | CRI >80 | CRI >90 | IP20 | DALI/ SwitchDim | SDCM 3 | >50,000 h | >50,000

NEKO / DASH 50 Recessed
Linear Light System

LED EINBAULEUCHTE
LED RECESSED VERSION
LED LUMINAIRE ENCASTRABLE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D5R03381-840LPF-BM

1 2 3 4 5 6 7

1

LÄNGE LENGTH LONGEUR		CODE
580 mm	1,7	00571
860 mm	2,0	00851
1140 mm	2,5	01131
1280 mm	2,7	01271
1420 mm	3,3	01411
1700 mm	3,8	01691
2260 mm	4,6	02251
2540 mm	4,8	02531
2821m	6,4	02812
3381mm	7,3	03372
3801 mm	8,9	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

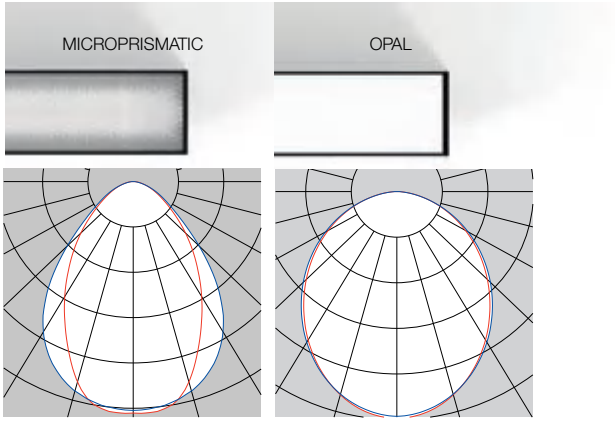

DIRECT DIRECT

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
580	741 lm I 8 W	1470 lm I 17 W	741 lm I 8 W	1470 lm I 17 W
860	1111 lm I 12 W	2205 lm I 23 W	1111 lm I 12W	2205 lm I 23 W
1140	1481 lm I 15 W	2940 lm I 29 W	1481 lm I 15 W	2940 lm I 29 W
1280	1666 lm I 16 W	3306 lm I 33 W	1666 lm I 16 W	3306 lm I 33 W
1420	1851 lm I 18 W	3675 lm I 35 W	1851 lm I 18 W	3675 lm I 35 W
1700	2222 lm I 20 W	4409 lm I 41 W	2222 lm I 20 W	4409 lm I 41 W
2260	2962 lm I 27 W	5879 lm I 54 W	2962 lm I 27 W	5879 lm I 54 W
2540	3332 lm I 30 W	6614 lm I 60 W	3332 lm I 30 W	6614 lm I 60 W
2821	3702 lm I 35 W	7349 lm I 70 W	3702 lm I 35 W	7349 lm I 70 W
3381	4444 lm I 41 W	8818 lm I 81 W	4444 lm I 41 W	8818 lm I 81 W
3801	5000 lm I 46 W	9922 lm I 91 W	5000 lm I 46 W	9922 lm I 91 W

CUT OUT

RAHMEN FRAME CADRE	LÄNGE LENGTH LA GAUCHE	BREITE WIDTH À DROITE	TIEFE DEPTH PROFONDEUR
580 mm	575 mm	57 mm	125 mm
860 mm	855 mm	57 mm	125 mm
1140 mm	1135 mm	57 mm	125 mm
1280 mm	1275 mm	57 mm	125 mm
1420 mm	1415 mm	57 mm	125 mm
1700 mm	1695 mm	57 mm	125 mm
2260 mm	2255 mm	57 mm	125 mm
2540 mm	2535 mm	57 mm	125 mm
2821 mm	2816 mm	57 mm	125 mm
3381 mm	3376 mm	57 mm	125 mm
3801 mm	3796 mm	57 mm	125 mm

NEKO / DASH 50 Wall-mounted
Linear Light System

Wall Mounted

Direct



Direct-Indirect



Direct			
Length	Cover	ON-OFF	DALI Dim
571mm	opal	229,00 €	259,00 €
571mm	microprismatic	239,00 €	269,00 €
851mm	opal	249,00 €	289,00 €
851mm	microprismatic	269,00 €	309,00 €
1131mm	opal	309,00 €	339,00 €
1131mm	microprismatic	329,00 €	359,00 €
1271mm	opal	319,00 €	359,00 €
1271mm	microprismatic	339,00 €	379,00 €
1411mm	opal	339,00 €	379,00 €
1411mm	microprismatic	369,00 €	409,00 €
1691mm	opal	369,00 €	419,00 €
1691mm	microprismatic	399,00 €	449,00 €
2251mm	opal	429,00 €	489,00 €
2251mm	microprismatic	479,00 €	539,00 €
2531mm	opal	479,00 €	549,00 €
2531mm	microprismatic	529,00 €	599,00 €
2812mm	opal	589,00 €	669,00 €
2812mm	microprismatic	649,00 €	719,00 €
3372mm	opal	649,00 €	759,00 €
3372mm	microprismatic / U-Cover	729,00 €	839,00 €
3792mm	opal	699,00 €	789,00 €
3792mm	microprismatic / U-Cover	819,00 €	869,00 €

Direct/Indirect			
Length	Cover	ON-OFF	DALI Dim
571mm	opal	289,00 €	329,00 €
571mm	microprismatic	299,00 €	339,00 €
851mm	opal	329,00 €	369,00 €
851mm	microprismatic	349,00 €	389,00 €
1131mm	opal	389,00 €	449,00 €
1131mm	microprismatic / U-Cover	409,00 €	469,00 €
1271mm	opal	409,00 €	469,00 €
1271mm	microprismatic / U-Cover	429,00 €	489,00 €
1411mm	opal	479,00 €	559,00 €
1411mm	microprismatic / U-Cover	509,00 €	589,00 €
1691mm	opal	529,00 €	599,00 €
1691mm	microprismatic / U-Cover	559,00 €	629,00 €
2251mm	opal	619,00 €	699,00 €
2251mm	microprismatic / U-Cover	669,00 €	749,00 €
2531mm	opal	699,00 €	769,00 €
2531mm	microprismatic / U-Cover	749,00 €	819,00 €
2812mm	opal	869,00 €	1019,00 €
2812mm	microprismatic / U-Cover	919,00 €	1069,00 €
3372mm	opal	959,00 €	1109,00 €
3372mm	microprismatic / U-Cover	1029,00 €	1179,00 €
3792mm	opal	989,00 €	1119,00 €
3792mm	microprismatic / U-Cover	1069,00 €	1199,00 €

NEKO / DASH 50 Wall-mounted
Linear Light System

LED WANDLEUCHTE
LED WALL LUMINAIRE
LED APPLIQUE MURALE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D5W03381-840LPF-BM-U

❶ ❷ ❸ ❹ ❺ ❻ ❼ ❽

❶

LÄNGE LENGTH LONGEUR		CODE
571 mm	2,2	00571
851 mm	2,9	00851
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,7	01691
2251 mm	5,7	02251
2531 mm	5,9	02531
2812 mm	7,8	02812
3372 mm	9,2	03372
3792 mm	10,9	03792

❷

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

❸

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

❹

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

❺

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

❻

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

❼

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

❽

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

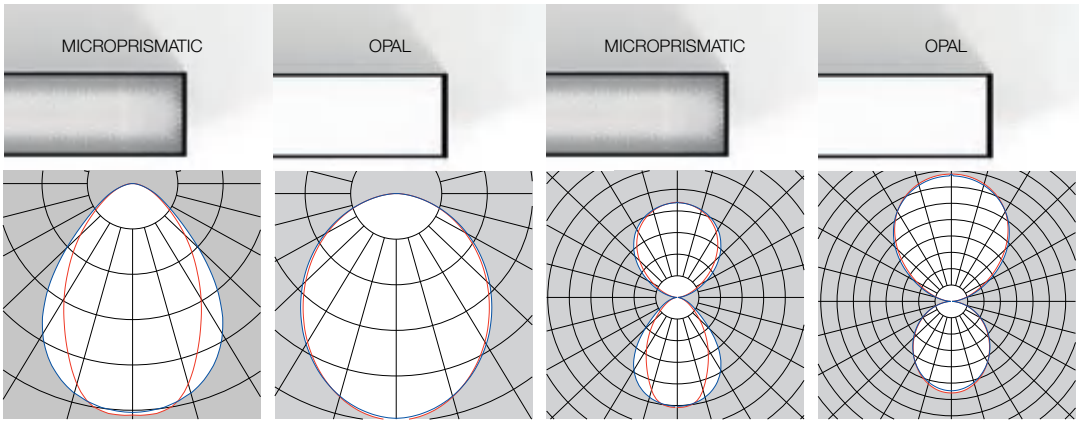

LENGTH MM	DIRECT LUMEN I WATT LOW OUTPUT	DIRECT LUMEN I WATT HIGH OUTPUT	DIRECT LUMEN I WATT LOW OUTPUT	DIRECT LUMENIWATT HIGH OUTPUT	DIRECT/INDIRECT LUMEN I WATT LOW OUTPUT	DIRECT/INDIRECT LUMEN I WATT HIGH OUTPUT	DIRECT/INDIRECT LUMEN I WATT LOW OUTPUT	DIRECT/INDIRECT LUMEN I WATT HIGH OUTPUT
571	741 lm I 8 W	1470 lm I 17 W	741 lm I 8 W	1470 lm I 17 W	1758 lm I 14 W	3422 lm I 29 W	1758 lm I 14 W	3422 lm I 29 W
851	1111 lm I 12 W	2205 lm I 23 W	1111 lm I 12W	2205 lm I 23 W	2638 lm I 23 W	5133 lm I 42 W	2638 lm I 23 W	5133 lm I 42 W
1131	1481 lm I 15 W	2940 lm I 29 W	1481 lm I 15 W	2940 lm I 29 W	3517 lm I 26 W	6548 lm I 55 W	3517 lm I 26 W	6548 lm I 55 W
1271	1666 lm I 16 W	3306 lm I 33 W	1666 lm I 16 W	3306 lm I 33 W	3955 lm I 29 W	7700 lm I 62 W	3955 lm I 29 W	7700 lm I 62 W
1411	1851 lm I 18 W	3675 lm I 35 W	1851 lm I 18 W	3675 lm I 35 W	4397 lm I 32 W	8556 lm I 68 W	4397 lm I 32 W	8556 lm I 68 W
1691	2222 lm I 20 W	4409 lm I 41 W	2222 lm I 20 W	4409 lm I 41 W	5276 lm I 38 W	10267 lm I 81 W	5276 lm I 38 W	10267 lm I 81 W
2251	2962 lm I 27 W	5879 lm I 54 W	2962 lm I 27 W	5879 lm I 54 W	7034 lm I 50 W	13690 lm I 105 W	7034 lm I 50 W	13690 lm I 105 W
2531	3332 lm I 30 W	6614 lm I 60 W	3332 lm I 30 W	6614 lm I 60 W	7912 lm I 56 W	15402 lm I 118 W	7912 lm I 56 W	15402 lm I 118 W
2812	3702 lm I 35 W	7349 lm I 70 W	3702 lm I 35 W	7349 lm I 70 W	8794 lm I 64 W	17112 lm I 136 W	8794 lm I 64 W	17112 lm I 136 W
3372	4444 lm I 41 W	8818 lm I 81 W	4444 lm I 41 W	8818 lm I 81 W	10552 lm I 77 W	20534 lm I 163 W	10552 lm I 77 W	20534 lm I 163 W
3792	5000 lm I 46 W	9922 lm I 91 W	5000 lm I 46 W	9922 lm I 91 W	11871 lm I 86 W	23101 lm I 183 W	11871 lm I 86 W	23101 lm I 183 W

NEKO / DASH Smart
Exchangeable LED Lamp

DASH Smart GR6D-15 60 - Length: 574mm

80°	mA	300	350	400	450	500	550	600	650	700	750	800	Code
	W	8	9	10	11,5	12,5	14	15,5	16	18	19	20	
830	lm	1060	1236	1407	1578	1711	1920	2082	2139	2367	2535	2700	DSD26-L060-83080-WS
	UGR	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22	< 22	
840	lm	1115	1300	1480	1660	1800	2020	2190	2250	2490	2665	2880	DSD26-L060-84080-WS
	UGR	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22	< 22	

ohne / none	39,00 €

DASH Smart GR6D-15 120 - Length: 1174mm

80°	mA	300	350	400	450	500	550	600	650	700	750	800	Code
	W	16	18	20	22	25	27	30	32	36	38	40	
830	lm	2105	2453	2728	3061	3441	3665	4031	4316	4725	4943	5162	DSD26-L120-83080-WS
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22	
840	lm	2215	2580	2870	3220	3620	3855	4240	4540	4970	5200	5430	DSD26-L120-84080-WS
	UGR	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22	< 22	

ohne / none	69,00 €

DASH Smart GR6D-15 150 - Length: 1474mm

80°	mA	300	350	400	450	500	550	600	650	700	750	800	850	900	1050	1100	Code
	W	16	18	20	22	24	27	30	34	36	38	41	43	46	54	56	
830	lm	2235	2614	2904	3194	3527	3841	4240	4820	5143	5447	5728	6036	6388	7263	7600	DSD26-L150-83080-WS
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22	< 22	< 22	
840	lm	2360	2750	3055	3360	3710	4040	4460	5070	5410	5730	6025	6350	6720	7640	8000	DSD26-L150-84080-WS
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22	< 22	< 22	< 22	

ohne / none	89,00 €

NEKO / DASH Smart InTrack Driver
InTrack Driver for 3-Phase Track System

GR6d InTrack Driver 50W 350-1050mA	black / white	ON-OFF	90,00 €
GR6d InTrack Driver 50W 350-1050mA	black / white	DALI Dim	120,00 €

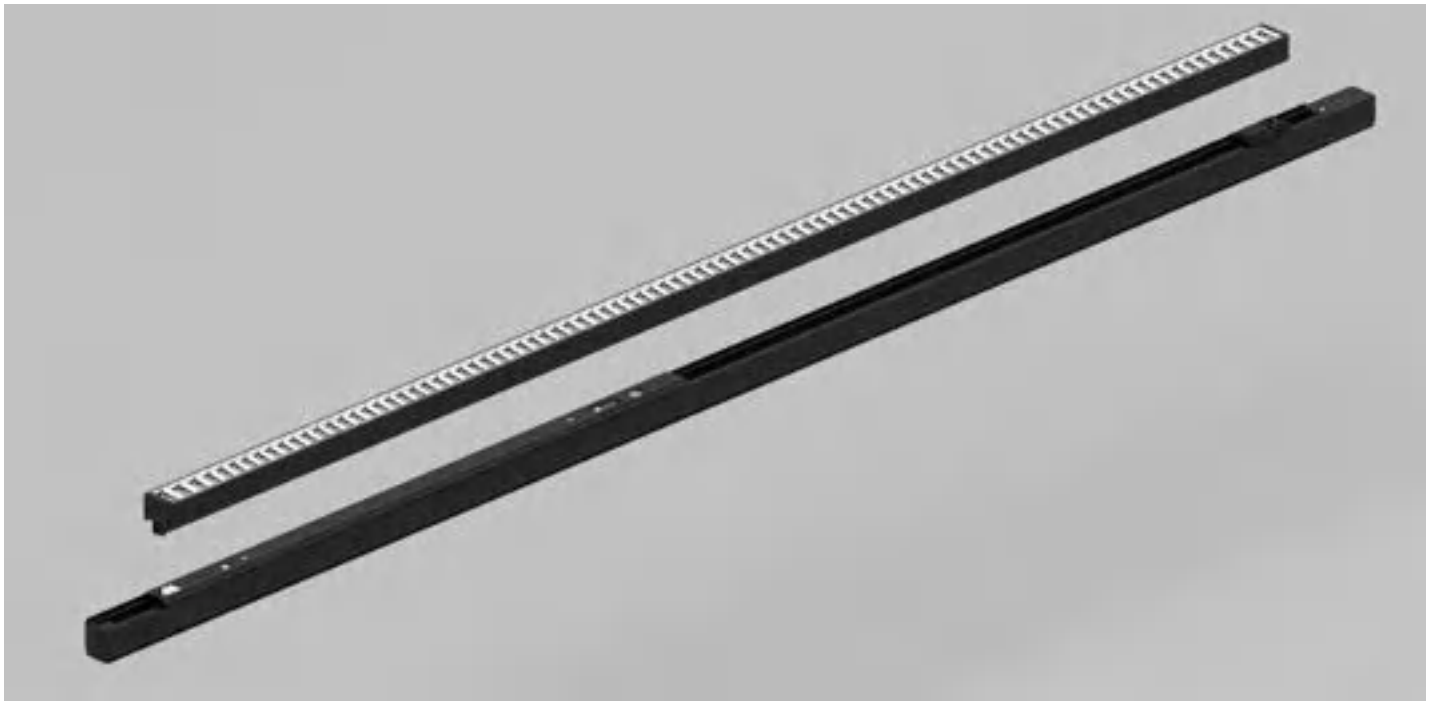

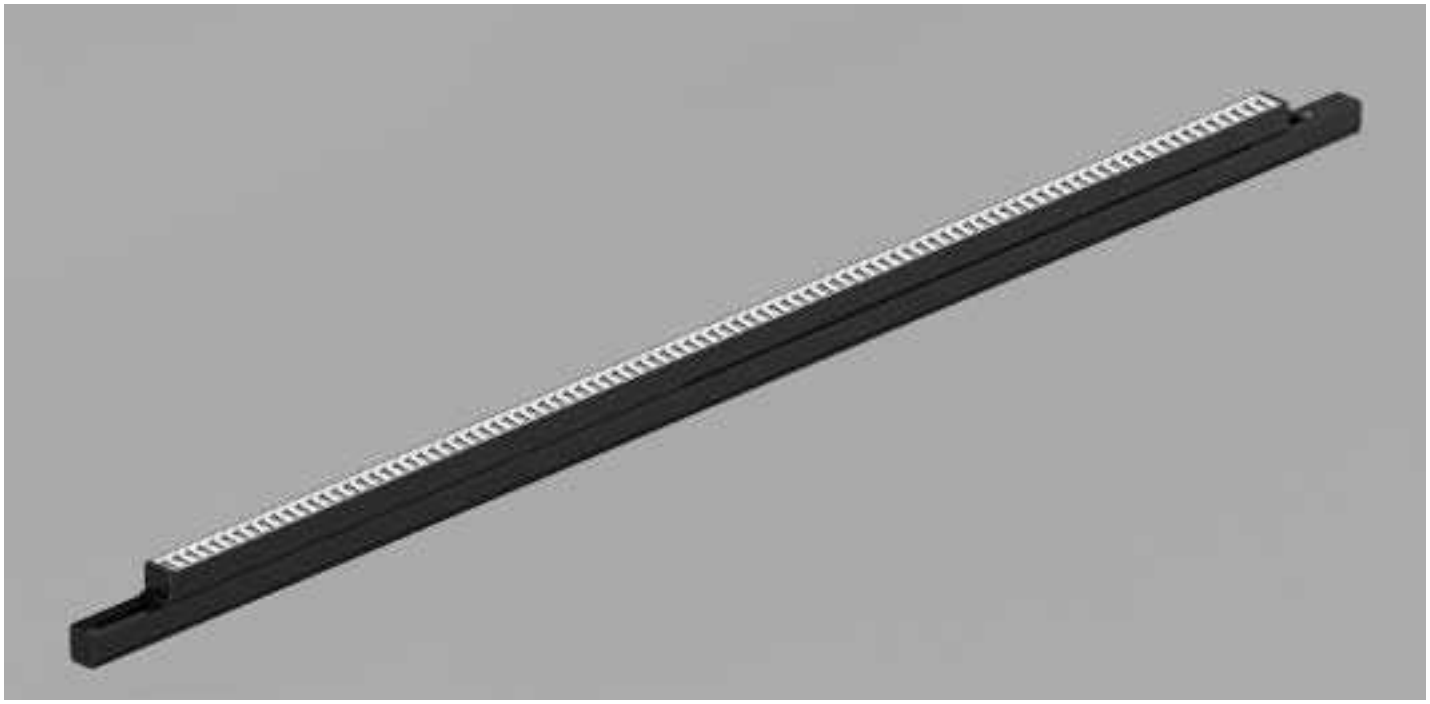

NEKO / DASH Smart Pendant
Exchangeable LED Lamps

Direct				
DSP12-83080F-WS	1178mm	3000K	ON-OFF	399,00 €
DSP12-84080F-WS	1178mm	4000K	ON-OFF	399,00 €
DSP12-83080D-WS	1178mm	3000K	DALI Dim	419,00 €
DSP12-84080D-WS	1178mm	4000K	DALI Dim	419,00 €
DSP15-83080F-WS	1478mm	3000K	ON-OFF	439,00 €
DSP15-84080F-WS	1478mm	4000K	ON-OFF	439,00 €
DSP15-83080D-WS	1478mm	3000K	DALI Dim	459,00 €
DSP15-84080D-WS	1478mm	4000K	DALI Dim	459,00 €

Direct/Indirect				
DSP12-83080F-WS-U	1178mm	3000K	ON-OFF	459,00 €
DSP12-84080F-WS-U	1178mm	4000K	ON-OFF	459,00 €
DSP12-83080D-WS-U	1178mm	3000K	DALI Dim	499,00 €
DSP12-84080D-WS-U	1178mm	4000K	DALI Dim	499,00 €
DSP15-83080F-WS-U	1478mm	3000K	ON-OFF	499,00 €
DSP15-84080F-WS-U	1478mm	4000K	ON-OFF	499,00 €
DSP15-83080D-WS-U	1478mm	3000K	DALI Dim	539,00 €
DSP15-84080D-WS-U	1478mm	4000K	DALI Dim	539,00 €

DASH Smart Pendant - Length 1178mm

Direct Light

80°	mA	300	350	400	450	500	550	600
	W	16	18	20	22	25	27	30
830	lm	2105	2453	2728	3061	3441	3665	4031
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 22
840	lm	2215	2580	2870	3220	3620	3855	4240
	UGR	< 19	< 19	< 19	< 19	< 19	< 22	< 22

Indirect Light

150°	mA	350	400	450	500	550	600
	W	18	20	22	25	27	30
830	lm	2405	2686	2923	3275	3546	3898
840	lm	2530	2825	3075	3445	3730	4100

DASH Smart Pendant - Length 1478mm

Direct Light

80°	mA	300	350	400	450	500	550	600	650	700	750	800
	W	16	18	20	22	24	27	30	34	36	38	41
830	lm	2235	2614	2904	3194	3527	3841	4240	4820	5143	5447	5728
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22
840	lm	2360	2750	3055	3360	3710	4040	4460	5070	5410	5730	6025
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22

Indirect Light

	mA	350	400	450	500	550	600	650	700	750	800
	W	18	20	22	25	27	30	34	36	38	41
830	lm	2419	2700	2947	3332	3565	3945	4183	4592	4848	5038
840	lm	2545	2840	3100	3505	3750	4150	4400	4830	5100	5300

NEKO / DASH Smart Surface-mounted
Exchangeable LED Lamps

DSC12-83080F-WS	1196mm	3000K	ON-OFF	349,00 €
DSC12-84080F-WS	1196mm	4000K	ON-OFF	349,00 €
DSC12-83080D-WS	1196mm	3000K	DALI Dim	369,00 €
DSC12-84080D-WS	1196mm	4000K	DALI Dim	369,00 €
DSC15-83080F-WS	1496mm	3000K	ON-OFF	379,00 €
DSC15-84080F-WS	1496mm	4000K	ON-OFF	379,00 €
DSC15-83080D-WS	1496mm	3000K	DALI Dim	399,00 €
DSC15-84080D-WS	1496mm	4000K	DALI Dim	399,00 €

DASH Smart Surface-mounted - Length 1178mm

80°	mA	300	350	400	450	500	550	600	650	700	750	800
	W	16	18	20	22	25	27	30	32	36	38	40
830	lm	2105	2453	2728	3061	3441	3665	4031	4316	4725	4943	5162
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22
840	lm	2215	2580	2870	3220	3620	3855	4240	4540	4970	5200	5430
	UGR	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22	< 22

DASH Smart Surface-mounted - Length 1478mm

80°	mA	300	350	400	450	500	550	600	650	700	750	800
	W	16	18	20	22	24	27	30	34	36	38	41
830	lm	2235	2614	2904	3194	3527	3841	4240	4820	5143	5447	5728
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22
840	lm	2360	2750	3055	3360	3710	4040	4460	5070	5410	5730	6025
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22

NEKO / DASH Smart 100 Recessed
Exchangeable LED Lamps

DS1R12-83080F-WS	1196mm	3000K	ON-OFF	349,00 €
DS1R12-84080F-WS	1196mm	4000K	ON-OFF	349,00 €
DS1R12-83080D-WS	1196mm	3000K	DALI Dim	369,00 €
DS1R12-84080D-WS	1196mm	4000K	DALI Dim	369,00 €
DS1R15-83080F-WS	1496mm	3000K	ON-OFF	419,00 €
DS1R15-84080F-WS	1496mm	4000K	ON-OFF	419,00 €
DS1R15-83080D-WS	1496mm	3000K	DALI Dim	439,00 €
DS1R15-84080D-WS	1496mm	4000K	DALI Dim	439,00 €

DASH Smart 100-1200 - Length 1196mm

80°	mA	300	350	400	450	500	550	600	650	700	750	800
	W	16	18	20	22	25	27	30	32	36	38	40
830	lm	2105	2453	2728	3061	3441	3665	4031	4316	4725	4943	5162
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22
840	lm	2215	2580	2870	3220	3620	3855	4240	4540	4970	5200	5430
	UGR	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22	< 22

DASH Smart 100-1500 - Length 1496mm

80°	mA	300	350	400	450	500	550	600	650	700	750	800
	W	16	18	20	22	24	27	30	34	36	38	41
830	lm	2235	2614	2904	3194	3527	3841	4240	4820	5143	5447	5728
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22
840	lm	2360	2750	3055	3360	3710	4040	4460	5070	5410	5730	6025
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22

NEKO / DASH Smart 625
Exchangeable LED Lamps

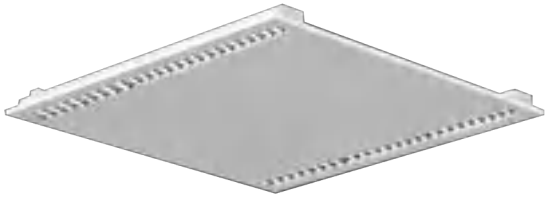

DSR625-83080F-WS	3000K	ON-OFF	199,00 €
DSR625-84080F-WS	4000K	ON-OFF	199,00 €
DSR625-83080D-WS	3000K	DALI Dim	239,00 €
DSR625-84080D-WS	4000K	DALI Dim	239,00 €

DASH Smart 625 - Measurements: 620mm x 620mm x 48mm

80°	mA	300	350	400	450	500	550	600	650	700	750	800
	W	16	18	20	22	24	27	30	32	36	38	40
830	lm	2035	2336	2698	2983	3306	3628	3952	4228	4530	4850	5150
	UGR	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22
840	lm	2145	2490	2840	3140	3480	3819	4160	4450	4780	5120	5450
	UGR	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22	< 22	< 22	< 22

Zubehör / Accessories		
DSR625-white-surface	DASH Smart 625 surface frame white	50,00 €
DSR-Installation-Kit-4	DASH Smart recessed Installation Kit, 4pcs.	10,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System

Slim Track

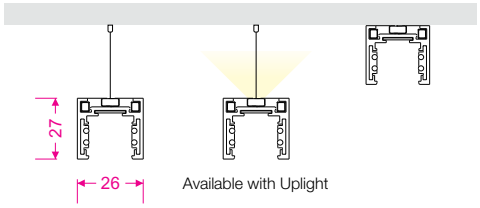

Standard Track

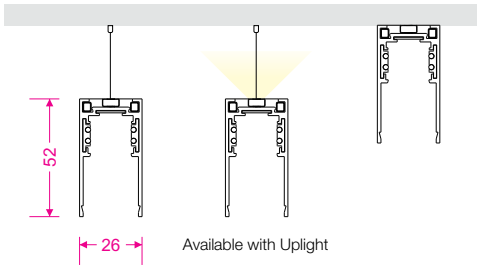

Trim Recessed Track



Trimless Recessed Track-EI



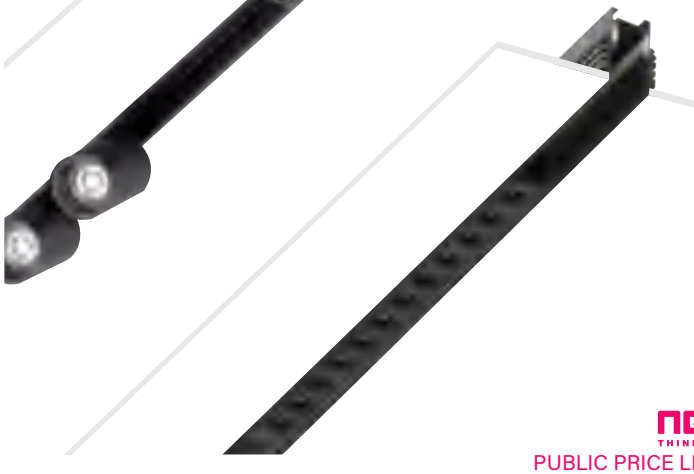

Trimless Recessed Track

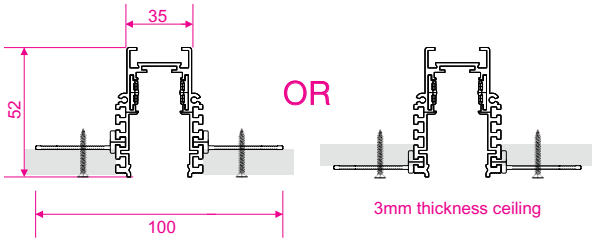

5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings



H Track



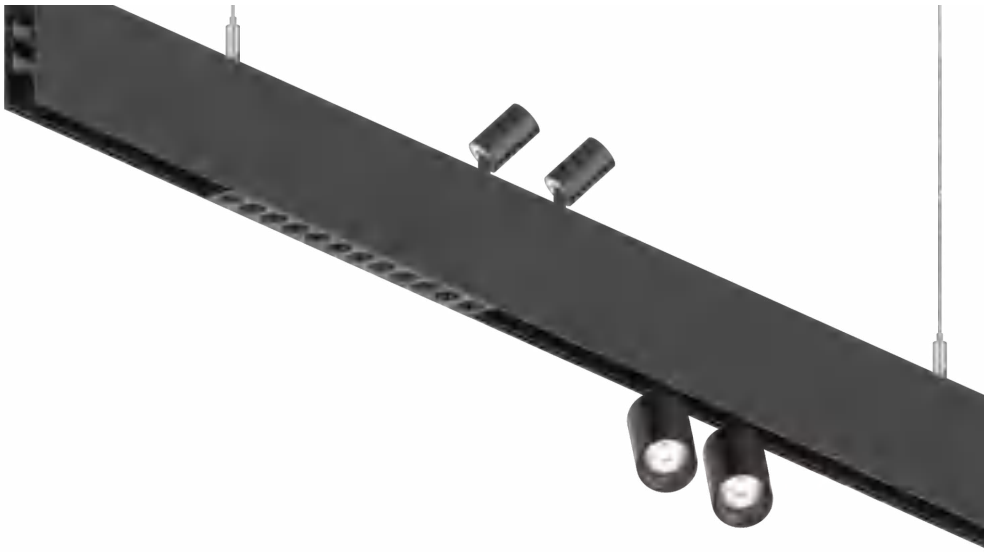

ML26-RS25-3W

ML26-RS25-5W

ML26-RS40-8W



ML26-RS40-16W

ML26-RS40-12W



ML26-FRS72-10W
ML26-FRS72-20W



ML26-RS96-9W



ML26-RS40-24W

ML26-RT55-10W

ML26-RS72-26W



ML26-AL190-3W
ML26-AL190-7W

ML26-AL280-9W
ML26-AL280-13W

ML26-AA315-15W

ML26-SA280-13W



ML26-WW280-7W
ML26-WW560-13W

ML26-GL280-7W/ 10W
ML26-GL560-13W/ 19W
ML26-GL840-19W/ 26W
ML26-GL1120-26W

ML26-SG280-7W/ 10W

ML26-AG315-10W

ML26-PS60-5W

ML26-PAD150-12W

ML26-PB120-10W

ML26-PS40-12W
ML26-PS55-14W

ML26-PD300-18W

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Slim Track Configuration

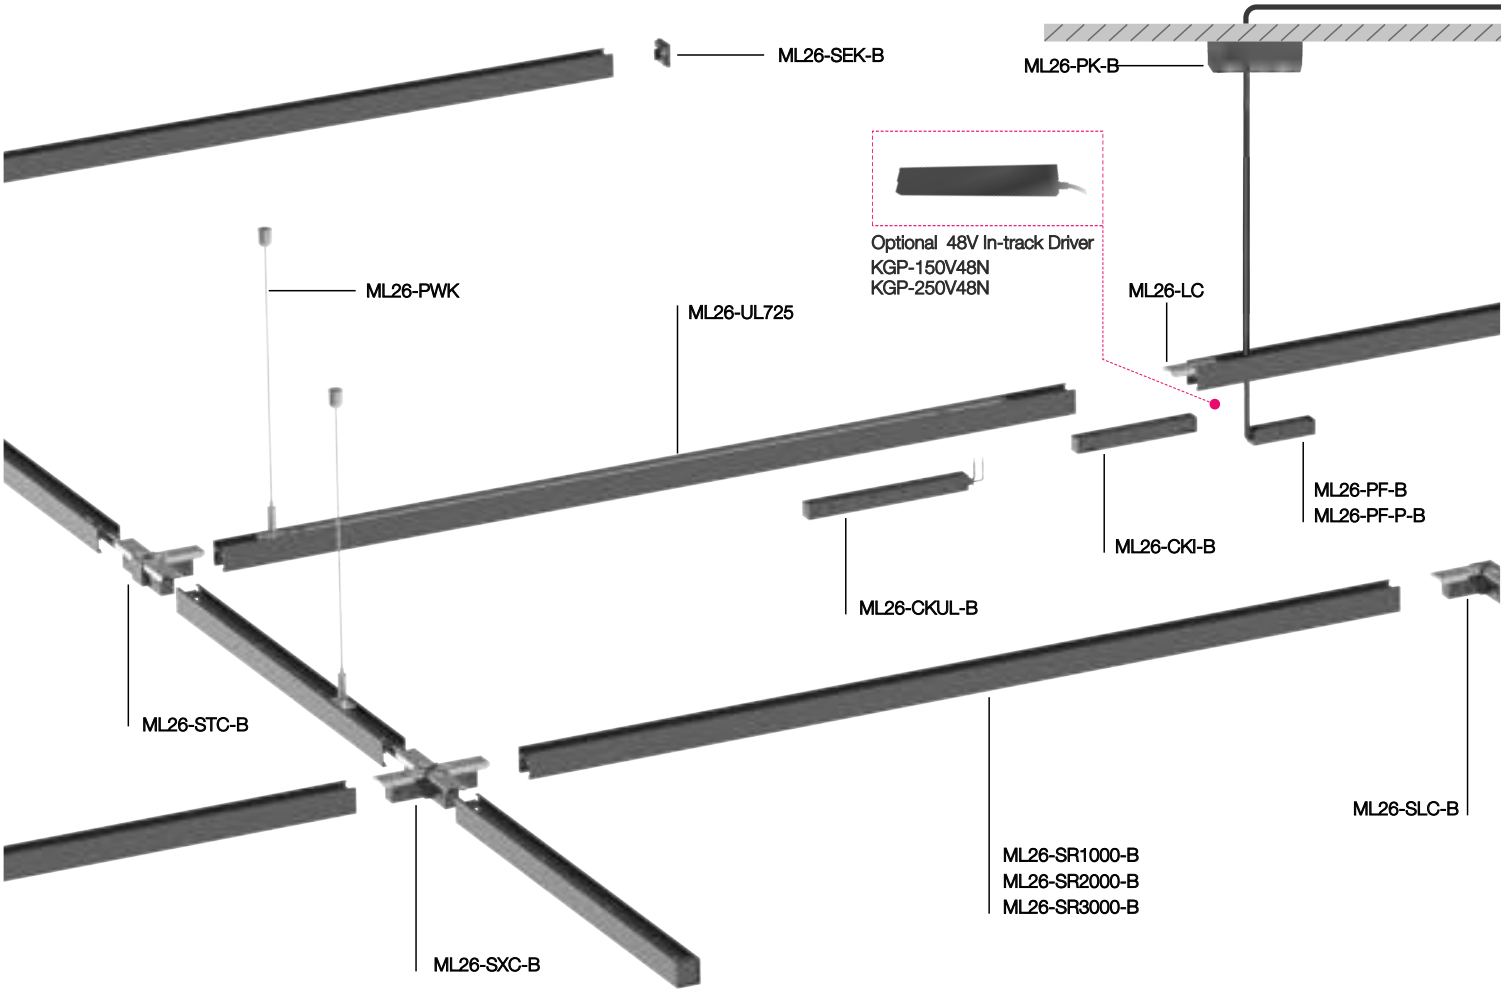

Moduline 26 Slim Track System

Please order installation track rail, light insets and mounting accessories separately.



Slim Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
L x W x H : 1000 x 26 x 27mm	ML26-SR1000-B	ML26-SR1000-W	69,00 €
L x W x H : 2000 x 26 x 27mm	ML26-SR2000-B	ML26-SR2000-W	139,00 €
L x W x H : 3000 x 26 x 27mm	ML26-SR3000-B	ML26-SR3000-W	219,00 €

*Track Rail including endcaps.

Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-SCM-V-B	ML26-SCM-V-W	99,00 €
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-SCM-V-O-B	ML26-SCM-V-O-W	99,00 €
'L' Shape Connector Set, 26 x 26mm	ML26-SLC-B	ML26-SLC-W	99,00 €
'T' Shape Connector Set, 26 x 26mm	ML26-STC-B	ML26-STC-W	105,00 €
'X' Shape Connector Set, 26 x 26mm	ML26-SXC-B	ML26-SXC-W	109,00 €
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-SEK-B	ML26-SEK-W	5,00 €
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W	19,00 €
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W	35,00 €
Linear Connector with screws	ML26-LC	ML26-LC	9,00 €
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W	49,00 €
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W	29,00 €
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK	5,00 €
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W	55,00 €
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK	15,00 €
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-S-100V48N		79,00€
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N		89,00 €
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N		99,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A		199,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A		219,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A		289,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.

Remote 48V LED Driver *(Max. 300W each circuit)*
HLG-100H-48A/ HLG-150H-48A/ HLG-240H-48A

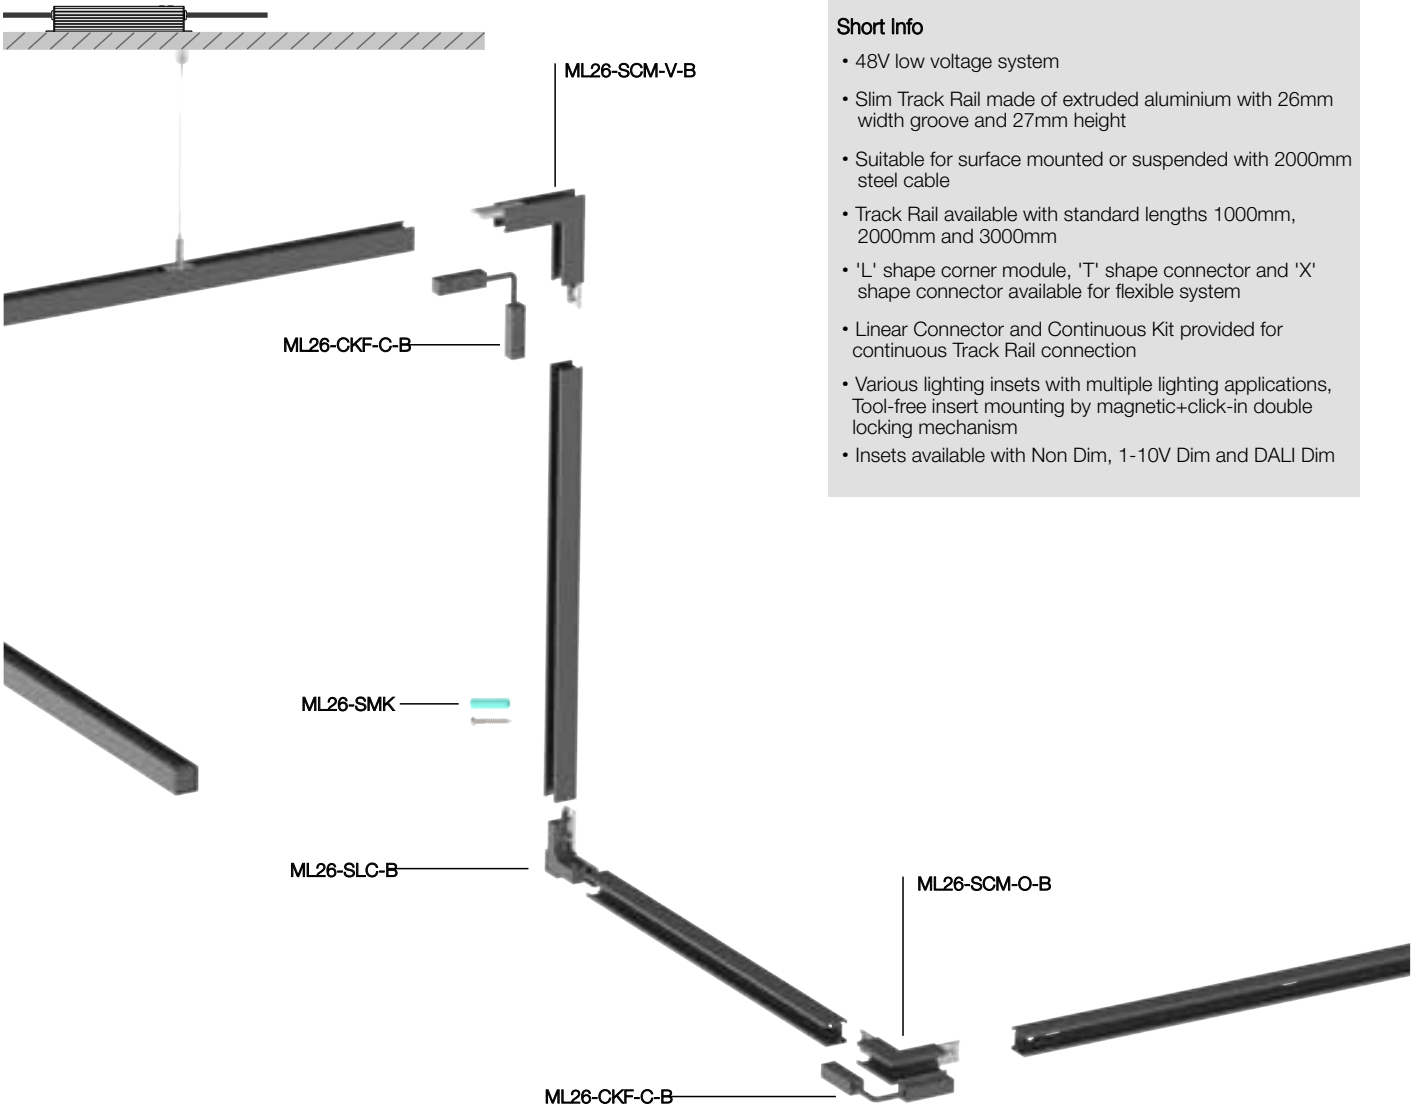

Short Info

- 48V low voltage system
- Slim Track Rail made of extruded aluminium with 26mm width groove and 27mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Standard Track Configuration

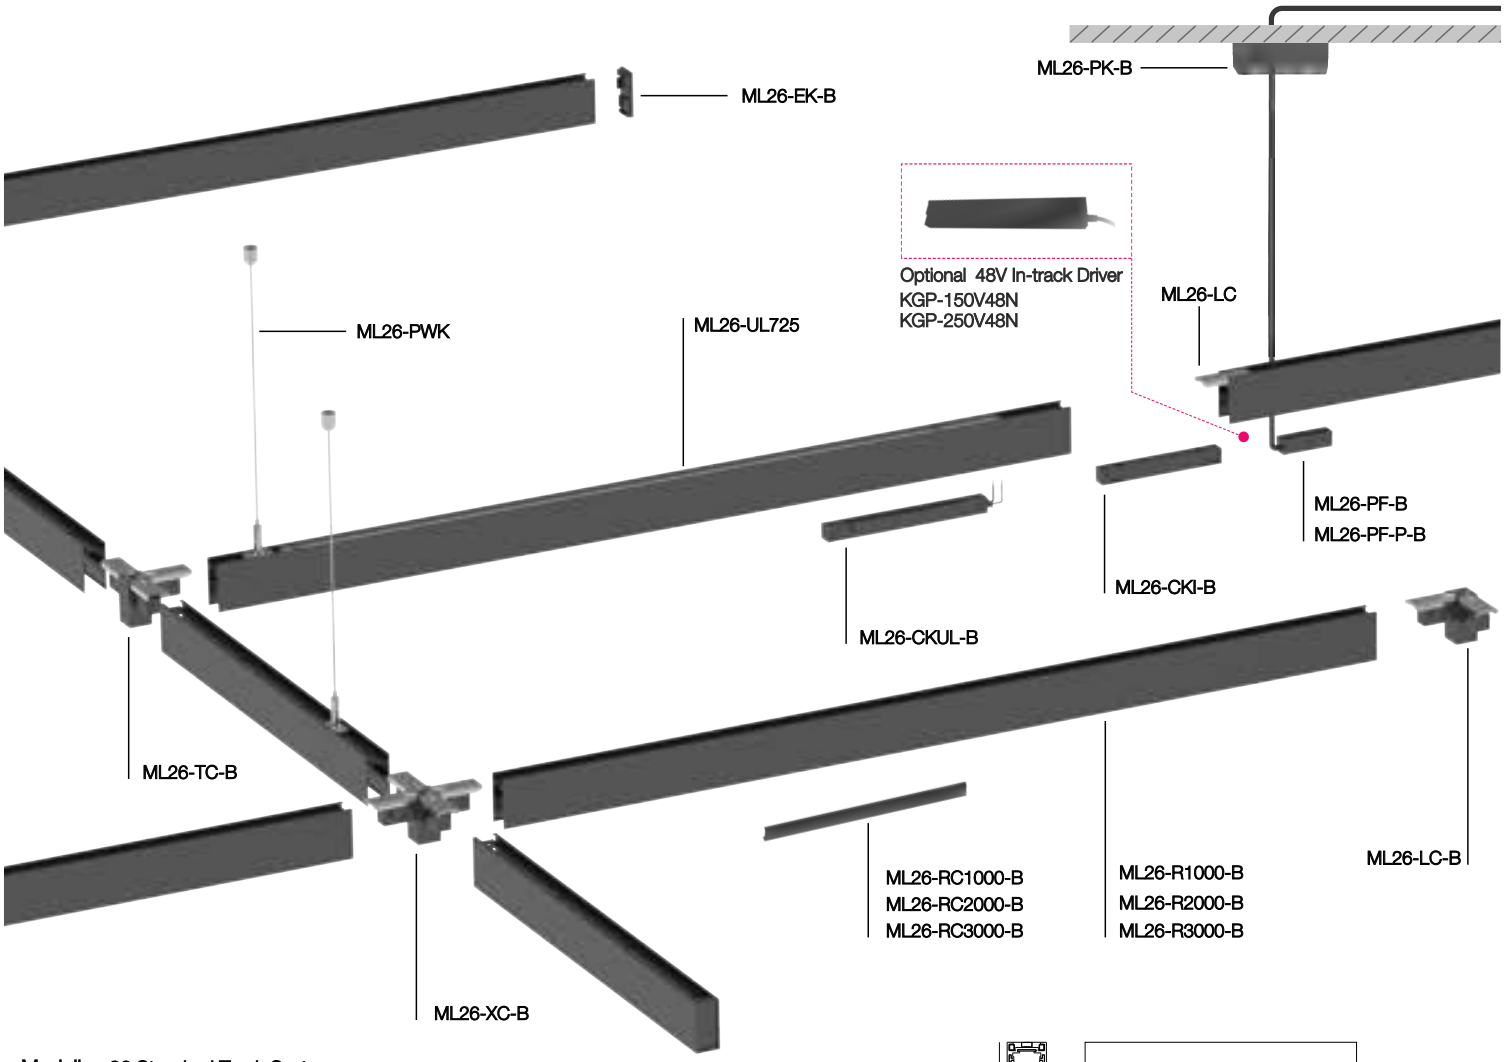

Moduline 26 Standard Track System

Please order installation track rail, light insets and mounting accessories separately.



Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
L x W x H : 1000 x 26 x 52mm	ML26-R1000-B	ML26-R1000-W	79,00 €
L x W x H : 2000 x 26 x 52mm	ML26-R2000-B	ML26-R2000-W	149,00 €
L x W x H : 3000 x 26 x 52mm	ML26-R3000-B	ML26-R3000-W	239,00 €

*Track Rail including endcaps.

Accessories of Standard Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-CM-V-B	ML26-CM-V-W	99,00 €
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-CM-V-O-B	ML26-CM-V-O-W	99,00 €
'L' Shape Connector Set, 26 x 26mm	ML26-LC-B	ML26-LC-W	99,00 €
'T' Shape Connector Set, 26 x 26mm	ML26-TC-B	ML26-TC-W	105,00 €
'X' Shape Connector Set, 26 x 26mm	ML26-XC-B	ML26-XC-W	109,00 €
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-EK-B	ML26-EK-W	5,00 €
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W	19,00 €
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W	35,00 €
Linear Connector with screws	ML26-LC	ML26-LC	9,00 €
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W	49,00 €
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W	29,00 €
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK	5,00 €
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W	55,00 €
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK	15,00 €
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W	15,00 €
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N		79,00 €
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N		89,00 €
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N		99,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A		199,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A		219,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A		289,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.

Remote 48V LED Driver *(Max. 300W each circuit)*
HLG-100H-48A/ HLG-150H-48A/ HLG-240H-48A

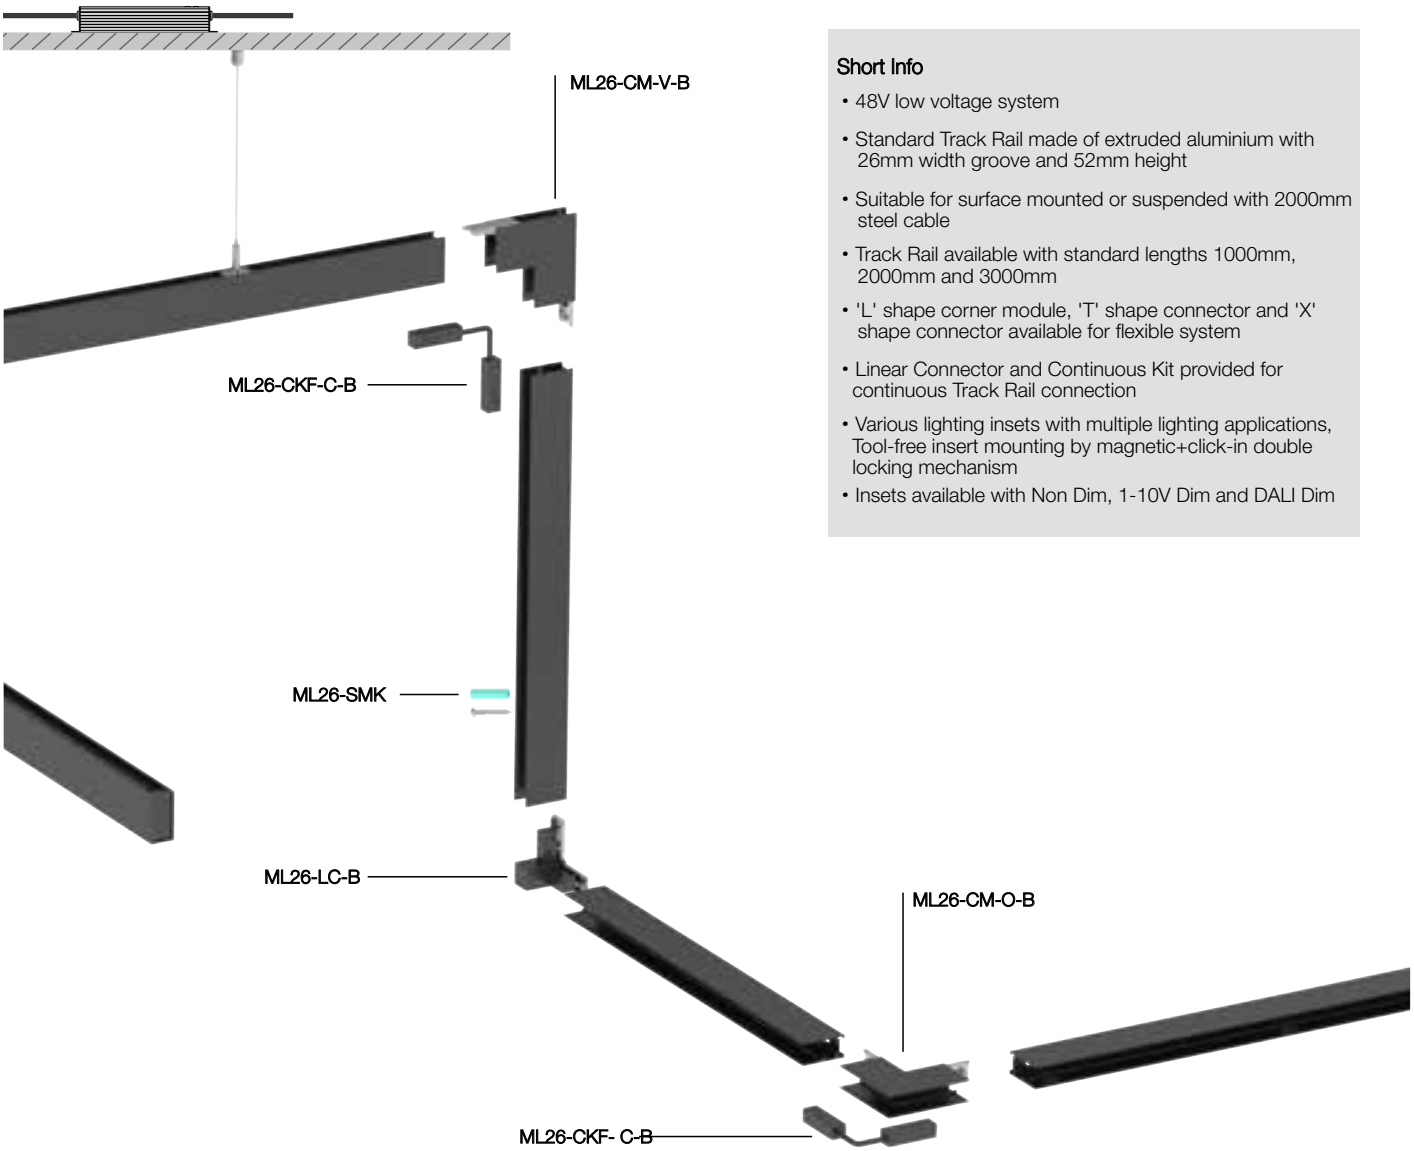

Short Info

- 48V low voltage system
- Standard Track Rail made of extruded aluminium with 26mm width groove and 52mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
H Track Configuration

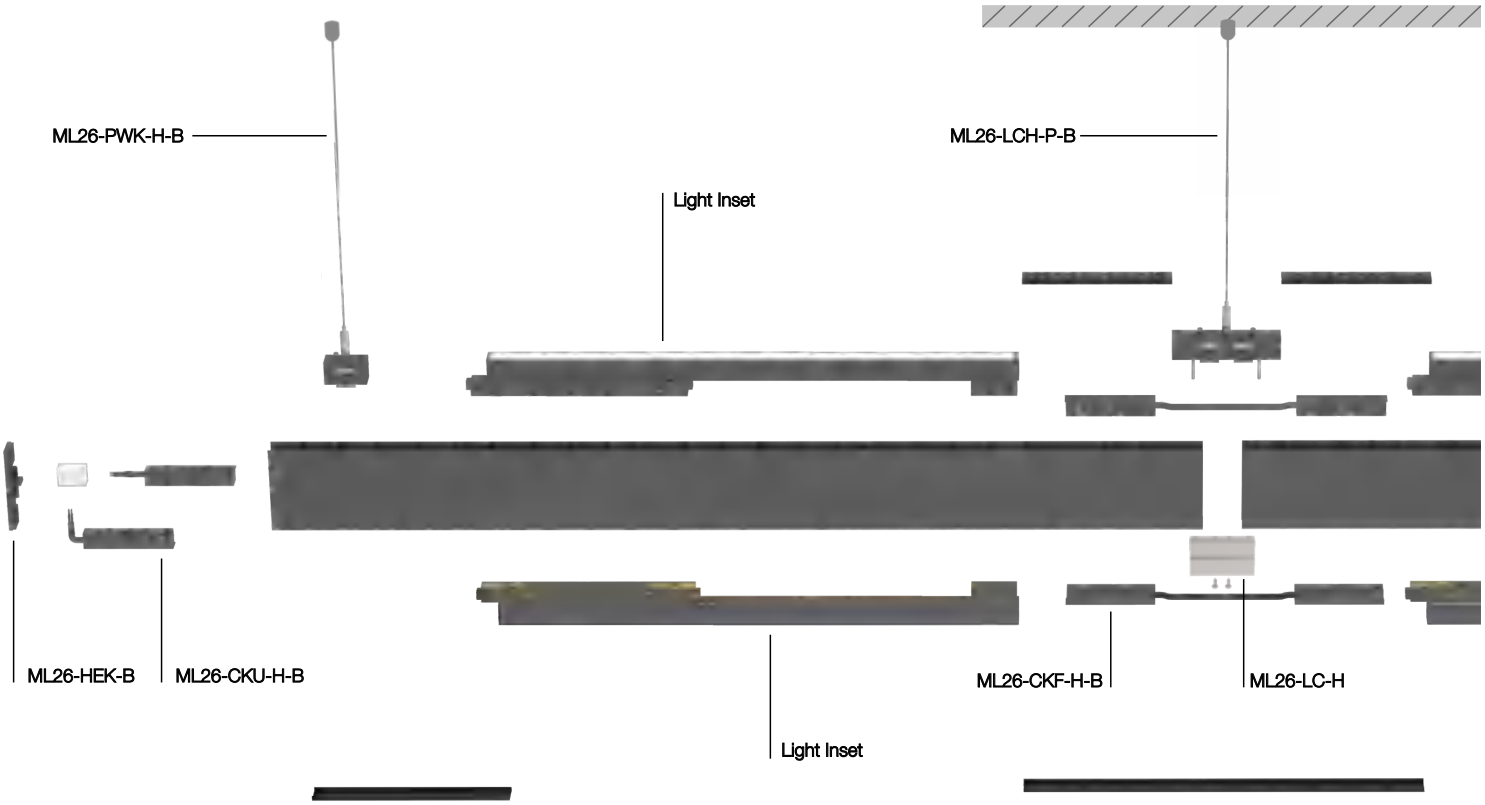

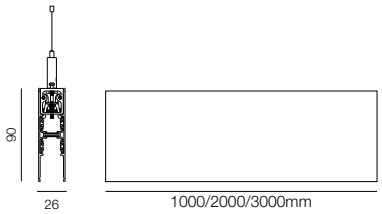

Moduline 26 H Track System

Please order installation track rail, light insets and mounting accessories separately.

Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
L x W x H : 1000 x 26 x 90mm	ML26-HR1000-B	ML26-HR1000-W	119,00 €
L x W x H : 2000 x 26 x 90mm	ML26-HR2000-B	ML26-HR2000-W	229,00 €
L x W x H : 3000 x 26 x 90mm	ML26-HR3000-B	ML26-HR3000-W	339,00 €

*Track Rail including endcaps.

Accessories of H Track System

Endcap Kit (2pcs/ set) of H Track Rail	ML26-HEK-B	ML26-HEK-W	9,00 €
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W	35,00 €
Flexible Continuous Kit, Electrical, for Up Track and Down Track connection	ML26-CKU-H-B	ML26-CKU-H-W	79,00 €
Flexible Continuous Kit, Electrical, for straight connection	ML26-CKF-H-B	ML26-CKF-H-W	59,00 €
Linear Connector with Pendant Kit of H Track System	ML26-LCH-P-B	ML26-LCH-P-W	139,00 €
Linear Connector Kit of H Track System*	ML26-LC-H	ML26-LC-H	9,00 €
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 1pcs H Track Pendant Wire (2000mm) Kits	ML26-PK-H-B	ML26-PK-H-W	69,00 €
H Track Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK-H-B	ML26-PWK-H-W	75,00 €
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W	15,00 €
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N		79,00 €
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N		89,00 €
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N		99,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A		199,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A		219,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A		289,00 €

*Linear Connector Kit needs to be used together with Linear Connector with Pendant Kit

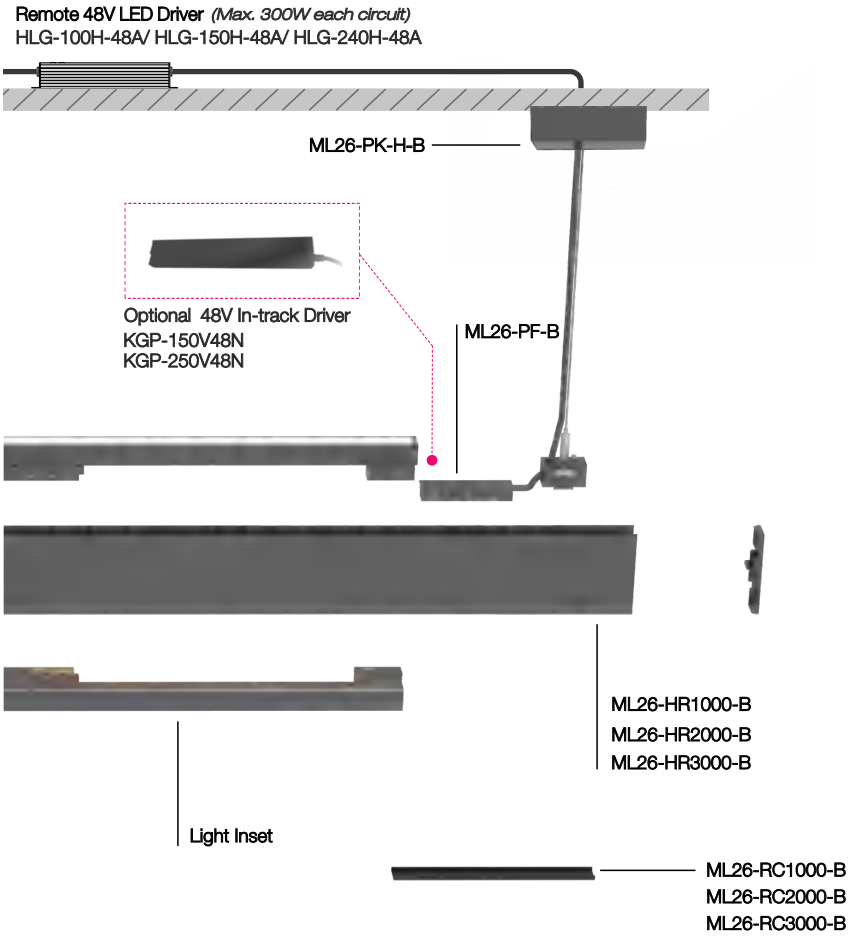

Short Info

- 48V low voltage system
- H Track Rail made of extruded aluminium with 26mm width groove and 90mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System

Trim Recessed Track System

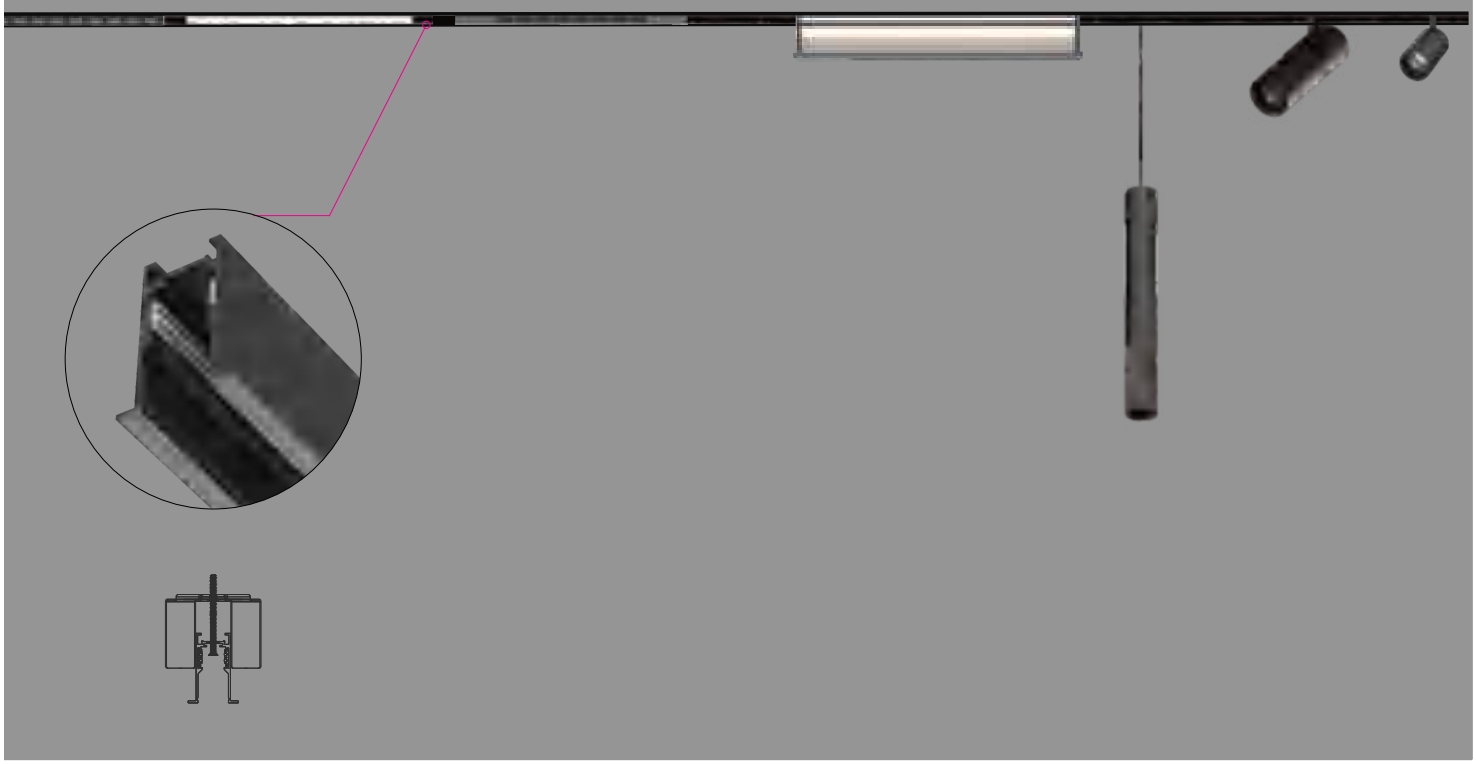

Short Info

·48V low voltage system
·Trim Recessed Track Rail Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from inner track , suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 1000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Short Info

Moduline 26 Trim Recessed Track System

Electrical

Non Dim

1-10V Dim

DALI Dim



Fixture Colour

Black White(Option)



Moduline 26 Trim Recessed Track System

Please order installation track rail, light insets and mounting accessories separately.

Trim Recessed Track System Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
1000	Trim Recessed Track Rail	ML26-FR1000-B	ML26-FR1000-W	149,00 €
2000	Trim Recessed Track Rail	ML26-FR2000-B	ML26-FR2000-W	289,00 €
3000	Trim Recessed Track Rail	ML26-FR3000-B	ML26-FR3000-W	399,00 €

*Track Rail including endcaps.

Accessories of Trim Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
	80x80	(32x28)+(32x28)	Vertical 'L' shape corner module-Inner	ML26-FCM-V-B	ML26-FCM-V-W	139,00 €
	80X80	(32x80)+(32x80)	Vertical 'L' shape corner module-Outer	ML26-FCM-O-B	ML26-FCM-O-W	139,00 €
	80x80	(32x77)+(32x45)	Horizontal 'L' shape corner module	ML26-FCM-B	ML26-FCM-W	139,00 €
	120x80	(32x120)+(32x45)	'T' Shape Connector Set	ML26-FTC-B	ML26-FTC-W	119,00 €
	120X120	(32x120)+(32x120)	'X' Shape Connector Set	ML26-FXC-B	ML26-FXC-W	309,00 €
	Flexible Continuous Kit, Electrical			ML26-CKF-C-B	ML26-CKF-C-W	29,00 €
	*For Corner Connection.					
	Trim Recessed Track Rail Mounting Kit, 2pcs/ set			ML26-FIK	ML26-FIK	19,00 €
	Endcap Kit (2pcs/ set) of Trim Recessed Track			ML26-FEK-B	ML26-FEK-W	19,00 €
	Power Feeder Unit with feeder cables 500mm			ML26-PF-B	ML26-PF-W	19,00 €
	Track Rail Cover 1000mm			ML26-RC1000-B	ML26-RC1000-W	19,00 €
	*Track Rail Cover can be shortened as desired.					
	Linear Connector with screws			ML26-LC	ML26-LC	9,00 €
	Straight Continuous Kit*, Electrical			ML26-CKI-B	ML26-CKI-W	49,00 €
	*Continuous Kit needs to be used together with Linear Connector as a set.					
	48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black			KGP-100V48N		79,00 €
	48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black			KGP-150V48N		89,00 €
	48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black			KGP-250V48N		99,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver			HLG-100H-48A		199,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver			HLG-150H-48A		219,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver			HLG-240H-48A		289,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System

Trimless Recessed Track System-Ceiling Thickness Adjustable

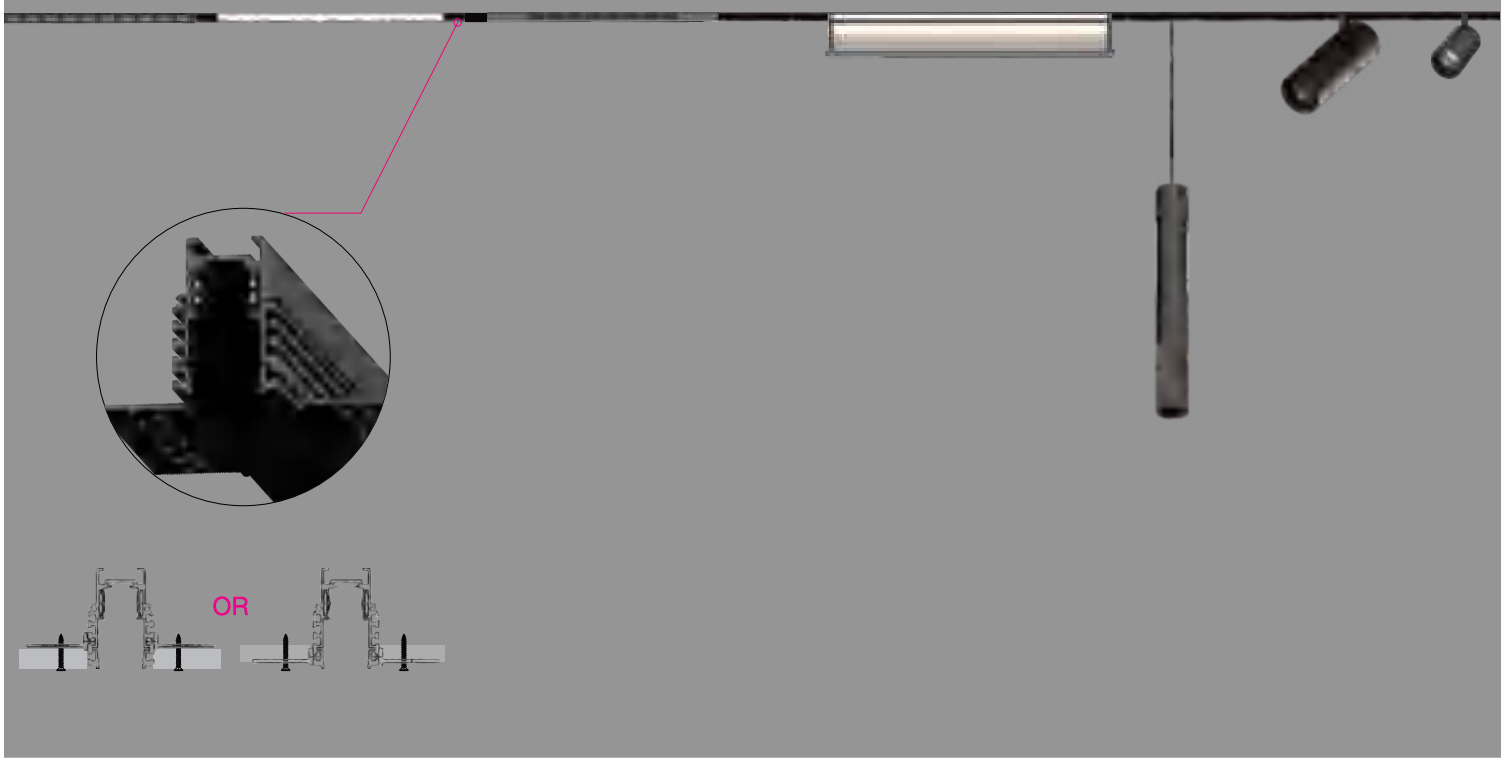

Short Info

·48V low voltage system
·Trimless Recessed Track Rail Version made of extruded aluminium with 35mm width groove and 52mm height
·Suitable for 3mm/5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Short Info

Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable

Electrical
Non Dim
1-10V Dim
DALI Dim



Fixture Colour
Black White(Option)



Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable

Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Ceiling Thickness Adjustable Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
1000	Trimless Recessed Track Rail	ML26-TAR1000-B	ML26-TAR1000-W	119,00 €
2000	Trimless Recessed Track Rail	ML26-TAR2000-B	ML26-TAR2000-W	229,00 €
3000	Trimless Recessed Track Rail	ML26-TAR3000-B	ML26-TAR3000-W	339,00 €

*Track Rail including endcaps.

Accessories of Ceiling Thickness Adjustable Trimless Recessed Track System











L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
80x80	(40x28)+(40x28)	Vertical 'L' shape corner module-Inner	ML26-TACM-V-B	ML26-TACM-V-W	99,00 €
80x80	(40x80)+(40x80)	Vertical 'L' shape corner module-Outer	ML26-TACM-O-B	ML26-TACM-O-W	109,00 €
80x80	(40x82)+(40x42)	Horizontal 'L' shape corner module	ML26-TACM-B	ML26-TACM-W	99,00 €
80x120	(40x120)+(40x42)	'T' Shape Connector Set	ML26-TATC-B	ML26-TATC-W	129,00 €
120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TAXC-B	ML26-TAXC-W	299,00 €

Flexible Continuous Kit, Electrical — ML26-CKF-C-B — ML26-CKF-C-W — 29,00 €

*For Corner Connection.

Endcap Kit (2pcs/ set) of Trim Recessed Track — ML26-TAEK-B — ML26-TAEK-W — 9,00 €

Power Feeder Unit with feeder cables 500mm — ML26-PF-B — ML26-PF-W — 19,00 €

Track Rail Cover 1000mm — ML26-RC1000-B — ML26-RC1000-W — 19,00 €

*Track Rail Cover can be shortened as desired.



Linear Connector with screws — ML26-LC — ML26-LC — 9,00 €
Straight Continuous Kit*, Electrical — ML26-CKI-B — ML26-CKI-W — 49,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.



Trimless Recessed installation kit
1set for 1000mm track — ML26-TAIK — ML26-TAIK — 9,00 €

48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black — KGP-100V48N — 79,00 €
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black — KGP-150V48N — 89,00 €
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black — KGP-250V48N — 99,00 €

48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver — HLG-100H-48A — 199,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver — HLG-150H-48A — 219,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver — HLG-240H-48A — 289,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset

3W 5W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | Intertek



ML26-RS25-3W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48 V	90	2700K	18°	220lm	170lm	MLR0-9271803F-BB
					30°	220lm	170lm	MLR0-9273003F-BB
					45°	220lm	170lm	MLR0-9274503F-BB
				3000K	18°	230lm	180lm	MLR0-9301803F-BB
					30°	230m	180lm	MLR0-9303003F-BB
					45°	230lm	180lm	MLR0-9304503F-BB
				4000K	18°	250lm	190lm	MLR0-9401803F-BB
					30°	250lm	190lm	MLR0-9403003F-BB
					45°	250lm	190lm	MLR0-9404503F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White	Gold
ON-OFF	109,00 €	139,00 €
1-10V Dim	139,00 €	169,00 €
DALI Dim	199,00 €	249,00 €

ML26-RS25-5W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	48 V	90	2700K	18°	420lm	330lm	MLR1-9271805F-BB
					30°	420lm	330lm	MLR1-9273005F-BB
					45°	420lm	330lm	MLR1-9274505F-BB
				3000K	18°	450lm	350lm	MLR1-9301805F-BB
					30°	450lm	350lm	MLR1-9303005F-BB
					45°	450lm	350lm	MLR1-9304505F-BB
				4000K	18°	500lm	380lm	MLR1-9401805F-BB
					30°	500lm	380lm	MLR1-9403005F-BB
					45°	500lm	380lm	MLR1-9404505F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White	Gold
ON-OFF	139,00 €	169,00 €
1-10V Dim	159,00 €	199,00 €
DALI Dim	219,00 €	269,00 €

8W 16W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | Intertek



ML26-RS40-8W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	8W	48 V	90	2700K	18°	700lm	550lm	MLR2-9271808F-BB
					30°	700lm	550lm	MLR2-9273008F-BB
					45°	700lm	400lm	MLR2-9274508F-BB
				3000K	18°	750lm	580lm	MLR2-9301808F-BB
					30°	750lm	580lm	MLR2-9303008F-BB
					45°	750lm	420lm	MLR2-9304508F-BB
				4000K	18°	800lm	640lm	MLR2-9401808F-BB
					30°	800lm	640lm	MLR2-9403008F-BB
					45°	800lm	460lm	MLR2-9404508F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White	Gold
ON-OFF	129,00 €	159,00 €
1-10V Dim	149,00 €	189,00 €
DALI Dim	209,00 €	259,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset

8W 16W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | Intertek





ML26-RS40-16W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
15W	16W	48 V	90	2700K	18°	1400lm	1000lm	MLR3-9271816F-BB
					30°	1400lm	1000lm	MLR3-9273016F-BB
					45°	1400lm	800lm	MLR3-9274516F-BB
				3000K	18°	1500lm	1100lm	MLR3-9301816F-BB
					30°	1500lm	1100lm	MLR3-9303016F-BB
					45°	1500lm	850lm	MLR3-9304516F-BB
				4000K	18°	1600lm	1200lm	MLR3-9401816F-BB
					30°	1600lm	1200lm	MLR3-9403016F-BB
					45°	1600lm	900lm	MLR3-9404516F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White	Gold
ON-OFF	189,00 €	229,00 €
1-10V Dim	209,00 €	259,00 €
DALI Dim	269,00 €	329,00 €

12W 24W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | Intertek



ML26-RS40-12W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48 V	90	2700K	18°	1000lm	700lm	MLR4-9271812F-BB
					30°	1000lm	700lm	MLR4-9273012F-BB
					45°	1000lm	550lm	MLR4-9274512F-BB
				3000K	18°	1100lm	750lm	MLR4-9301812F-BB
					30°	1100lm	750lm	MLR4-9303012F-BB
					45°	1100lm	600lm	MLR4-9304512F-BB
				4000K	18°	1200lm	800lm	MLR4-9401812F-BB
					30°	1200lm	800lm	MLR4-9403012F-BB
					45°	1200lm	650lm	MLR4-9404512F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White	Gold
ON-OFF	129,00 €	169,00 €
1-10V Dim	159,00 €	199,00 €
DALI Dim	209,00 €	269,00 €

ML26-RS40-24W

22W	24W	48 V	90	2700K	18°	2000lm	1400lm	MLR5-9271824F-BB
					30°	2000lm	1400lm	MLR5-9273024F-BB
					45°	2000lm	1100lm	MLR5-9274524F-BB
				3000K	18°	2200lm	1500lm	MLR5-9301824F-BB
					30°	2200lm	1500lm	MLR5-9303024F-BB
					45°	2200lm	1200lm	MLR5-9304524F-BB
				4000K	18°	2400lm	1600lm	MLR5-9401824F-BB
					30°	2400lm	1600lm	MLR5-9403024F-BB
					45°	2400lm	1300lm	MLR5-9404524F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White	Gold
ON-OFF	199,00 €	249,00 €
1-10V Dim	219,00 €	279,00 €
DALI Dim	279,00 €	349,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset

10W | CRI90 | 2700K 3000K 4000K | 20°-40° 35°-60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



ML26-RT55-10W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48 V	90	2700K	20°-40°	1200lm	1000lm	MLR6-927Z410F-BB
					35°-60°	1200lm	950lm	MLR6-927Z610F-BB
				3000K	20°-40°	1300lm	1100lm	MLR6-930Z410F-BB
					35°-60°	1300lm	1000lm	MLR6-930Z610F-BB
				4000K	20°-40°	1400lm	1200lm	MLR6-940Z410F-BB
					35°-60°	1400lm	1100lm	MLR6-940Z610F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White
ON-OFF	159,00 €
1-10V Dim	189,00 €
DALI Dim	239,00 €

19W 26W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



ML26-RS72-19W
ML26-RS72-26W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48 V	90	2700K	20°	1800lm	1500lm	MLR7-9272019F-BB
					35°	1800lm	1600lm	MLR7-9273519F-BB
					55°	1800lm	1600lm	MLR7-9275519F-BB
				3000K	20°	1900lm	1600lm	MLR7-9302019F-BB
					35°	1900lm	1700lm	MLR7-9303519F-BB
					55°	1900lm	1700lm	MLR7-9305519F-BB
				4000K	20°	2100lm	1700lm	MLR7-9402019F-BB
					35°	2100lm	1800lm	MLR7-9403519F-BB
					55°	2100lm	1800lm	MLR7-9405519F-BB
25W	26W	48 V	90	2700K	20°	2500lm	2100lm	MLR7-9272026F-BB
					35°	2500lm	2300lm	MLR7-9273526F-BB
					55°	2500lm	2300lm	MLR7-9275526F-BB
				3000K	20°	2700lm	2200lm	MLR7-9302026F-BB
					35°	2700lm	2400lm	MLR7-9303526F-BB
					55°	2700lm	2400lm	MLR7-9305526F-BB
				4000K	20°	2900lm	2400lm	MLR7-9402026F-BB
					35°	2900lm	2600lm	MLR7-9403526F-BB
					55°	2900lm	2600lm	MLR7-9405526F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White
ON-OFF	199,00 €
1-10V Dim	219,00 €
DALI Dim	279,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset

NEW

9W | CRI90 | 2700K 3000K 4000K | 15° 25° 35° | CITIZEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB CE | Intertek





ML26-RS96-10W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48 V	90	2700K	15°	900lm	700lm	MLR9-9271509F-BN
					25°	900lm	720lm	MLR9-9272509F-BN
					35°	900lm	720lm	MLR9-9273509F-BN
				3000K	15°	950lm	720lm	MLR9-9301509F-BN
					25°	950lm	750lm	MLR9-9302509F-BN
					35°	950lm	750lm	MLR9-9303509F-BN
				4000K	15°	1050lm	780lm	MLR9-9401509F-BN
					25°	1050lm	830lm	MLR9-9402509F-BN
					35°	1050lm	830lm	MLR9-9403509F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White	Gold
ON-OFF	139,00 €	179,00 €
1-10V Dim	159,00 €	209,00 €
DALI Dim	229,00 €	289,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset

NEW

10W | CRI90 | 2700K 3000K 4000K | 25° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | Intertek



Specular Reflector

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BS
					36°	900lm	650lm	MLF1-9273610F-BS
					50°	900lm	650lm	MLF1-9275010F-BS
				3000K	25°	950lm	650lm	MLF1-9302510F-BS
					36°	950m	700lm	MLF1-9303610F-BS
					50°	950lm	700lm	MLF1-9305010F-BS
				4000K	25°	1050lm	700lm	MLF1-9402510F-BS
					36°	1050lm	780lm	MLF1-9403610F-BS
					50°	1050lm	780lm	MLF1-9405010F-BS

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Matt Reflector

9W	10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BM
					36°	900lm	650lm	MLF1-9273610F-BM
					50°	900lm	650lm	MLF1-9275010F-BM
				3000K	25°	950lm	650lm	MLF1-9302510F-BM
					36°	950m	700lm	MLF1-9303610F-BM
					50°	950lm	700lm	MLF1-9305010F-BM
				4000K	25°	1050lm	700lm	MLF1-9402510F-BM
					36°	1050lm	780lm	MLF1-9403610F-BM
					50°	1050lm	780lm	MLF1-9405010F-BM

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Black Reflector

9W	10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BB
					36°	900lm	650lm	MLF1-9273610F-BB
					50°	900lm	650lm	MLF1-9275010F-BB
				3000K	25°	950lm	650lm	MLF1-9302510F-BB
					36°	950m	700lm	MLF1-9303610F-BB
					50°	950lm	700lm	MLF1-9305010F-BB
				4000K	25°	1050lm	700lm	MLF1-9402510F-BB
					36°	1050lm	780lm	MLF1-9403610F-BB
					50°	1050lm	780lm	MLF1-9405010F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Dark Light Reflector

9W	10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BC
					36°	900lm	650lm	MLF1-9273610F-BC
					50°	900lm	650lm	MLF1-9275010F-BC
				3000K	25°	950lm	650lm	MLF1-9302510F-BC
					36°	950m	700lm	MLF1-9303610F-BC
					50°	950lm	700lm	MLF1-9305010F-BC
				4000K	25°	1050lm	700lm	MLF1-9402510F-BC
					36°	1050lm	780lm	MLF1-9403610F-BC
					50°	1050lm	780lm	MLF1-9405010F-BC

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

White Reflector

9W	10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BW
					36°	900lm	650lm	MLF1-9273610F-BW
					50°	900lm	650lm	MLF1-9275010F-BW
				3000K	25°	950lm	650lm	MLF1-9302510F-BW
					36°	950m	700lm	MLF1-9303610F-BW
					50°	950lm	700lm	MLF1-9305010F-BW
				4000K	25°	1050lm	700lm	MLF1-9402510F-BW
					36°	1050lm	780lm	MLF1-9403610F-BW
					50°	1050lm	780lm	MLF1-9405010F-BW

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White	Gold
ON-OFF	149,00 €	189,00 €
1-10V Dim	169,00 €	219,00 €
DALI Dim	229,00 €	299,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Spotlight Inset

NEW

20W | CRI90 | 2700K 3000K 4000K | 25° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | Intertek



Specular Reflector

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BS
					36°	1800lm	1300lm	MLF2-9273620F-BS
					50°	1800lm	1300lm	MLF2-9275020F-BS
				3000K	25°	1900lm	1300lm	MLF2-9302520F-BS
					36°	1900m	1400lm	MLF2-9303620F-BS
					50°	1900lm	1400lm	MLF2-9305020F-BS
				4000K	25°	2100lm	1400lm	MLF2-9402520F-BS
					36°	2100lm	1550lm	MLF2-9403620F-BS
					50°	2100lm	1550lm	MLF2-9405020F-BS

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Matt Reflector

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BM
					36°	1800lm	1300lm	MLF2-9273620F-BM
					50°	1800lm	1300lm	MLF2-9275020F-BM
				3000K	25°	1900lm	1300lm	MLF2-9302520F-BM
					36°	1900m	1400lm	MLF2-9303620F-BM
					50°	1900lm	1400lm	MLF2-9305020F-BM
				4000K	25°	2100lm	1400lm	MLF2-9402520F-BM
					36°	2100lm	1550lm	MLF2-9403620F-BM
					50°	2100lm	1550lm	MLF2-9405020F-BM

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Black Reflector

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BB
					36°	1800lm	1300lm	MLF2-9273620F-BB
					50°	1800lm	1300lm	MLF2-9275020F-BB
				3000K	25°	1900lm	1300lm	MLF2-9302520F-BB
					36°	1900m	1400lm	MLF2-9303620F-BB
					50°	1900lm	1400lm	MLF2-9305020F-BB
				4000K	25°	2100lm	1400lm	MLF2-9402520F-BB
					36°	2100lm	1550lm	MLF2-9403620F-BB
					50°	2100lm	1550lm	MLF2-9405020F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Dark Light Reflector

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BC
					36°	1800lm	1300lm	MLF2-9273620F-BC
					50°	1800lm	1300lm	MLF2-9275020F-BC
				3000K	25°	1900lm	1300lm	MLF2-9302520F-BC
					36°	1900m	1400lm	MLF2-9303620F-BC
					50°	1900lm	1400lm	MLF2-9305020F-BC
				4000K	25°	2100lm	1400lm	MLF2-9402520F-BC
					36°	2100lm	1550lm	MLF2-9403620F-BC
					50°	2100lm	1550lm	MLF2-9405020F-BC

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

White Reflector

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BW
					36°	1800lm	1300lm	MLF2-9273620F-BW
					50°	1800lm	1300lm	MLF2-9275020F-BW
				3000K	25°	1900lm	1300lm	MLF2-9302520F-BW
					36°	1900m	1400lm	MLF2-9303620F-BW
					50°	1900lm	1400lm	MLF2-9305020F-BW
				4000K	25°	2100lm	1400lm	MLF2-9402520F-BW
					36°	2100lm	1550lm	MLF2-9403620F-BW
					50°	2100lm	1550lm	MLF2-9405020F-BW

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black / White	Gold
ON-OFF	259,00 €	339,00 €
1-10V Dim	279,00 €	369,00 €
DALI Dim	339,00 €	439,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Accent Light Inset

3W 7W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB CE | Intertek



LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48 V	90	2700K	20°	230lm	170lm	MLA3-9272003F-BB
					35°	230lm	170lm	MLA3-9273503F-BB
					55°	230lm	160lm	MLA3-9275503F-BB
				3000K	20°	250lm	180lm	MLA3-9302003F-BB
					35°	250lm	180lm	MLA3-9303503F-BB
					55°	250lm	170lm	MLA3-9305503F-BB
				4000K	20°	270lm	200lm	MLA3-9402003F-BB
					35°	270lm	200lm	MLA3-9403503F-BB
					55	270lm	190lm	MLA3-9405503F-BB

Black / White	
ON-OFF	109,00 €
1-10V Dim	129,00 €
DALI Dim	179,00 €

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	20°	700lm	500lm	MLA4-9272007F-BB
					35°	700lm	500lm	MLA4-9273507F-BB
					55°	700lm	470lm	MLA4-9275507F-BB
				3000K	20°	750lm	550lm	MLA4-9302007F-BB
					35°	750lm	550lm	MLA4-9303507F-BB
					55°	750lm	500lm	MLA4-9305507F-BB
				4000K	20°	820lm	600lm	MLA4-9402007F-BB
					35°	820lm	600lm	MLA4-9403507F-BB
					55°	820lm	550lm	MLA4-9405507F-BB

Black / White	
ON-OFF	139,00 €
1-10V Dim	159,00 €
DALI Dim	209,00 €

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

9W 13W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB CE | Intertek



LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48 V	90	2700K	20°	950lm	700lm	MLA1-9272009F-BB
					35°	950lm	700lm	MLA1-9273509F-BB
					55°	950lm	650lm	MLA1-9275509F-BB
				3000K	20°	1000lm	750lm	MLA1-9302009F-BB
					35°	1000lm	750lm	MLA1-9303509F-BB
					55°	1000lm	680lm	MLA1-9305509F-BB
				4000K	20°	1100lm	800lm	MLA1-9402009F-BB
					35°	1100lm	800lm	MLA1-9403509F-BB
					55°	1100lm	750lm	MLA1-9405509F-BB

Black / White	
ON-OFF	179,00 €
1-10V Dim	199,00 €
DALI Dim	259,00 €

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48 V	90	2700K	20°	1400lm	1000lm	MLA2-9272013F-BB
					35°	1400lm	1000lm	MLA2-9273513F-BB
					55°	1400lm	950lm	MLA2-9275513F-BB
				3000K	20°	1500lm	1100lm	MLA2-9302013F-BB
					35°	1500lm	1100lm	MLA2-9303513F-BB
					55°	1500lm	1000lm	MLA2-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA2-9402013F-BB
					35°	1600lm	1200lm	MLA2-9403513F-BB
					55°	1600lm	1100lm	MLA2-9405513F-BB

Black / White	
ON-OFF	199,00 €
1-10V Dim	219,00 €
DALI Dim	279,00 €

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

13W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 90° 90° | 5 YEARS GUARANTEE | CB CE | Intertek



LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48 V	90	2700K	20°	1400lm	1000lm	MLA5-9272013F-BB
					35°	1400lm	1000lm	MLA5-9273513F-BB
					55°	1400lm	950lm	MLA5-9275513F-BB
				3000K	20°	1500lm	1100lm	MLA5-9302013F-BB
					35°	1500lm	1100lm	MLA5-9303513F-BB
					55°	1500lm	1000lm	MLA5-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA5-9403513F-BB
					35	1600lm	1200lm	MLA5-9403513F-BB
					55	1600lm	1100lm	MLA5-9405513F-BB

Black / White	
ON-OFF	239,00 €
1-10V Dim	259,00 €
DALI Dim	319,00 €

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Accent Light Inset

NEW

14W | CRI90 | 2700K 3000K 4000K | 30° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | Intertek



ML26-AA315-14W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
13W	14W	48 V	90	2700K	30°	1200lm	1050lm	MLA7-9273014F-BB
				3000K	30°	1400lm	1100lm	MLA7-9303014F-BB
				4000K	30°	1500lm	1200lm	MLA7-9403014F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Black	
ON-OFF	159,00 €
1-10V Dim	179,00 €
DALI Dim	239,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
General Light Inset

10W | CRI90 | 2700K 3000K 4000K | 120° | OSRAM 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB | CE | Intertek





ML26-AG315-10W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48 V	90	2700K	120°	750lm	500lm	MLG6-927A210F-BB
				3000K	120°	800lm	550lm	MLG6-930A210F-BB
				4000K	120°	850lm	600lm	MLG6-940A210F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Black	
ON-OFF	169,00 €
1-10V Dim	189,00 €
DALI Dim	249,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
General Light Inset

7W 13W | CRI90 | 2700K 3000K 4000K | 110° | SAMSUNG 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek



ML26-GL280-7W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	110°	550lm	430lm	MLG1-927A107F-BN
				3000K	110°	600lm	400lm	MLG1-930A107F-BN
				4000K	110°	650lm	450lm	MLG1-940A107F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Black / White	
ON-OFF	109,00 €
1-10V Dim	129,00 €
DALI Dim	179,00 €

ML26-GL560-13W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48 V	90	2700K	110°	1100lm	750lm	MLG2-927A113F-BN
				3000K	110°	1200lm	800lm	MLG2-930A113F-BN
				4000K	110°	1300lm	900lm	MLG2-940A113F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Black / White	
ON-OFF	139,00 €
1-10V Dim	159,00 €
DALI Dim	219,00 €

ML26-GL840-19W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18 W	19 W	48 V	90	2700K	110°	1700lm	1100lm	MLG3-927A119F-BN
				3000K	110°	1800lm	1200lm	MLG3-930A119F-BN
				4000K	110°	1900lm	1300lm	MLG3-940A119F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Black / White	
ON-OFF	169,00 €
1-10V Dim	189,00 €
DALI Dim	249,00 €

ML26-GL1120-26W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	48 V	90	2700K	110°	2200lm	1500lm	MLG4-927A126F-BN
				3000K	110°	2400lm	1600lm	MLG4-930A126F-BN
				4000K	110°	2600lm	1700lm	MLG4-940A126F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Black / White	
ON-OFF	199,00 €
1-10V Dim	219,00 €
DALI Dim	279,00 €

7W | CRI90 | 2700K 3000K 4000K | 110° | SAMSUNG 50,000h@L80B10 | IP20 | 90° 90° | 5 YEARS GUARANTEE | CB CE | ETL Intertek



ML26-SG280-7W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	110°	550lm	430lm	MLG5-927A107F-BN
				3000K	110°	600lm	400lm	MLG5-930A107F-BN
				4000K	110°	650lm	450lm	MLG5-940A107F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Black / White	
ON-OFF	159,00 €
1-10V Dim	179,00 €
DALI Dim	239,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Pendant Spot Inset

12W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

ML26-PS40-12W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48 V	90	2700K	18°	1000lm	700lm	MLP1-9271812F-BB
					30°	1000lm	700lm	MLP1-9273012F-BB
					45°	1000lm	550lm	MLP1-9274512F-BB
				3000K	18°	1100lm	750lm	MLP1-9301812F-BB
					30°	1100lm	750lm	MLP1-9303012F-BB
					45°	1100lm	600lm	MLP1-9304512F-BB
				4000K	18°	1200lm	800lm	MLP1-9401812F-BB
					30°	1200lm	800lm	MLP1-9403012F-BB
					45°	1200lm	650lm	MLP1-9404512F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black /White	Gold
ON-OFF	189,00 €	239,00 €
1-10V Dim	209,00 €	269,00 €
DALI Dim	269,00 €	339,00 €

14W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

ML26-PS55-14W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
13W	14W	48 V	90	2700K	18°	1100lm	900lm	MLP2-9271814F-BB
					24°	1100lm	900lm	MLP2-9272414F-BB
					36°	1100lm	750lm	MLP2-9273614F-BB
				3000K	18°	1200lm	950lm	MLP2-9301814F-BB
					24°	1200lm	950lm	MLP2-9302414F-BB
					36°	1200lm	800lm	MLP2-9303612F-BB
				4000K	18°	1300lm	1000lm	MLP2-9401814F-BB
					24°	1300lm	1000lm	MLP2-9402414F-BB
					36°	1300lm	850lm	MLP2-9403614F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black /White	Gold
ON-OFF	179,00 €	219,00 €
1-10V Dim	199,00 €	249,00 €
DALI Dim	259,00 €	319,00 €

5W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° 50° | OSRAM 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB CE | ETL Intertek

! NEW

ML26-PS60-5W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4.5W	5W	48 V	90	2700K	18°	470lm	370lm	MLP3-9271805F-BB
					24°	470lm	370lm	MLP3-9272405F-BB
					36°	470lm	370lm	MLP3-9273605F-BB
					50°	470lm	370lm	MLP3-9275005F-BB
				3000K	18°	500lm	400lm	MLP3-9301805F-BB
					24°	500lm	400lm	MLP3-9302405F-BB
					36°	500lm	400lm	MLP3-9303605F-BB
					50°	500lm	400lm	MLP3-9305005F-BB
				4000K	18°	550lm	450lm	MLP3-9401805F-BB
					24°	550lm	450lm	MLP3-9402405F-BB
					36°	550lm	450lm	MLP3-9403605F-BB
					50°	550lm	450lm	MLP3-9405005F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black /White
ON-OFF	179,00 €
1-10V Dim	199,00 €
DALI Dim	259,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Pendant Spot Inset

NEW

12W | CRI90 | 2700K 3000K 4000K | 110° | OSRAM 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

ML26-PAD150-12W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48 V	90	2700K	110°	900lm	720lm	MLPA-927A112F-BN
				3000K	110°	950lm	750lm	MLPA-930A112F-BN
				4000K	110°	1050lm	800lm	MLPA-940A112F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black /White	Gold
ON-OFF	129,00 €	169,00 €
1-10V Dim	149,00 €	189,00 €
DALI Dim	209,00 €	279,00 €

18W | CRI90 | 2700K 3000K 4000K | 60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W	18W	48 V	90	2700K	60°	1600lm	1050lm	MLPD-9276018F-BB-H
				3000K	60°	1700lm	1100lm	MLPD-9306018F-BB-H
				4000K	60°	1800lm	1200lm	MLPD-9406018F-BB-H

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

17W	18W	48 V	90	2700K	60°	1600lm	1050lm	MLPD-9276018F-BW-H
				3000K	60°	1700lm	1100lm	MLPD-9306018F-BW-H
				4000K	60°	1800lm	1200lm	MLPD-9406018F-BW-H

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black /White
ON-OFF	169,00 €
1-10V Dim	189,00 €
DALI Dim	249,00 €

10W | CRI90 | 2700K 3000K 4000K | 180° | CITIZEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

ML26-PB120-10W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48 V	90	2700K	180°	900lm	620lm	MLPB-927A810F-BN
				3000K	180°	950lm	650lm	MLPB-930A810F-BN
				4000K	180°	1050lm	700lm	MLPB-940A810F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black /White
ON-OFF	159,00 €
1-10V Dim	179,00 €
DALI Dim	239,00 €

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System
Wall Washer Inset

7W 13W | CRI90 | 2700K 3000K 4000K | SAMSUNG 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CB | CE | Intertek





LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	Wall Washer	550lm	330lm	MLW1-927A107F-BM
				3000K	Wall Washer	600lm	350lm	MLW1-930A107F-BM
				4000K	Wall Washer	650lm	400lm	MLW1-940A107F-BM

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black /White
ON-OFF	119,00 €
1-10V Dim	149,00 €
DALI Dim	199,00 €



12W	13W	48 V	90	2700K	Wall Washer	1100lm	670lm	MLW2-927A113F-BM
				3000K	Wall Washer	1200lm	700lm	MLW2-930A113F-BM
				4000K	Wall Washer	1300lm	750lm	MLW2-940A113F-BM

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black /White
ON-OFF	159,00 €
1-10V Dim	179,00 €
DALI Dim	239,00 €

NEKO / MINT 280 - Standard
LED Ceiling Light

NEW

13W/18W/24W Power Switchable | CRI80 | 2700K/3000K/4000K CCT Switchable | 120° | IP54 | IK10 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	13 W	78 V	155 mA	80	2700K	120°	1600lm	1350lm	MASM-8S3A224F-WN
					3000K	120°	1700lm	1400lm	
					4000K	120°	1800lm	1500lm	
16 W	18 W	78 V	200 mA	80	2700K	120°	2000lm	1700lm	MASM-8S3A224F-WN
					3000K	120°	2100lm	1800lm	
					4000K	120°	2200lm	1900lm	
22 W	24 W	78 V	280 mA	80	2700K	120°	2400lm	2100lm	MASM-8S3A224F-WN
					3000K	120°	2550lm	2200lm	
					4000K	120°	2600lm	2350lm	

Code Remark: F=(On-Off LED Driver, Power Switchable)

ON-OFF | 89,00 €

NEKO / MINT 280 - ON-OFF + Microwave Sensor
LED Ceiling Light

NEW

13W/18W/24W Power Switchable | CRI80 | 2700K/3000K/4000K CCT Switchable | 120° | IP54 | IK10 | 5 YEARS GUARANTEE | CE | Microwave Sensor



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	13 W	78 V	155 mA	80	2700K	120°	1600lm	1350lm	MASM-8S3A224S-WN
					3000K	120°	1700lm	1400lm	
					4000K	120°	1800lm	1500lm	
16 W	18 W	78 V	200 mA	80	2700K	120°	2000lm	1700lm	MASM-8S3A224S-WN
					3000K	120°	2100lm	1800lm	
					4000K	120°	2200lm	1900lm	
22 W	24 W	78 V	280 mA	80	2700K	120°	2400lm	2100lm	MASM-8S3A224S-WN
					3000K	120°	2550lm	2200lm	
					4000K	120°	2600lm	2350lm	

Code Remark: S=(On-Off LED Driver+Microwave Sensor)

ON-OFF | 139,00 €

NEKO / MINT 280 - ON-OFF + Emergency Version
LED Ceiling Light

NEW

13W/18W/24W Power Switchable | CRI80 | 2700K/3000K/4000K CCT Switchable | 120° | IP54 | IK10 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	13 W	78 V	155 mA	80	2700K	120°	1600lm	1350lm	MASM-8S3A224E-WN
					3000K	120°	1700lm	1400lm	
					4000K	120°	1800lm	1500lm	
16 W	18 W	78 V	200 mA	80	2700K	120°	2000lm	1700lm	MASM-8S3A224F-WN
					3000K	120°	2100lm	1800lm	
					4000K	120°	2200lm	1900lm	
22 W	24 W	78 V	280 mA	80	2700K	120°	2400lm	2100lm	MASM-8S3A224F-WN
					3000K	120°	2550lm	2200lm	
					4000K	120°	2600lm	2350lm	

Emergency lighting duration : 120mins
Emergency power : 5W

Code Remark: E=(On-Off LED Driver+Emergency Backup)

ON-OFF | 149,00 €

NEKO / GINGER 400
Ceiling Light System
Incl. Phase Dim Driver

30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130P-WN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130P-WN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130P-WN

Code Remark: P=(Phase Dim)

28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130P-BN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130P-BN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130P-BN

Code Remark: P=(Phase Dim)

Phase Dim	199,00 €

NEKO / GINGER 400
Ceiling Light System
ON-OFF Driver + Microwave Sensor

30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE | Microwave Sensor



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130S-WN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130S-WN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130S-WN

Code Remark: S=On-Off LED Driver+Microwave Sensor

28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130S-BN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130S-BN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130S-BN

Code Remark: S=On-Off LED Driver+Microwave Sensor

ON-OFF	249,00 €

NEKO / GINGER 600
Ceiling Light System
Incl. Phase Dim Driver

44W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
40 W	44 W	95 V	480 mA	90	3000K	110°	4000lm	3350lm	G6RC-9S3A150P-WN
					3500K	110°	4200lm	3550lm	G6RC-9S3A150P-WN
					4000K	110°	4100lm	3350lm	G6RC-9S3A150P-WN

Code Remark: P=(Phase Dim)

40 W	44 W	95 V	480 mA	90	3000K	110°	4000lm	3350lm	G6RC-9S3A150P-BN
					3500K	110°	4200lm	3550lm	G6RC-9S3A150P-BN
					4000K	110°	4100lm	3350lm	G6RC-9S3A150P-BN

Code Remark: P=(Phase Dim)

Phase Dim | 329,00 €

NEKO / PEPPER 400
Ceiling Light System
Incl. Phase Dim Driver

! NEW

30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-WN

Code Remark: P=(Phase Dim)

28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-BN

Code Remark: P=(Phase Dim)

Phase Dim | 199,00 €

NEKO / PEPPER 400
Ceiling Light System
ON-OFF Driver + Microwave Sensor

NEW

30W | CRI90 | 3000K/3500K/4000K CCT Switchable | 110° | bridgelux 50,000h@L80B10 | IP44 | 5 YEARS GUARANTEE | CE | Microwave Sensor



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-WN

Code Remark: S=On-Off LED Driver+Microwave Sensor

28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-BN

Code Remark: S=On-Off LED Driver+Microwave Sensor

ON-OFF	249,00 €

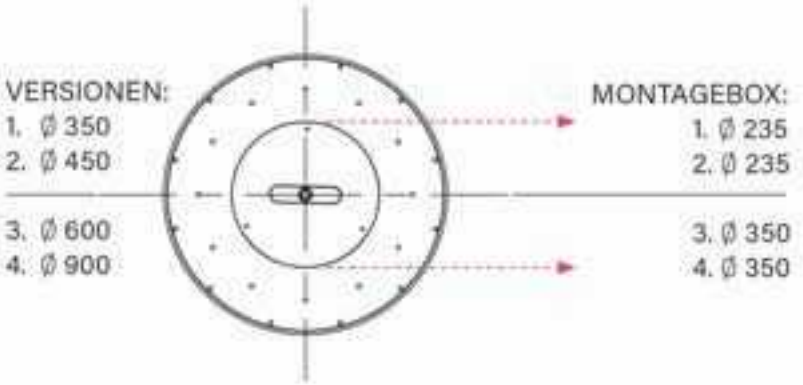

DECKENANBAU

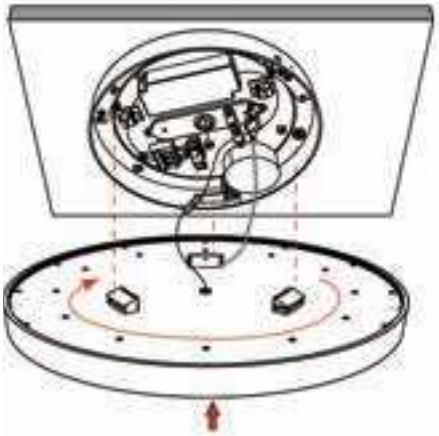

SEILPENDEL

GAME



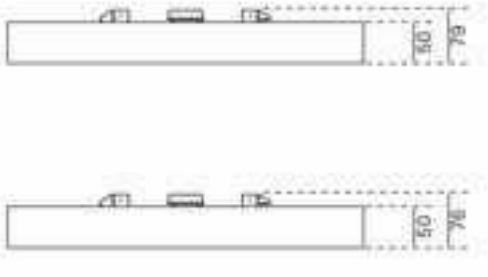

SUGAR



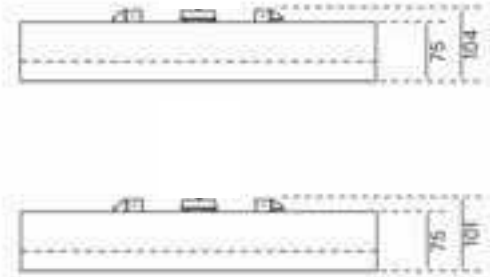

NEKO / GAME 350
Ceiling Light System

12W 16W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GASM-8279012N-BN
					3000K	90°	1900lm	1400lm	GASM-8309012N-BN
					4000K	90°	2000lm	1500lm	GASM-8409012N-BN
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GASM-8279016N-BN
					3000K	90°	2600lm	2000lm	GASM-8309016N-BN
					4000K	90°	2800lm	2200lm	GASM-8409016N-BN

White

12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GASM-8279012N-WN
					3000K	90°	1900lm	1400lm	GASM-8309012N-WN
					4000K	90°	2000lm	1500lm	GASM-8409012N-WN
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GASM-8279016N-WN
					3000K	90°	2600lm	2000lm	GASM-8309016N-WN
					4000K	90°	2800lm	2200lm	GASM-8409016N-WN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ON-OFF	349,00 €
Phase Dim	359,00 €
DALI Dim	399,00 €
Tunable White DALI Dim	569,00 €

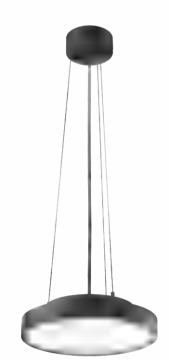

Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GAPW-8279012N-BN
					3000K	90°	1900lm	1400lm	GAPW-8309012N-BN
					4000K	90°	2000lm	1500lm	GAPW-8409012N-BN
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GAPW-8279016N-BN
					3000K	90°	2600lm	2000lm	GAPW-8309016N-BN
					4000K	90°	2800lm	2200lm	GAPW-8409016N-BN

Standard pendant length: 1200mm



White

12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GAPW-8279012N-WN
					3000K	90°	1900lm	1400lm	GAPW-8309012N-WN
					4000K	90°	2000lm	1500lm	GAPW-8409012N-WN
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GAPW-8279016N-WN
					3000K	90°	2600lm	2000lm	GAPW-8309016N-WN
					4000K	90°	2800lm	2200lm	GAPW-8409016N-WN

Standard pendant length: 1200mm

ON-OFF	419,00 €
Phase Dim	429,00 €
DALI Dim	469,00 €
Tunable White DALI Dim	629,00 €

Optional accessory

Magnetic Uplight Module 350

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	33 V	250 mA	80	2700K	110°	900lm	800lm	UM35-827A108N-NN
					3000K	110°	950lm	850lm	UM35-830A108N-NN
					4000K	110°	1050lm	950lm	UM35-840A108N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GAPR-8309012N-WN with **Uplight Module**
GAPR-8309012N-WN-U

ON-OFF	+130,00 €
Phase Dim	+140,00 €
DALI Dim	+190,00 €

NEKO / GAME 450
Ceiling Light System

16W 24W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GBSM-8279016N-BN
					3000K	90°	2600lm	2000lm	GBSM-8309016N-BN
					4000K	90°	2800lm	2200lm	GBSM-8409016N-BN
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GBSM-8279024N-BN
					3000K	90°	3700lm	2800lm	GBSM-8309024N-BN
					4000K	90°	4000lm	3000lm	GBSM-8409024N-BN

White

16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GBSM-8279016N-WN
					3000K	90°	2600lm	2000lm	GBSM-8309016N-WN
					4000K	90°	2800lm	2200lm	GBSM-8409016N-WN
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GBSM-8279024N-WN
					3000K	90°	3700lm	2800lm	GBSM-8309024N-WN
					4000K	90°	4000lm	3000lm	GBSM-8409024N-WN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ON-OFF	429,00 €
Phase Dim	439,00 €
DALI Dim	489,00 €
Tunable White DALI Dim	799,00 €


Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GBPW-8279016N-BN
					3000K	90°	2600lm	2000lm	GBPW-8309016N-BN
					4000K	90°	2800lm	2200lm	GBPW-8409016N-BN
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GBPW-8279024N-BN
					3000K	90°	3700lm	2800lm	GBPW-8309024N-BN
					4000K	90°	4000lm	3000lm	GBPW-8409024N-BN

Standard pendant length: 1200mm


White

16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GBPW-8279016N-WN
					3000K	90°	2600lm	2000lm	GBPW-8309016N-WN
					4000K	90°	2800lm	2200lm	GBPW-8409016N-WN
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GBPW-8279024N-WN
					3000K	90°	3700lm	2800lm	GBPW-8309024N-WN
					4000K	90°	4000lm	3000lm	GBPW-8409024N-WN

Standard pendant length: 1200mm

ON-OFF	489,00 €
Phase Dim	499,00 €
DALI Dim	549,00 €
Tunable White DALI Dim	859,00 €

Optional accessory

Magnetic Uplight Module 450

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GBPR-8309016N-WN with **Uplight Module**
GBPR-8309016N-WN-U

ON-OFF	+130,00 €
Phase Dim	+140,00 €
DALI Dim	+190,00 €

NEKO / GAME 600

Ceiling Light System

24W 36W 46W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB CE | Intertek



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCSM-8279024N-BN
					3000K	90°	3700lm	2800lm	GCSM-8309024N-BN
					4000K	90°	4000lm	3000lm	GCSM-8409024N-BN
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCSM-8279036N-BN
					3000K	90°	6200lm	4700lm	GCSM-8309036N-BN
					4000K	90°	6600lm	4900lm	GCSM-8409036N-BN
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCSM-8279046N-BN
					3000K	90°	8100lm	6100lm	GCSM-8309046N-BN
					4000K	90°	8600lm	6400lm	GCSM-8409046N-BN

White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCSM-8279024N-WN
					3000K	90°	3700lm	2800lm	GCSM-8309024N-WN
					4000K	90°	4000lm	3000lm	GCSM-8409024N-WN
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCSM-8279036N-WN
					3000K	90°	6200lm	4700lm	GCSM-8309036N-WN
					4000K	90°	6600lm	4900lm	GCSM-8409036N-WN
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCSM-8279046N-WN
					3000K	90°	8100lm	6100lm	GCSM-8309046N-WN
					4000K	90°	8600lm	6400lm	GCSM-8409046N-WN

GAME 600 24W/36W

ON-OFF	639,00 €
Phase Dim	649,00 €
DALI Dim	709,00 €
Tunable White DALI Dim	1449,00 €

GAME 600 46W

ON-OFF	669,00 €
DALI Dim	759,00 €

Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCPW-8279024N-BN
					3000K	90°	3700lm	2800lm	GCPW-8309024N-BN
					4000K	90°	4000lm	3000lm	GCPW-8409024N-BN
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCPW-8279036N-BN
					3000K	90°	6200lm	4700lm	GCPW-8309036N-BN
					4000K	90°	6600lm	4900lm	GCPW-8409036N-BN
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCPW-8279046N-BN
					3000K	90°	8100lm	6100lm	GCPW-8309046N-BN
					4000K	90°	8600lm	6400lm	GCPW-8409046N-BN

Standard pendant length: 1200mm

24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCPW-8279024N-WN
					3000K	90°	3700lm	2800lm	GCPW-8309024N-WN
					4000K	90°	4000lm	3000lm	GCPW-8409024N-WN
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCPW-8279036N-WN
					3000K	90°	6200lm	4700lm	GCPW-8309036N-WN
					4000K	90°	6600lm	4900lm	GCPW-8409036N-WN
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCPW-8279046N-WN
					3000K	90°	8100lm	6100lm	GCPW-8309046N-WN
					4000K	90°	8600lm	6400lm	GCPW-8409046N-WN

Standard pendant length: 1200mm

GAME 600 Seilpendel 24W/36W

ON-OFF	699,00 €
Phase Dim	709,00 €
DALI Dim	769,00 €
Tunable White DALI Dim	1509,00 €

GAME 600 Seilpendel 46W

ON-OFF	729,00 €
DALI Dim	829,00 €

Optional accessory

Magnetic Uplight Module 600

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GCPR-8309036N-WN with **Uplight Module**
GCPR-8309036N-WN-U

ON-OFF	+210,00 €
Phase Dim	+220,00 €
DALI Dim	+260,00 €

NEKO / GAME 900
Ceiling Light System

65W | CRI80 CRI90 | 2700K 3000K 4000K | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP40 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek



Black

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDSM-8279065N-BN
					3000K	90°	10500lm	8000lm	GDSM-8309065N-BN
					4000K	90°	11000lm	8400lm	GDSM-8409065N-BN

White

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDSM-8279065N-WN
					3000K	90°	10500lm	8000lm	GDSM-8309065N-WN
					4000K	90°	11000lm	8400lm	GDSM-8409065N-WN

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

ON-OFF	1329,00 €
DALI Dim	1509,00 €

Black

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPW-8279065N-BN
					3000K	90°	10500lm	8000lm	GDPW-8309065N-BN
					4000K	90°	11000lm	8400lm	GDPW-8409065N-BN

Standard pendant length: 1200mm

White

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPW-8279065N-WN
					3000K	90°	10500lm	8000lm	GDPW-8309065N-WN
					4000K	90°	11000lm	8400lm	GDPW-8409065N-WN

Standard pendant length: 1200mm

ON-OFF	1389,00 €
DALI Dim	1569,00 €

Optional accessory

Magnetic Uplight Module 900

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110°	2500lm	2200lm	UM90-827A125N-NN
					3000K	110°	2700lm	2400lm	UM90-830A125N-NN
					4000K	110°	2900lm	2600lm	UM90-840A125N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GDPR-8309065N-WN with **Uplight Module**
GDPR-8309065N-WN-U

ON-OFF	+320,00 €
DALI Dim	+390,00 €

NEKO / SUGAR 350
Ceiling Light System

12W 16W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB | CE | Intertek



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012N-BB
					3000K	90°	1900lm	1400lm	SASM-8309012N-BB
					4000K	90°	2000lm	1500lm	SASM-8409012N-BB
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279016N-BB
					3000K	90°	2600lm	2000lm	SASM-8309016N-BB
					4000K	90°	2800lm	2200lm	SASM-8409016N-BB


Black-Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012N-BG
					3000K	90°	1900lm	1400lm	SASM-8309012N-BG
					4000K	90°	2000lm	1500lm	SASM-8409012N-BG
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279016N-BG
					3000K	90°	2600lm	2000lm	SASM-8309016N-BG
					4000K	90°	2800lm	2200lm	SASM-8409016N-BG

White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012N-WW
					3000K	90°	1900lm	1400lm	SASM-8309012N-WW
					4000K	90°	2000lm	1500lm	SASM-8409012N-WW
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279016N-WW
					3000K	90°	2600lm	2000lm	SASM-8309016N-WW
					4000K	90°	2800lm	2200lm	SASM-8409016N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ON-OFF	379,00 €
Phase Dim	389,00 €
DALI Dim	429,00 €
Tunable White DALI Dim	589,00 €

Optional accessory

Magnetic Uplight Module 350

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	33 V	250 mA	80	2700K	110°	900lm	800lm	UM35-827A108N-NN
					3000K	110°	950lm	850lm	UM35-830A108N-NN
					4000K	110°	1050lm	950lm	UM35-840A108N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SAPW-8309012N-WW with **Uplight Module**
SAPW-8309012N-WW-U

ON-OFF	+130,00 €
Phase Dim	+140,00 €
DALI Dim	+190,00 €

NEKO / SUGAR 350
Ceiling Light System



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-BB
					3000K	90°	1900lm	1400lm	SAPW-8309012N-BB
					4000K	90°	2000lm	1500lm	SAPW-8409012N-BB
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279016N-BB
					3000K	90°	2600lm	2000lm	SAPW-8309016N-BB
					4000K	90°	2800lm	2200lm	SAPW-8409016N-BB

Standard pendant length: 1200mm



Black-Gold

12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-BG
					3000K	90°	1900lm	1400lm	SAPW-8309012N-BG
					4000K	90°	2000lm	1500lm	SAPW-8409012N-BG
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279016N-BG
					3000K	90°	2600lm	2000lm	SAPW-8309016N-BG
					4000K	90°	2800lm	2200lm	SAPW-8409016N-BG

Standard pendant length: 1200mm



White

12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-WW
					3000K	90°	1900lm	1400lm	SAPW-8309012N-WW
					4000K	90°	2000lm	1500lm	SAPW-8409012N-WW
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279016N-WW
					3000K	90°	2600lm	2000lm	SAPW-8309016N-WW
					4000K	90°	2800lm	2200lm	SAPW-8409016N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ON-OFF	439,00 €
Phase Dim	449,00 €
DALI Dim	489,00 €
Tunable White DALI Dim	659,00 €

Optional accessory

Magnetic Uplight Module 350

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	33 V	250 mA	80	2700K	110°	900lm	800lm	UM35-827A108N-NN
					3000K	110°	950lm	850lm	UM35-830A108N-NN
					4000K	110°	1050lm	950lm	UM35-840A108N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SAPW-8309012N-WW with **Uplight Module**
SAPW-8309012N-WW-U

ON-OFF	+130,00 €
Phase Dim	+140,00 €
DALI Dim	+190,00 €

NEKO / SUGAR 450

Ceiling Light System

16W 24W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB | CE | ETL Intertek

Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279016N-BB
					3000K	90°	2600lm	2000lm	SBSM-8309016N-BB
					4000K	90°	2800lm	2200lm	SBSM-8409016N-BB
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279024N-BB
					3000K	90°	3700lm	2800lm	SBSM-8309024N-BB
					4000K	90°	4000lm	3000lm	SBSM-8409024N-BB

Black-Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279016N-BG
					3000K	90°	2600lm	2000lm	SBSM-8309016N-BG
					4000K	90°	2800lm	2200lm	SBSM-8409016N-BG
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279024N-BG
					3000K	90°	3700lm	2800lm	SBSM-8309024N-BG
					4000K	90°	4000lm	3000lm	SBSM-8409024N-BG

White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279016N-WW
					3000K	90°	2600lm	2000lm	SBSM-8309016N-WW
					4000K	90°	2800lm	2200lm	SBSM-8409016N-WW
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279024N-WW
					3000K	90°	3700lm	2800lm	SBSM-8309024N-WW
					4000K	90°	4000lm	3000lm	SBSM-8409024N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ON-OFF	459,00 €
Phase Dim	469,00 €
DALI Dim	519,00 €
Tunable White DALI Dim	829,00 €

Optional accessory

Magnetic Uplight Module 450

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SBPW-8309016N-WN with **Uplight Module**
SBPW-8309016N-WN-U

ON-OFF	+130,00 €
Phase Dim	+140,00 €
DALI Dim	+190,00 €

NEKO / SUGAR 450
Ceiling Light System



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-BB
					3000K	90°	2600lm	2000lm	SBPW-8309016N-BB
					4000K	90°	2800lm	2200lm	SBPW-8409016N-BB
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-BB
					3000K	90°	3700lm	2800lm	SBPW-8309024N-BB
					4000K	90°	4000lm	3000lm	SBPW-8409024N-BB

Standard pendant length: 1200mm



Black-Gold

16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-BG
					3000K	90°	2600lm	2000lm	SBPW-8309016N-BG
					4000K	90°	2800lm	2200lm	SBPW-8409016N-BG
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-BG
					3000K	90°	3700lm	2800lm	SBPW-8309024N-BG
					4000K	90°	4000lm	3000lm	SBPW-8409024N-BG

Standard pendant length: 1200mm



White

16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-WW
					3000K	90°	2600lm	2000lm	SBPW-8309016N-WW
					4000K	90°	2800lm	2200lm	SBPW-8409016N-WW
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-WW
					3000K	90°	3700lm	2800lm	SBPW-8309024N-WW
					4000K	90°	4000lm	3000lm	SBPW-8409024N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

ON-OFF	519,00 €
Phase Dim	529,00 €
DALI Dim	579,00 €
Tunable White DALI Dim	889,00 €

Optional accessory

Magnetic Uplight Module 450

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SBPW-8309016N-WN with **Uplight Module**
SBPW-8309016N-WN-U

ON-OFF	+130,00 €
Phase Dim	+140,00 €
DALI Dim	+190,00 €

NEKO / SUGAR 600

Ceiling Light System

24W 36W 46W | CRI80 CRI90 | 2700K 3000K 4000K | Tunable White Available | 90° | OSRAM 50,000h@L80B10 | UGR < 19 | IP 40 | 5 YEARS GUARANTEE | CB | CE | Intertek



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279024N-BB
					3000K	90°	3700lm	2800lm	SCSM-8309024N-BB
					4000K	90°	4000lm	3000lm	SCSM-8409024N-BB
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279036N-BB
					3000K	90°	6200lm	4700lm	SCSM-8309036N-BB
					4000K	90°	6600lm	4900lm	SCSM-8409036N-BB
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279046N-BB
					3000K	90°	8100lm	6100lm	SCSM-8309046N-BB
					4000K	90°	8600lm	6400lm	SCSM-8409046N-BB

Black-Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279024N-BG
					3000K	90°	3700lm	2800lm	SCSM-8309024N-BG
					4000K	90°	4000lm	3000lm	SCSM-8409024N-BG
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279036N-BG
					3000K	90°	6200lm	4700lm	SCSM-8309036N-BG
					4000K	90°	6600lm	4900lm	SCSM-8409036N-BG
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279046N-BG
					3000K	90°	8100lm	6100lm	SCSM-8309046N-BG
					4000K	90°	8600lm	6400lm	SCSM-8409046N-BG

White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279024N-WW
					3000K	90°	3700lm	2800lm	SCSM-8309024N-WW
					4000K	90°	4000lm	3000lm	SCSM-8409024N-WW
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279036N-WW
					3000K	90°	6200lm	4700lm	SCSM-8309036N-WW
					4000K	90°	6600lm	4900lm	SCSM-8409036N-WW
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279046N-WW
					3000K	90°	8100lm	6100lm	SCSM-8309046N-WW
					4000K	90°	8600lm	6400lm	SCSM-8409046N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

SUGAR 600 24W / 36W

ON-OFF	679,00 €
Phase Dim	699,00 €
DALI Dim	749,00 €
Tunable White DALI Dim	1489,00 €

SUGAR 600 46W

ON-OFF	709,00 €
DALI Dim	809,00 €

Optional accessory

Magnetic Uplight Module 600

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SCPW-8279036N-WW with **Uplight Module**
SCPW-8279036N-WW-U

ON-OFF	+210,00 €
Phase Dim	+220,00 €
DALI Dim	+260,00 €

NEKO / SUGAR 600
Ceiling Light System

Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279024N-BB
					3000K	90°	3700lm	2800lm	SCPW-8309024N-BB
					4000K	90°	4000lm	3000lm	SCPW-8409024N-BB
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279036N-BB
					3000K	90°	6200lm	4700lm	SCPW-8309036N-BB
					4000K	90°	6600lm	4900lm	SCPW-8409036N-BB
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279046N-BB
					3000K	90°	8100lm	6100lm	SCPW-8309046N-BB
					4000K	90°	8600lm	6400lm	SCPW-8409046N-BB

Standard pendant length: 1200mm

Black-Gold

24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279024N-BG
					3000K	90°	3700lm	2800lm	SCPW-8309024N-BG
					4000K	90°	4000lm	3000lm	SCPW-8409024N-BG
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279036N-BG
					3000K	90°	6200lm	4700lm	SCPW-8309036N-BG
					4000K	90°	6600lm	4900lm	SCPW-8409036N-BG
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279046N-BG
					3000K	90°	8100lm	6100lm	SCPW-8309046N-BG
					4000K	90°	8600lm	6400lm	SCPW-8409046N-BG

Standard pendant length: 1200mm



White

24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279024N-WW
					3000K	90°	3700lm	2800lm	SCPW-8309024N-WW
					4000K	90°	4000lm	3000lm	SCPW-8409024N-WW
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279036N-WW
					3000K	90°	6200lm	4700lm	SCPW-8309036N-WW
					4000K	90°	6600lm	4900lm	SCPW-8409036N-WW
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279046N-WW
					3000K	90°	8100lm	6100lm	SCPW-8309046N-WW
					4000K	90°	8600lm	6400lm	SCPW-8409046N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

SUGAR 600 Seilpendel 24W / 36W

ON-OFF	749,00 €
Phase Dim	759,00 €
DALI Dim	809,00 €
Tunable White DALI Dim	1549,00 €

SUGAR 600 Seilpendel 46W

ON-OFF	779,00 €
DALI Dim	869,00 €

Optional accessory



Magnetic Uplight Module 600

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SCPW-8279036N-WW with **Uplight Module**
SCPW-8279036N-WW-U

ON-OFF	+210,00 €
Phase Dim	+220,00 €
DALI Dim	+260,00 €

NEKO / SUGAR 900
Ceiling Light System

Black

LED	Power System	Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA		80	2700K	90°	9900lm	7600lm	SDSM-8279065N-BB
						3000K	90°	10500lm	8000lm	SDSM-8309065N-BB
						4000K	90°	11000lm	8400lm	SDSM-8409065N-BB

Black-Gold

65 W	68 W	46 V	1400 mA		80	2700K	90°	9900lm	7600lm	SDSM-8279065N-BG
						3000K	90°	10500lm	8000lm	SDSM-8309065N-BG
						4000K	90°	11000lm	8400lm	SDSM-8409065N-BG

White

65 W	68 W	46 V	1400 mA		80	2700K	90°	9900lm	7600lm	SDSM-8279065N-WW
						3000K	90°	10500lm	8000lm	SDSM-8309065N-WW
						4000K	90°	11000lm	8400lm	SDSM-8409065N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

ON-OFF	1409,00 €
DALI Dim	1589,00 €

Optional accessory

Magnetic Uplight Module 900

LED	Power System	Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA		80	2700K	110°	2500lm	2200lm	UM90-827A125N-NN
						3000K	110°	2700lm	2400lm	UM90-830A125N-NN
						4000K	110°	2900lm	2600lm	UM90-840A125N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Code for SDPW-8309065N-WW with **Uplight Module**
SDPW-8309065N-WW-U

ON-OFF	+320,00 €
DALI Dim	+390,00 €

NEKO / SUGAR 900
Ceiling Light System

Black

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065N-BB
					3000K	90°	10500lm	8000lm	SDPW-8309065N-BB
					4000K	90°	11000lm	8400lm	SDPW-8409065N-BB

Standard pendant length: 1200mm

Black-Gold

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065N-BG
					3000K	90°	10500lm	8000lm	SDPW-8309065N-BG
					4000K	90°	11000lm	8400lm	SDPW-8409065N-BG

Standard pendant length: 1200mm

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065N-WW
					3000K	90°	10500lm	8000lm	SDPW-8309065N-WW
					4000K	90°	11000lm	8400lm	SDPW-8409065N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

ON-OFF	1469,00 €
DALI Dim	1649,00 €

Optional accessory



Magnetic Uplight Module 900

LED	Power System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110°	2500lm	2200lm	UM90-827A125N-NN
					3000K	110°	2700lm	2400lm	UM90-830A125N-NN
					4000K	110°	2900lm	2600lm	UM90-840A125N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Code for SDPW-8309065N-WW with **Uplight Module**
SDPW-8309065N-WW-U

ON-OFF	+320,00 €
DALI Dim	+390,00 €

NEKO / SKYDRIVER
LED Ceiling Light
Incl. Phase Dim Driver

10W | CRI90 | 2700K 3000K | 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-WW
					3000K	36°	1000lm	780lm	SDRC-9303610P-WW

Code Remark: P=(Phase Dim)

8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-BB
					3000K	36°	1000lm	780lm	SDRC-9303610P-BB

Code Remark: P=(Phase Dim)

Phase Dim | 109,00 €

NEKO / SKYDRIVER
LED Ceiling Light
Incl. Phase Dim Driver

10W | CRI90 | 2700K 3000K | 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-WW
					3000K	36°	1000lm	780lm	SDSC-9303610P-WW

Code Remark: P=(Phase Dim)

8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-BB
					3000K	36°	1000lm	780lm	SDSC-9303610P-BB

Code Remark: P=(Phase Dim)

Phase Dim | 109,00 €

NEKO / SKYJOY Single
LED Ceiling Light
Incl. Phase Dim Driver

8W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	8 W	35 V	200 mA	90	2700K	36°	750lm	580lm	SJSC-9273608P-WW

Code Remark: P=(Phase Dim)

7 W	8 W	35 V	200 mA	90	2700K	36°	750lm	580lm	SJSC-9273608P-BB

Code Remark: P=(Phase Dim)

Phase Dim | 119,00 €

10W | CRI90 | 1800K-3000K Dim to Warm | 36° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	10 W	35 V	250 mA	90	1800K -3000K	36°	850lm	Max.650lm	SJSC-9D33610P-WW

Code Remark: P=(Phase Dim)

9 W	10 W	35 V	250 mA	90	1800K -3000K	36°	850lm	Max.650lm	SJSC-9D33610P-BB

Code Remark: P=(Phase Dim)

Phase Dim | 129,00 €

NEKO / SKYJOY Double
LED Ceiling Light
Incl. Phase Dim Driver

16W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
14 W	16 W	35 V	400 mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-WW

Code Remark: P=(Phase Dim)

14 W	16 W	35 V	400 mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-BB

Code Remark: P=(Phase Dim)

Phase Dim	179,00 €

20W | CRI90 | 1800K-3000K Dim to Warm | 36° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	35 V	500 mA	90	1800K -3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-WW

Code Remark: P=(Phase Dim)

18 W	20 W	35 V	500 mA	90	1800K -3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-BB

Code Remark: P=(Phase Dim)

Phase Dim	189,00 €

NEKO / SKYLINE
LED Ceiling Light
Incl. Phase Dim Driver

8.5W | CRI90 | 2700K 3000K | 30° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	14.5 V	600 mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-WS
					3000K	30°	1000lm	750lm	SL5C-9303010P-WS

Code Remark: P=(Phase Dim)



8.5 W	10 W	14.5 V	600 mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-BS
					3000K	30°	1000lm	750lm	SL5C-9303010P-BS

Code Remark: P=(Phase Dim)

Phase Dim	139,00 €

NEKO / MIU-C M

LED Ceiling Light

21W 15W | CRI90 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-BB
						25°	1400lm	1100lm	MCM1-9272515F-BB
						30°	1400lm	1100lm	MCM1-9273015F-BB
					3000K	15°	1500lm	1200lm	MCM1-9301515F-BB
						25°	1500lm	1200lm	MCM1-9302515F-BB
						30°	1500lm	1200lm	MCM1-9303015F-BB
					4000K	15°	1600lm	1300lm	MCM1-9401515F-BB
						25°	1600lm	1300lm	MCM1-9402515F-BB
						30°	1600lm	1300lm	MCM1-9403015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-BB
						25°	1900lm	1500lm	MCM2-9272521F-BB
						30°	1900lm	1500lm	MCM2-9273021F-BB
					3000K	15°	2000lm	1600lm	MCM2-9301521F-BB
						25°	2000lm	1600lm	MCM2-9302521F-BB
						30°	2000lm	1600lm	MCM2-9303021F-BB
					4000K	15°	2100lm	1700lm	MCM2-9401521F-BB
						25°	2100lm	1700lm	MCM2-9402521F-BB
						30°	2100lm	1700lm	MCM2-9403021F-BB

ON-OFF	149,00 €
Phase Dim	169,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-BG
						25°	1400lm	1100lm	MCM1-9272515F-BG
						30°	1400lm	1100lm	MCM1-9273015F-BG
					3000K	15°	1500lm	1200lm	MCM1-9301515F-BG
						25°	1500lm	1200lm	MCM1-9302515F-BG
						30°	1500lm	1200lm	MCM1-9303015F-BG
					4000K	15°	1600lm	1300lm	MCM1-9401515F-BG
						25°	1600lm	1300lm	MCM1-9402515F-BG
						30°	1600lm	1300lm	MCM1-9403015F-BG
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-BG
						25°	1900lm	1500lm	MCM2-9272521F-BG
						30°	1900lm	1500lm	MCM2-9273021F-BG
					3000K	15°	2000lm	1600lm	MCM2-9301521F-BG
						25°	2000lm	1600lm	MCM2-9302521F-BG
						30°	2000lm	1600lm	MCM2-9303021F-BG
					4000K	15°	2100lm	1700lm	MCM2-9401521F-BG
						25°	2100lm	1700lm	MCM2-9402521F-BG
						30°	2100lm	1700lm	MCM2-9403021F-BG

ON-OFF	149,00 €
Phase Dim	169,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WB
						25°	1400lm	1100lm	MCM1-9272515F-WB
						30°	1400lm	1100lm	MCM1-9273015F-WB
					3000K	15°	1500lm	1200lm	MCM1-9301515F-WB
						25°	1500lm	1200lm	MCM1-9302515F-WB
						30°	1500lm	1200lm	MCM1-9303015F-WB
					4000K	15°	1600lm	1300lm	MCM1-9401515F-WB
						25°	1600lm	1300lm	MCM1-9402515F-WB
						30°	1600lm	1300lm	MCM1-9403015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-WB
						25°	1900lm	1500lm	MCM2-9272521F-WB
						30°	1900lm	1500lm	MCM2-9273021F-WB
					3000K	15°	2000lm	1600lm	MCM2-9301521F-WB
						25°	2000lm	1600lm	MCM2-9302521F-WB
						30°	2000lm	1600lm	MCM2-9303021F-WB
					4000K	15°	2100lm	1700lm	MCM2-9401521F-WB
						25°	2100lm	1700lm	MCM2-9402521F-WB
						30°	2100lm	1700lm	MCM2-9403021F-WB

ON-OFF	149,00 €
Phase Dim	169,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WW
						25°	1400lm	1100lm	MCM1-9272515F-WW
						30°	1400lm	1100lm	MCM1-9273015F-WW
					3000K	15°	1500lm	1200lm	MCM1-9301515F-WW
						25°	1500lm	1200lm	MCM1-9302515F-WW
						30°	1500lm	1200lm	MCM1-9303015F-WW
					4000K	15°	1600lm	1300lm	MCM1-9401515F-WW
						25°	1600lm	1300lm	MCM1-9402515F-WW
						30°	1600lm	1300lm	MCM1-9403015F-WW
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-WW
						25°	1900lm	1500lm	MCM2-9272521F-WW
						30°	1900lm	1500lm	MCM2-9273021F-WW
					3000K	15°	2000lm	1600lm	MCM2-9301521F-WW
						25°	2000lm	1600lm	MCM2-9302521F-WW
						30°	2000lm	1600lm	MCM2-9303021F-WW
					4000K	15°	2100lm	1700lm	MCM2-9401521F-WW
						25°	2100lm	1700lm	MCM2-9402521F-WW
						30°	2100lm	1700lm	MCM2-9403021FWW

ON-OFF	149,00 €
Phase Dim	169,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €

NEKO / MIU-C M
LED Ceiling Light

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WG
						25°	1400lm	1100lm	MCM1-9272515F-WG
						30°	1400lm	1100lm	MCM1-9273015F-WG
					3000K	15°	1500lm	1200lm	MCM1-9301515F-WG
						25°	1500lm	1200lm	MCM1-9302515F-WG
						30°	1500lm	1200lm	MCM1-9303015F-WG
					4000K	15°	1600lm	1300lm	MCM1-9401515F-WG
						25°	1600lm	1300lm	MCM1-9402515F-WG
						30°	1600lm	1300lm	MCM1-9403015F-WG
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-WG
						25°	1900lm	1500lm	MCM2-9272521F-WG
						30°	1900lm	1500lm	MCM2-9273021F-WG
					3000K	15°	2000lm	1600lm	MCM2-9301521F-WG
						25°	2000lm	1600lm	MCM2-9302521F-WG
						30°	2000lm	1600lm	MCM2-9303021F-WG
					4000K	15°	2100lm	1700lm	MCM2-9401521F-WG
						25°	2100lm	1700lm	MCM2-9402521F-WG
						30°	2100lm	1700lm	MCM2-9403021F-WG

ON-OFF	149,00 €
Phase Dim	169,00 €

ON-OFF	159,00 €
Phase Dim	179,00 €

Code Remark: F=(ON-OFF) P=(Phase Dim)

NEKO / MIU-C L
LED Ceiling Light

28W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-BB
						30°	3200lm	2500lm	MCL1-9273028F-BB
						45°	3200lm	2500lm	MCL1-9274528F-BB
					3000K	18°	3400lm	2700lm	MCL1-9301828F-BB
						30°	3400lm	2700lm	MCL1-9303028F-BB
						45°	3400lm	2700lm	MCL1-9304528F-BB
					4000K	18°	3600lm	2900lm	MCL1-9401828F-BB
						30°	3600lm	2900lm	MCL1-9403028F-BB
						45°	3600lm	2900lm	MCL1-9404528F-BB

ON-OFF	179,00 €
DALI Dim	259,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-BG
						30°	3200lm	2500lm	MCL1-9273028F-BG
						45°	3200lm	2500lm	MCL1-9274528F-BG
					3000K	18°	3400lm	2700lm	MCL1-9301828F-BG
						30°	3400lm	2700lm	MCL1-9303028F-BG
						45°	3400lm	2700lm	MCL1-9304528F-BG
					4000K	18°	3600lm	2900lm	MCL1-9401828F-BG
						30°	3600lm	2900lm	MCL1-9403028F-BG
						45°	3600lm	2900lm	MCL1-9404528F-BG

ON-OFF	179,00 €
DALI Dim	259,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WB
						30°	3200lm	2500lm	MCL1-9273028F-WB
						45°	3200lm	2500lm	MCL1-9274528F-WB
					3000K	18°	3400lm	2700lm	MCL1-9301828F-WB
						30°	3400lm	2700lm	MCL1-9303028F-WB
						45°	3400lm	2700lm	MCL1-9304528F-WB
					4000K	18°	3600lm	2900lm	MCL1-9401828F-WB
						30°	3600lm	2900lm	MCL1-9403028F-WB
						45°	3600lm	2900lm	MCL1-9404528F-WB

ON-OFF	179,00 €
DALI Dim	259,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WW
						30°	3200lm	2500lm	MCL1-9273028F-WW
						45°	3200lm	2500lm	MCL1-9274528F-WW
					3000K	18°	3400lm	2700lm	MCL1-9301828F-WW
						30°	3400lm	2700lm	MCL1-9303028F-WW
						45°	3400lm	2700lm	MCL1-9304528F-WW
					4000K	18°	3600lm	2900lm	MCL1-9401828F-WW
						30°	3600lm	2900lm	MCL1-9403028F-WW
						45°	3600lm	2900lm	MCL1-9404528F-WW

ON-OFF	179,00 €
DALI Dim	259,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WG
						30°	3200lm	2500lm	MCL1-9273028F-WG
						45°	3200lm	2500lm	MCL1-9274528F-WG
					3000K	18°	3400lm	2700lm	MCL1-9301828F-WG
						30°	3400lm	2700lm	MCL1-9303028F-WG
						45°	3400lm	2700lm	MCL1-9304528F-WG
					4000K	18°	3600lm	2900lm	MCL1-9401828F-WG
						30°	3600lm	2900lm	MCL1-9403028F-WG
						45°	3600lm	2900lm	MCL1-9404528F-WG

ON-OFF	179,00 €
DALI Dim	259,00 €

Code Remark: F=(ON-OFF) D=D(DALI Dim)

NEKO / MIU-P S
LED Pendant Light

11W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-BB
						24°	850lm	700lm	MPS1-9272411F-BB
						36°	850lm	700lm	MPS1-9273611F-BB
					3000K	18°	950lm	720lm	MPS1-9301811F-BB
						24°	950lm	720lm	MPS1-9302411F-BB
						36°	950lm	720lm	MPS1-9303611F-BB
					4000K	18°	1050lm	800lm	MPS1-9401811F-BB
						24°	1050lm	800lm	MPS1-9402411F-BB
						36°	1050lm	800lm	MPS1-9403611F-BB

ON-OFF	129,00 €
Phase Dim	139,00 €

9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-BG
						24°	850lm	700lm	MPS1-9272411F-BG
						36°	850lm	700lm	MPS1-9273611F-BG
					3000K	18°	950lm	720lm	MPS1-9301811F-BG
						24°	950lm	720lm	MPS1-9302411F-BG
						36°	950lm	720lm	MPS1-9303611F-BG
					4000K	18°	1050lm	800lm	MPS1-9401811F-BG
						24°	1050lm	800lm	MPS1-9402411F-BG
						36°	1050lm	800lm	MPS1-9403611F-BG

ON-OFF	129,00 €
Phase Dim	139,00 €

9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WB
						24°	850lm	700lm	MPS1-9272411F-WB
						36°	850lm	700lm	MPS1-9273611F-WB
					3000K	18°	950lm	720lm	MPS1-9301811F-WB
						24°	950lm	720lm	MPS1-9302411F-WB
						36°	950lm	720lm	MPS1-9303611F-WB
					4000K	18°	1050lm	800lm	MPS1-9401811F-WB
						24°	1050lm	800lm	MPS1-9402411F-WB
						36°	1050lm	800lm	MPS1-9403611F-WB

ON-OFF	129,00 €
Phase Dim	139,00 €

9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WW
						24°	850lm	700lm	MPS1-9272411F-WW
						36°	850lm	700lm	MPS1-9273611F-WW
					3000K	18°	950lm	720lm	MPS1-9301811F-WW
						24°	950lm	720lm	MPS1-9302411F-WW
						36°	950lm	720lm	MPS1-9303611F-WW
					4000K	18°	1050lm	800lm	MPS1-9401811F-WW
						24°	1050lm	800lm	MPS1-9402411FWW
						36°	1050lm	800lm	MPS1-9403611F-WW

ON-OFF	129,00 €
Phase Dim	139,00 €

9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WG
						24°	850lm	700lm	MPS1-9272411F-WG
						36°	850lm	700lm	MPS1-9273611F-WG
					3000K	18°	950lm	720lm	MPS1-9301811F-WG
						24°	950lm	720lm	MPS1-9302411F-WG
						36°	950lm	720lm	MPS1-9303611F-WG
					4000K	18°	1050lm	800lm	MPS1-9401811F-WG
						24°	1050lm	800lm	MPS1-9402411F-WG
						36°	1050lm	800lm	MPS1-9403611F-WG

ON-OFF	129,00 €
Phase Dim	139,00 €

Code Remark: F=(ON-OFF) P= (Phase Dim)

NEKO / MIU-P M
LED Pendant Light

21W 15W | CRI90 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-BB
						25°	1400lm	1100lm	MPM1-9272515F-BB
						30°	1400lm	1100lm	MPM1-9273015F-BB
					3000K	15°	1500lm	1200lm	MPM1-9301515F-BB
						25°	1500lm	1200lm	MPM1-9302515F-BB
						30°	1500lm	1200lm	MPM1-9303015F-BB
					4000K	15°	1600lm	1300lm	MPM1-9401515F-BB
						25°	1600lm	1300lm	MPM1-9402515F-BB
						30°	1600lm	1300lm	MPM1-9403015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-BB
						25°	1900lm	1500lm	MPM2-9272521FBB
						30°	1900lm	1500lm	MPM2-9273021F-BB
					3000K	15°	2000lm	1600lm	MPM2-9301521F-BB
						25°	2000lm	1600lm	MPM2-9302521F-BB
						30°	2000lm	1600lm	MPM2-9303021F-BB
					4000K	15°	2100lm	1700lm	MPM2-9401521F-BB
						25°	2100lm	1700lm	MPM2-9402521F-BB
						30°	2100lm	1700lm	MPM2-9403021F-BB

ON-OFF	199,00 €
Phase Dim	219,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-BG
						25°	1400lm	1100lm	MPM1-9272515F-BG
						30°	1400lm	1100lm	MPM1-9273015F-BG
					3000K	15°	1500lm	1200lm	MPM1-9301515F-BG
						25°	1500lm	1200lm	MPM1-9302515F-BG
						30°	1500lm	1200lm	MPM1-9303015F-BG
					4000K	15°	1600lm	1300lm	MPM1-9401515F-BG
						25°	1600lm	1300lm	MPM1-9402515F-BG
						30°	1600lm	1300lm	MPM1-9403015F-BG
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-BG
						25°	1900lm	1500lm	MPM2-9272521F-BG
						30°	1900lm	1500lm	MPM2-9273021F-BG
					3000K	15°	2000lm	1600lm	MPM2-9301521F-BG
						25°	2000lm	1600lm	MPM2-9302521F-BG
						30°	2000lm	1600lm	MPM2-9303021F-BG
					4000K	15°	2100lm	1700lm	MPM2-9401521F-BG
						25°	2100lm	1700lm	MPM2-9402521F-BG
						30°	2100lm	1700lm	MPM2-9403021F-BG

ON-OFF	199,00 €
Phase Dim	219,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WB
						25°	1400lm	1100lm	MPM1-9272515F-WB
						30°	1400lm	1100lm	MPM1-9273015F-WB
					3000K	15°	1500lm	1200lm	MPM1-9301515F-WB
						25°	1500lm	1200lm	MPM1-9302515F-WB
						30°	1500lm	1200lm	MPM1-9303015F-WB
					4000K	15°	1600lm	1300lm	MPM1-9401515F-WB
						25°	1600lm	1300lm	MPM1-9402515F-WB
						30°	1600lm	1300lm	MPM1-9403015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-WB
						25°	1900lm	1500lm	MPM2-9272521F-WB
						30°	1900lm	1500lm	MPM2-9273021F-WB
					3000K	15°	2000lm	1600lm	MPM2-9301521F-WB
						25°	2000lm	1600lm	MPM2-9302521F-WB
						30°	2000lm	1600lm	MPM2-9303021F-WB
					4000K	15°	2100lm	1700lm	MPM2-9401521F-WB
						25°	2100lm	1700lm	MPM2-9402521F-WB
						30°	2100lm	1700lm	MPM2-9403021F-WB

ON-OFF	199,00 €
Phase Dim	219,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WW
						25°	1400lm	1100lm	MPM1-9272515F-WW
						30°	1400lm	1100lm	MPM1-9273015F-WW
					3000K	15°	1500lm	1200lm	MPM1-9301515F-WW
						25°	1500lm	1200lm	MPM1-9302515F-WW
						30°	1500lm	1200lm	MPM1-9303015F-WW
					4000K	15°	1600lm	1300lm	MPM1-9401515F-WW
						25°	1600lm	1300lm	MPM1-9402515F-WW
						30°	1600lm	1300lm	MPM1-9403015F-WW
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-WW
						25°	1900lm	1500lm	MPM2-9272521F-WW
						30°	1900lm	1500lm	MPM2-9273021F-WW
					3000K	15°	2000lm	1600lm	MPM2-9301521F-WW
						25°	2000lm	1600lm	MPM2-9302521F-WW
						30°	2000lm	1600lm	MPM2-9303021F-WW
					4000K	15°	2100lm	1700lm	MPM2-9401521F-WW
						25°	2100lm	1700lm	MPM2-9402521F-WW
						30°	2100lm	1700lm	MPM2-9403021F-WW

ON-OFF	199,00 €
Phase Dim	219,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €

NEKO / MIU-P M
LED Pendant Light

13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WG
						25°	1400lm	1100lm	MPM1-9272515F-WG
						30°	1400lm	1100lm	MPM1-9273015F-WG
					3000K	15°	1500lm	1200lm	MPM1-9301515F-WG
						25°	1500lm	1200lm	MPM1-9302515F-WG
						30°	1500lm	1200lm	MPM1-9303015F-WG
					4000K	15°	1600lm	1300lm	MPM1-9401515F-WG
						25°	1600lm	1300lm	MPM1-9402515F-WG
						30°	1600lm	1300lm	MPM1-9403015F-WG
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-WG
						25°	1900lm	1500lm	MPM2-9272521F-WG
						30°	1900lm	1500lm	MPM2-9273021F-WG
					3000K	15°	2000lm	1600lm	MPM2-9301521F-WG
						25°	2000lm	1600lm	MPM2-9302521F-WG
						30°	2000lm	1600lm	MPM2-9303021F-WG
					4000K	15°	2100lm	1700lm	MPM2-9401521F-WG
						25°	2100lm	1700lm	MPM2-9402521F-WG
						30°	2100lm	1700lm	MPM2-9403021F-WG

ON-OFF	199,00 €
Phase Dim	219,00 €

ON-OFF	209,00 €
Phase Dim	229,00 €

Code Remark: F=(ON-OFF) P=(Phase Dim)

NEKO / MIU-P L
LED Pendant Light

28W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-BB
						30°	3200lm	2500lm	MPL1-9273028F-BB
						45°	3200lm	2500lm	MPL1-9274528F-BB
					3000K	18°	3400lm	2700lm	MPL1-9301828F-BB
						30°	3400lm	2700lm	MPL1-9303028F-BB
						45°	3400lm	2700lm	MPL1-9304528F-BB
					4000K	18°	3600lm	2900lm	MPL1-9401828F-BB
						30°	3600lm	2900lm	MPL1-9403028F-BB
						45°	3600lm	2900lm	MPL1-9404528F-BB

ON-OFF	209,00 €
DALI Dim	299,00 €

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-BG
						30°	3200lm	2500lm	MPL1-9273028F-BG
						45°	3200lm	2500lm	MPL1-9274528F-BG
					3000K	18°	3400lm	2700lm	MPL1-9301828F-BG
						30°	3400lm	2700lm	MPL1-9303028F-BG
						45°	3400lm	2700lm	MPL1-9304528F-BG
					4000K	18°	3600lm	2900lm	MPL1-9401828F-BG
						30°	3600lm	2900lm	MPL1-9403028F-BG
						45°	3600lm	2900lm	MPL1-9404528F-BG

ON-OFF	209,00 €
DALI Dim	299,00 €

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WB
						30°	3200lm	2500lm	MPL1-9273028F-WB
						45°	3200lm	2500lm	MPL1-9274528F-WB
					3000K	18°	3400lm	2700lm	MPL1-9301828F-WB
						30°	3400lm	2700lm	MPL1-9303028F-WB
						45°	3400lm	2700lm	MPL1-9304528F-WB
					4000K	18°	3600lm	2900lm	MPL1-9401828F-WB
						30°	3600lm	2900lm	MPL1-9403028F-WB
						45°	3600lm	2900lm	MPL1-9404528F-WB

ON-OFF	209,00 €
DALI Dim	299,00 €

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WW
						30°	3200lm	2500lm	MPL1-9273028F-WW
						45°	3200lm	2500lm	MPL1-9274528F-WW
					3000K	18°	3400lm	2700lm	MPL1-9301828F-WW
						30°	3400lm	2700lm	MPL1-9303028F-WW
						45°	3400lm	2700lm	MPL1-9304528F-WW
					4000K	18°	3600lm	2900lm	MPL1-9401828FWW
						30°	3600lm	2900lm	MPL1-9403028F-WW
						45°	3600lm	2900lm	MPL1-9404528F-WW

ON-OFF	209,00 €
DALI Dim	299,00 €

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WG
						30°	3200lm	2500lm	MPL1-9273028F-WG
						45°	3200lm	2500lm	MPL1-9274528F-WG
					3000K	18°	3400lm	2700lm	MPL1-9301828F-WG
						30°	3400lm	2700lm	MPL1-9303028F-WG
						45°	3400lm	2700lm	MPL1-9304528F-WG
					4000K	18°	3600lm	2900lm	MPL1-9401828F-WG
						30°	3600lm	2900lm	MPL1-9403028F-WG
						45°	3600lm	2900lm	MPL1-9404528F-WG

ON-OFF	209,00 €
DALI Dim	299,00 €

Code Remark: F=(ON-OFF) D=D(DALI Dim)

NEKO / Small KOI
LED Wall Light

5W | CRI90 | 3000K | ZIGEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
5 W	7 W	9 V	500 mA	90	3000K	Up&Down	600lm	450lm	SKOI-930UD05F-WW

Code Remark: F=(ON-OFF)

5 W	7 W	9 V	500 mA	90	3000K	Up&Down	600lm	280lm	SKOI-930UD05F-BB



Code Remark: F=(ON-OFF)

ON-OFF | 149,00 €

9 W	11 W	36 V	250 mA	90	2000K-3000K	Up&Down	950lm	650lm	SKOI-9D3UD09P-WW

Code Remark: P=(Phase Dim)

9 W	11 W	36 V	250 mA	90	2000K-3000K	Up&Down	950lm	400lm	SKOI-9D3UD09P-BB



Code Remark: P=(Phase Dim)

Phase Dim | 219,00 €

NEKO / Large KOI
LED Wall Light

18W | CRI90 | 3000K | ZIGEN 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	90	3000K	30°	2100lm	1900lm	LKOI-930UD18P-WW

Code Remark: P=(Phase Dim)

18 W	20 W	36 V	500 mA	90	3000K	30°	2100lm	1300lm	LKOI-930UD18P-BB

Code Remark: P=(Phase Dim)

Phase Dim | 289,00 €

NEKO / BREEZE Single
Ceiling Mounted Spotlight
Incl. Phase Dim Driver



9W | CRI90 | 2700K | 36° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-WB

Code Remark: P=(Phase Dim)

7 W	9 W	36 V	200 mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-BB

Code Remark: P=(Phase Dim)

Phase Dim	149,00 €

NEKO / BREEZE Double
Ceiling Mounted Spotlight
Incl. Phase Dim Driver



2x9W | CRI90 | 2700K | 36° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x7 W	2x9 W	36 V	2x200 mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-WB

Code Remark: P=Phase Dim

2x7 W	2x9 W	36 V	2x200 mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-BB

Code Remark: P=Phase Dim

Phase Dim	249,00 €

NEKO / BREEZE Triple
Ceiling Mounted Spotlight
Incl. Phase Dim Driver

NEW

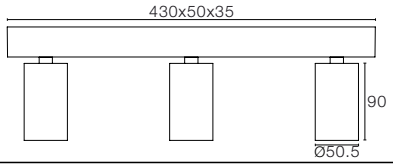

3x9W | CRI90 | 2700K | 36° | bridgelux 50,000h@L80B10 | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3x7 W	3x9 W	36 V	3x200 mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-WB

Code Remark: P=(Phase Dim)

3x7 W	3x9 W	36 V	3x200 mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-BB

Code Remark: P=(Phase Dim)

Phase Dim	329,00 €

NEKO / VIBES V1RC
Ceiling Mounted Spotlight
Incl. Phase Dim Driver

NEW

14W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RC-9273614P-WN
					3000K	36°	1500lm	1200lm	V1RC-9303614P-WN

Phase Dim | 159,00 €

Code Remark: P=(Phase Dim)

12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RC-9273614P-BN
					3000K	36°	1500lm	1200lm	V1RC-9303614P-BN

Phase Dim | 159,00 €

Code Remark: P=(Phase Dim)

NEKO / VIBES V2RC
Ceiling Mounted Spotlight
Incl. Phase Dim Driver

NEW

28W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RC-9273628P-WN
					3000K	36°	3000lm	2400lm	V2RC-9303628P-WN

Phase Dim | 309,00 €

Code Remark: P=(Phase Dim)

2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RC-9273628P-BN
					3000K	36°	3000lm	2400lm	V2RC-9303628P-BN

Phase Dim | 309,00 €

Code Remark: P=(Phase Dim)

NEKO / VIBES V1SC
Ceiling Mounted Spotlight
Incl. Phase Dim Driver

NEW



14W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-WN
					3000K	36°	1500lm	1200lm	V1SC-9303614P-WN

Phase Dim | 179,00 €

Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-BN
					3000K	36°	1500lm	1200lm	V1SC-9303614P-BN

Phase Dim | 179,00 €

Code Remark: P=(Phase Dim)

NEKO / VIBES V2SC
Ceiling Mounted Spotlight
Incl. Phase Dim Driver

NEW



28W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-WN
					3000K	36°	3000lm	2400lm	V2SC-9303628P-WN

Phase Dim | 329,00 €

Code Remark: P=(Phase Dim)

2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-BN
					3000K	36°	3000lm	2400lm	V2SC-9303628P-BN

Phase Dim | 329,00 €

Code Remark: P=(Phase Dim)

NEKO / VIBES V1RR
Recessed Spotlight
Incl. Phase Dim Driver

NEW

14W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-WN
					3000K	36°	1500lm	1200lm	V1RR-9303614P-WN

Phase Dim | 149,00 €

Code Remark: P=(Phase Dim)

12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-BN
					3000K	36°	1500lm	1200lm	V1RR-9303614P-BN

Phase Dim | 149,00 €

Code Remark: P=(Phase Dim)

NEKO / VIBES V2RR
Recessed Spotlight
Incl. Phase Dim Driver

NEW

28W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-WN
					3000K	36°	3000lm	2400lm	V2RR-9303628P-WN

Phase Dim | 309,00 €

Code Remark: P=(Phase Dim)

2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-BN
					3000K	36°	3000lm	2400lm	V2RR-9303628P-BN

Phase Dim | 309,00 €

Code Remark: P=(Phase Dim)

NEKO / VIBES V1SR
Recessed Spotlight
Incl. Phase Dim Driver

NEW

14W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-WN
					3000K	36°	1500lm	1200lm	V1SR-9303614P-WN

Phase Dim | 149,00 €

Code Remark: P=(Phase Dim)

12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-BN
					3000K	36°	1500lm	1200lm	V1SR-9303614P-BN

Phase Dim | 149,00 €

Code Remark: P=(Phase Dim)

NEKO / VIBES V2SR
Recessed Spotlight
Incl. Phase Dim Driver

NEW

28W | CRI90 | 2700K 3000K | 36° | IP20 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-WN
					3000K	36°	3000lm	2400lm	V2SR-9303628P-WN

Phase Dim | 309,00 €

Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-BN
					3000K	36°	3000lm	2400lm	V2SR-9303628P-BN

Phase Dim | 309,00 €

Code Remark: P=(Phase Dim)

NEKO / PURE Art-C

Ceiling mounted PURE Art



11W 15W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° | CITIZEN 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	640lm	PUAC-9271811F-WB
						24°	850lm	640lm	PUAC-9272411F-WB
						36°	850lm	640lm	PUAC-9273611F-WB
					3000K	18°	950lm	720lm	PUAC-9301811F-WB
						24°	950lm	720lm	PUAC-9302411F-WB
						36°	950lm	720lm	PUAC-9303611F-WB
					4000K	18°	1050lm	800lm	PUAC-9401811F-WB
						24°	1050lm	800lm	PUAC-9402411F-WB
						36°	1050lm	800lm	PUAC-9403611F-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUAC-9271815F-WB
						24°	1100lm	900lm	PUAC-9272415F-WB
						36°	1100lm	900lm	PUAC-9273615F-WB
					3000K	18°	1200lm	950lm	PUAC-9301815F-WB
						24°	1200lm	950lm	PUAC-9302415F-WB
						36°	1200lm	950lm	PUAC-9303615F-WB
					4000K	18°	1300lm	1000lm	PUAC-9401815F-WB
						24°	1300lm	1000lm	PUAC-9402415F-WB
						36°	1300lm	1000lm	PUAC-9403615F-WB

ON-OFF	169,00 €
Phase Dim	189,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	640lm	PUAC-9271811F-WB
						24°	850lm	640lm	PUAC-9272411F-WB
						36°	850lm	640lm	PUAC-9273611F-WB
					3000K	18°	950lm	720lm	PUAC-9301811F-WB
						24°	950lm	720lm	PUAC-9302411F-WB
						36°	950lm	720lm	PUAC-9303611F-WB
					4000K	18°	1050lm	800lm	PUAC-9401811F-WB
						24°	1050lm	800lm	PUAC-9402411F-WB
						36°	1050lm	800lm	PUAC-9403611F-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUAC-9271815F-WB
						24°	1100lm	900lm	PUAC-9272415F-WB
						36°	1100lm	900lm	PUAC-9273615F-WB
					3000K	18°	1200lm	950lm	PUAC-9301815F-WB
						24°	1200lm	950lm	PUAC-9302415F-WB
						36°	1200lm	950lm	PUAC-9303615F-WB
					4000K	18°	1300lm	1000lm	PUAC-9401815F-WB
						24°	1300lm	1000lm	PUAC-9402415F-WB
						36°	1300lm	1000lm	PUAC-9403615F-WB

ON-OFF	169,00 €
Phase Dim	189,00 €

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory

Honeycomb

Code for PUAC-9302511F-WB with Honeycomb
PUAC-9302511F-WB-H

Honeycomb: +9,00€

NEKO / PURE S-C

Ceiling mounted PURE S

15W 21W | CRI90 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | UGR < 10 | IP 20 | 5 YEARS GUARANTEE | CB CE

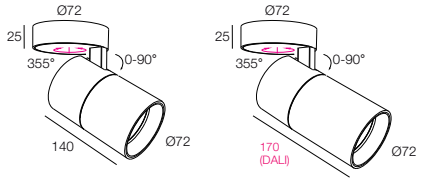

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUSC-9271515F-WB
						25°	1400lm	1100lm	PUSC-9272515F-WB
						30°	1400lm	1100lm	PUSC-9273015F-WB
					3000K	15°	1500lm	1200lm	PUSC-9301515F-WB
						25°	1500lm	1200lm	PUSC-9302515F-WB
						30°	1500lm	1200lm	PUSC-9303015F-WB
					4000K	15°	1600lm	1300lm	PUSC-9401515F-WB
						25°	1600lm	1300lm	PUSC-9402515F-WB
						30°	1600lm	1300lm	PUSC-9403015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUSC-9271521F-WB
						25°	1900lm	1500lm	PUSC-9272521F-WB
						30°	1900lm	1500lm	PUSC-9273021F-WB
					3000K	15°	2000lm	1600lm	PUSC-9301521F-WB
						25°	2000lm	1600lm	PUSC-9302521F-WB
						30°	2000lm	1600lm	PUSC-9303021F-WB
					4000K	15°	2100lm	1700lm	PUSC-9401521F-WB
						25°	2100lm	1700lm	PUSC-9402521F-WB
						30°	2100lm	1700lm	PUSC-9403021F-WB

ON-OFF	179,00 €
Phase Dim	199,00 €
DALI Dim	339,00 €

ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	339,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUSC-9271515F-BB
						25°	1400lm	1100lm	PUSC-9272515F-BB
						30°	1400lm	1100lm	PUSC-9273015F-BB
					3000K	15°	1500lm	1200lm	PUSC-9301515F-BB
						25°	1500lm	1200lm	PUSC-9302515F-BB
						30°	1500lm	1200lm	PUSC-9303015F-BB
					4000K	15°	1600lm	1300lm	PUSC-9401515F-BB
						25°	1600lm	1300lm	PUSC-9402515F-BB
						30°	1600lm	1300lm	PUSC-9403015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUSC-9271521F-BB
						25°	1900lm	1500lm	PUSC-9272521F-BB
						30°	1900lm	1500lm	PUSC-9273021F-BB
					3000K	15°	2000lm	1600lm	PUSC-9301521F-BB
						25°	2000lm	1600lm	PUSC-9302521F-BB
						30°	2000lm	1600lm	PUSC-9303021F-BB
					4000K	15°	2100lm	1700lm	PUSC-9401521F-BB
						25°	2100lm	1700lm	PUSC-9402521F-BB
						30°	2100lm	1700lm	PUSC-9403021F-BB

ON-OFF	179,00 €
Phase Dim	199,00 €
DALI Dim	339,00 €

ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	339,00 €

Code Remark: F=(ON-OFF) P=(Phase Dim) D=(DALI Dim)

Optional accessory

Honeycomb

Code for PUSC-9302515F-WB with Honeycomb
PUSC-9302515F-WB-H

Honeycomb: +9,00€

NEKO / PURE Art
LED Tracklight

15W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815F-WB
						24°	1100lm	900lm	PUA2- 9272415F-WB
						36°	1100lm	900lm	PUA2- 9273615F-WB
					3000K	18°	1200lm	950lm	PUA2- 9301815F-WB
						24°	1200lm	950lm	PUA2- 9302415F-WB
						36°	1200lm	950lm	PUA2- 9303615F-WB
					4000K	18°	1300lm	1000lm	PUA2- 9401815F-WB
						24°	1300lm	1000lm	PUA2- 9402415F-WB
						36°	1300lm	1000lm	PUA2- 9403615F-WB

ON-OFF	139,00 €
Phase Dim	159,00 €

13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815F-BB
						24°	1100lm	900lm	PUA2- 9272415F-BB
						36°	1100lm	900lm	PUA2- 9273615F-BB
					3000K	18°	1200lm	950lm	PUA2- 9301815F-BB
						24°	1200lm	950lm	PUA2- 9302415F-BB
						36°	1200lm	950lm	PUA2- 9303615F-BB
					4000K	18°	1300lm	1000lm	PUA2- 9401815F-BB
						24°	1300lm	1000lm	PUA2- 9402415F-BB
						36°	1300lm	1000lm	PUA2- 9403615F-BB

ON-OFF	139,00 €
Phase Dim	159,00 €

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory

Honeycomb

Code for PUA2-930 1815F-WB with Honeycomb
PUA2-930 1815F- WB-H

Honeycomb: +9,00€

Track System

Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / PURE S
LED Tracklight

21W 15W | CRI90 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515F-WB
						25°	1400lm	1100lm	PUS1- 9272515F-WB
						30°	1400lm	1100lm	PUS1- 9273015F-WB
					3000K	15°	1500lm	1200lm	PUS1- 9301515F-WB
						25°	1500lm	1200lm	PUS1- 9302515F-WB
						30°	1500lm	1200lm	PUS1- 9303015F-WB
					3000K	15°	1600lm	1300lm	PUS1- 9401515F-WB
						25°	1600lm	1300lm	PUS1- 9402515F-WB
						30°	1600lm	1300lm	PUS1- 9403015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2- 9271521F-WB
						25°	1900lm	1500lm	PUS2- 9272521F-WB
						30°	1900lm	1500lm	PUS2- 9273021F-WB
					3000K	15°	2000lm	1600lm	PUS2- 9301521F-WB
						25°	2000lm	1600lm	PUS2- 9302521F-WB
						30°	2000lm	1600lm	PUS2- 9303021F-WB
					4000K	15°	2100lm	1700lm	PUS2- 9401521F-WB
						25°	2100lm	1700lm	PUS2- 9402521F-WB
						30°	2100lm	1700lm	PUS2- 9403021F-WB

ON-OFF	179,00 €
Phase Dim	199,00 €

ON-OFF	189,00 €
Phase Dim	209,00 €

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515F-BB
						25°	1400lm	1100lm	PUS1- 9272515F-BB
						30°	1400lm	1100lm	PUS1- 9273015F-BB
					3000K	15°	1500lm	1200lm	PUS1- 9301515F-BB
						25°	1500lm	1200lm	PUS1- 9302515F-BB
						30°	1500lm	1200lm	PUS1- 9303015F-BB
					4000K	15°	1600lm	1300lm	PUS1- 9401515F-BB
						25°	1600lm	1300lm	PUS1- 9402515F-BB
						30°	1600lm	1300lm	PUS1- 9403015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2- 9271521F-BB
						25°	1900lm	1500lm	PUS2- 9272521F-BB
						30°	1900lm	1500lm	PUS2- 9273021F-BB
					3000K	15°	2000lm	1600lm	PUS2- 9301521F-BB
						25°	2000lm	1600lm	PUS2- 9302521F-BB
						30°	2000lm	1600lm	PUS2- 9303021F-BB
					4000K	15°	2100lm	1700lm	PUS2- 9401521F-BB
						25°	2100lm	1700lm	PUS2- 9402521F-BB
						30°	2100lm	1700lm	PUS2- 9403021F-BB

ON-OFF	179,00 €
Phase Dim	199,00 €

ON-OFF	189,00 €
Phase Dim	209,00 €

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory

Honeycomb

Code for PUS1-930 1515F-WB with Honeycomb
PUS1-930 1515F-WB-H

Honeycomb: +9,00€

Track System

Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / PURE S
LED Tracklight

21W 15W | CRI90 | 2700K 3000K 4000K | 15° 25° 30° | CITIZEN 50,000h@L80B10 | GLOBAL | UGR < 19 | IP 20 | DALI | 5 YEARS GUARANTEE | CB | CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515D-WB
						25°	1400lm	1100lm	PUS1- 9272515D-WB
						30°	1400lm	1100lm	PUS1- 9273015D-WB
					3000K	15°	1500lm	1200lm	PUS1- 9301515D-WB
DALI Dim	319,00 €					25°	1500lm	1200lm	PUS1- 9302515D-WB
						30°	1500lm	1200lm	PUS1- 9303015D-WB
					4000K	15°	1600lm	1300lm	PUS1- 9401515D-WB
						25°	1600lm	1300lm	PUS1- 9402515D-WB
						30°	1600lm	1300lm	PUS1- 9403015D-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2- 9271521D-WB
						25°	1900lm	1500lm	PUS2- 9272521D-WB
						30°	1900lm	1500lm	PUS2- 9273021D-WB
					3000K	15°	2000lm	1600lm	PUS2- 9301521D-WB
DALI Dim	329,00 €					25°	2000lm	1600lm	PUS2- 9302521D-WB
						30°	2000lm	1600lm	PUS2- 9303021D-WB
					4000K	15°	2100lm	1700lm	PUS2- 9401521D-WB
						25°	2100lm	1700lm	PUS2- 9402521D-WB
						30°	2100lm	1700lm	PUS2- 9403021D-WB

13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515D-BB
						25°	1400lm	1100lm	PUS1- 9272515D-BB
						30°	1400lm	1100lm	PUS1- 9273015D-BB
					3000K	15°	1500lm	1200lm	PUS1- 9301515D-BB
DALI Dim	319,00 €					25°	1500lm	1200lm	PUS1- 9302515D-BB
						30°	1500lm	1200lm	PUS1- 9303015D-BB
					4000K	15°	1600lm	1300lm	PUS1- 9401515D-BB
						25°	1600lm	1300lm	PUS1- 9402515D-BB
						30°	1600lm	1300lm	PUS1- 9403015D-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2- 9271521D-BB
						25°	1900lm	1500lm	PUS2- 9272521D-BB
						30°	1900lm	1500lm	PUS2- 9273021D-BB
					3000K	15°	2000lm	1600lm	PUS2- 9301521D-BB
DALI Dim	329,00 €					25°	2000lm	1600lm	PUS2- 9302521D-BB
						30°	2000lm	1600lm	PUS2- 9303021D-BB
					4000K	15°	2100lm	1700lm	PUS2- 9401521D-BB
						25°	2100lm	1700lm	PUS2- 9402521D-BB
						30°	2100lm	1700lm	PUS2- 9403021D-BB

Code Remark: D=(DALI Dim)

Optional accessory

Honeycomb

Code for PUS1-930 1515D-WB with Honeycomb
PUS1-930 1515D-WB-H

Honeycomb: +9,00€

Track System

Compatible with GLOBAL 3-Circuit Track System

NEKO / PURE M
LED Tracklight

28W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828F-WB
						30°	3200lm	2500lm	PUM1- 9273028F-WB
						45°	3200lm	2500lm	PUM1- 9274528F-WB
ON-OFF	219,00 €				3000K	18°	3400lm	2700lm	PUM1- 9301828F-WB
						30°	3400lm	2700lm	PUM1- 9303028F-WB
						45°	3400lm	2700lm	PUM1- 9304528F-WB
					4000K	18°	3600lm	2900lm	PUM1- 9401828F-WB
						30°	3600lm	2900lm	PUM1- 9403028F-WB
						45°	3600lm	2900lm	PUM1- 9404528F-WB

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828F-BB
						30°	3200lm	2500lm	PUM1- 9273028F-BB
						45°	3200lm	2500lm	PUM1- 9274528F-BB
ON-OFF	219,00 €				3000K	18°	3400lm	2700lm	PUM1- 9301828F-BB
						30°	3400lm	2700lm	PUM1- 9303028F-BB
						45°	3400lm	2700lm	PUM1- 9304528F-BB
					4000K	18°	3600lm	2900lm	PUM1- 9401828F-BB
						30°	3600lm	2900lm	PUM1- 9403028F-BB
						45°	3600lm	2900lm	PUM1- 9404528F-BB

Code Remark: F=(ON-OFF)

28W | CRI90 | 2700K 3000K 4000K | 18° 30° 45° | CITIZEN 50,000h@L80B10 | GLOBAL | UGR < 19 | IP 20 | DALI | 5 YEARS GUARANTEE | CB CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828D-WB
						30°	3200lm	2500lm	PUM1- 9273028D-WB
						45°	3200lm	2500lm	PUM1- 9274528D-WB
DALI Dim	339,00 €				3000K	18°	3400lm	2700lm	PUM1- 9301828D-WB
						30°	3400lm	2700lm	PUM1- 9303028D-WB
						45°	3400lm	2700lm	PUM1- 9304528D-WB
					4000K	18°	3600lm	2900lm	PUM1- 9401828D-WB
						30°	3600lm	2900lm	PUM1- 9403028D-WB
						45°	3600lm	2900lm	PUM1- 9404528D-WB

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828D-BB
						30°	3200lm	2500lm	PUM1- 9273028D-BB
						45°	3200lm	2500lm	PUM1- 9274528D-BB
DALI Dim	339,00 €				3000K	18°	3400lm	2700lm	PUM1- 9301828D-BB
						30°	3400lm	2700lm	PUM1- 9303028D-BB
						45°	3400lm	2700lm	PUM1- 9304528D-BB
					4000K	18°	3600lm	2900lm	PUM1- 9401828D-BB
						30°	3600lm	2900lm	PUM1- 9403028D-BB
						45°	3600lm	2900lm	PUM1- 9404528D-BB

Code Remark: D=(DALI Dim)

Optional accessory

Honeycomb

Code for PUM1-930 1828D-WB with Honeycomb
PUM1-930 1828D-WB-H

Honeycomb: +9,00€

Track System

Compatible with GLOBAL 3-Circuit Track System

NEKO / ROXY Art
In-Track Driver LED Tracklight



15W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-WB
						24°	1200lm	900lm	ROA1-9272415F-WB
						36°	1200lm	900lm	ROA1-9273615F-WB
						50°	1200lm	900lm	ROA1-9275015F-WB
ON-OFF		149,00 €			3000K	18°	1300lm	950lm	ROA1-9301815F-WB
						24°	1300lm	950lm	ROA1-9302415F-WB
						36°	1300lm	950lm	ROA1-9303615F-WB
						50°	1300lm	950lm	ROA1-9306015F-WB
					4000K	18°	1400lm	1000lm	ROA1-9401815F-WB
						24°	1400lm	1000lm	ROA1-9402415F-WB
						36°	1400lm	1000lm	ROA1-9403615F-WB
						50°	1400lm	1000lm	ROA1-9405015F-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-BB
						24°	1200lm	900lm	ROA1-9272415F-BB
						36°	1200lm	900lm	ROA1-9273615F-BB
						50°	1200lm	900lm	ROA1-9275015F-BB
ON-OFF		149,00 €			3000K	18°	1300lm	950lm	ROA1-9301815F-BB
						24°	1300lm	950lm	ROA1-9302415F-BB
						36°	1300lm	950lm	ROA1-9303615F-BB
						50°	1300lm	950lm	ROA1-9306015F-BB
					4000K	18°	1400lm	1000lm	ROA1-9401815F-BB
						24°	1400lm	1000lm	ROA1-9402415F-BB
						36°	1400lm	1000lm	ROA1-9403615F-BB
						50°	1400lm	1000lm	ROA1-9405015F-BB

Code Remark: F=(ON-OFF)



15W | CRI90 | 2700K 3000K 4000K | 18° 24° 36° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE | DALI 2

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-WB
						24°	1200lm	900lm	ROA1-9272415D-WB
						36°	1200lm	900lm	ROA1-9273615D-WB
						50°	1200lm	900lm	ROA1-9275015D-WB
DALI Dim		229,00 €			3000K	18°	1300lm	950lm	ROA1-9301815D-WB
						24°	1300lm	950lm	ROA1-9302415D-WB
						36°	1300lm	950lm	ROA1-9303615D-WB
						50°	1300lm	950lm	ROA1-9306015D-WB
					4000K	18°	1400lm	1000lm	ROA1-9401815D-WB
						24°	1400lm	1000lm	ROA1-9402415D-WB
						36°	1400lm	1000lm	ROA1-9403615D-WB
						50°	1400lm	1000lm	ROA1-9405015D-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-BB
						24°	1200lm	900lm	ROA1-9272415D-BB
						36°	1200lm	900lm	ROA1-9273615D-BB
						50°	1200lm	900lm	ROA1-9275015D-BB
DALI Dim		229,00 €			3000K	18°	1300lm	950lm	ROA1-9301815D-BB
						24°	1300lm	950lm	ROA1-9302415D-BB
						36°	1300lm	950lm	ROA1-9303615D-BB
						50°	1300lm	950lm	ROA1-9306015D-BB
					4000K	18°	1400lm	1000lm	ROA1-9401815D-BB
						24°	1400lm	1000lm	ROA1-9402415D-BB
						36°	1400lm	1000lm	ROA1-9403615D-BB
						50°	1400lm	1000lm	ROA1-9405015D-BB

Code Remark: D=(DALI Dim)

Optional accessory

Honeycomb

Code for ROA1-930 1815D-WB with Honeycomb
ROA1-930 1815D-WB-H

Honeycomb: +9,00€

NEKO / ROXY S

In-Track Driver LED Tracklight



15W 21W | CRI90 | 2700K 3000K 4000K | 15° 30° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515F-WB
						30°	1400lm	1100lm	ROS1-9273015F-WB
						50°	1400lm	850lm	ROS1-9275015F-WB
ON-OFF		149,00 €			3000K	15°	1500lm	1200lm	ROS1-9301515F-WB
						30°	1500lm	1200lm	ROS1-9303015F-WB
						50°	1500lm	900lm	ROS1-9305015F-WB
					4000K	15°	1600lm	1300lm	ROS1-9401515F-WB
						30°	1600lm	1300lm	ROS1-9403015F-WB
						50°	1600lm	1000lm	ROS1-9405015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521F-WB
						30°	1900lm	1500lm	ROS2-9273021F-WB
						50°	1900lm	1100lm	ROS2-9275021F-WB
ON-OFF		149,00 €			3000K	15°	2000lm	1600lm	ROS2-9301521F-WB
						30°	2000lm	1600lm	ROS2-9303021F-WB
						50°	2000lm	1200lm	ROS2-9305021F-WB
					4000K	15°	2100lm	1700lm	ROS2-9401821F-WB
						30°	2100lm	1700lm	ROS2-9403021F-WB
						50°	2100lm	1300lm	ROS2-9405021F-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515F-BB
						30°	1400lm	1100lm	ROS1-9273015F-BB
						50°	1400lm	850lm	ROS1-9275015F-BB
ON-OFF		149,00 €			3000K	15°	1500lm	1200lm	ROS1-9301515F-BB
						30°	1500lm	1200lm	ROS1-9303015F-BB
						50°	1500lm	900lm	ROS1-9305015F-BB
					4000K	15°	1600lm	1300lm	ROS1-9401515F-BB
						30°	1600lm	1300lm	ROS1-9403015F-BB
						50°	1600lm	1000lm	ROS1-9405015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521F-BB
						30°	1900lm	1500lm	ROS2-9273021F-BB
						50°	1900lm	1100lm	ROS2-9275021F-BB
ON-OFF		149,00 €			3000K	15°	2000lm	1600lm	ROS2-9301521F-BB
						30°	2000lm	1600lm	ROS2-9303021F-BB
						50°	2000lm	1200lm	ROS2-9305021F-BB
					4000K	15°	2100lm	1700lm	ROS2-9401821F-BB
						30°	2100lm	1700lm	ROS2-9403021F-BB
						50°	2100lm	1300lm	ROS2-9405021F-BB



Code Remark: F=(ON-OFF)

NEKO / ROXY S
In-Track Driver LED Tracklight



15W 21W | CRI90 | 2700K 3000K 4000K | 15° 30° 50° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | DALI 2



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515D-WB
						30°	1400lm	1100lm	ROS1-9273015D-WB
						50°	1400lm	850lm	ROS1-9275015D-WB
					3000K	15°	1500lm	1200lm	ROS1-9301515D-WB
DALI Dim		229,00 €				30°	1500lm	1200lm	ROS1-9303015D-WB
						50°	1500lm	900lm	ROS1-9305015D-WB
					4000K	15°	1600lm	1300lm	ROS1-9401515D-WB
						30°	1600lm	1300lm	ROS1-9403015D-WB
						50°	1600lm	1000lm	ROS1-9405015D-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521D-WB
						30°	1900lm	1500lm	ROS2-9273021D-WB
						50°	1900lm	1500lm	ROS2-9275021D-WB
					3000K	15°	2000lm	1600lm	ROS2-9301521D-WB
DALI Dim		229,00 €				30°	2000lm	1600lm	ROS2-9303021D-WB
						50°	2000lm	1600lm	ROS2-9305021D-WB
					4000K	15°	2100lm	1700lm	ROS2-9401821D-WB
						30°	2100lm	1700lm	ROS2-9403021D-WB
						50°	2100lm	1700lm	ROS2-9405021D-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515D-BB
						30°	1400lm	1100lm	ROS1-9273015D-BB
						50°	1400lm	850lm	ROS1-9275015D-BB
					3000K	15°	1500lm	1200lm	ROS1-9301515D-BB
DALI Dim		229,00 €				30°	1500lm	1200lm	ROS1-9303015D-BB
						50°	1500lm	900lm	ROS1-9305015D-BB
					4000K	15°	1600lm	1300lm	ROS1-9401515D-BB
						30°	1600lm	1300lm	ROS1-9403015D-BB
						50°	1600lm	1000lm	ROS1-9405015F-BB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521D-BB
						30°	1900lm	1500lm	ROS2-9273021D-BB
						50°	1900lm	1100lm	ROS2-9275021D-BB
					3000K	15°	2000lm	1600lm	ROS2-9301521D-BB
DALI Dim		229,00 €				30°	2000lm	1600lm	ROS2-9303021D-BB
						50°	2000lm	1200lm	ROS2-9305021D-BB
					4000K	15°	2100lm	1700lm	ROS2-9401821D-BB
						30°	2100lm	1700lm	ROS2-9403021D-BB
						50°	2100lm	1300lm	ROS2-9405021D-BB

Code Remark: D=(DALI Dim)

Optional accessory

Honeycomb

Code for ROS1-930 2515D-WB with Honeycomb
ROS1-930 2515D-WB-H

Honeycomb: +9,00€

Track System

Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / ROXY K
In-Track Driver LED Tracklight



28W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-WB
						35°	2500lm	2200lm	ROK1-9273528F-WB
						55°	2500lm	2200lm	ROK1-9275528F-WB
ON-OFF		199,00 €			3000K	20°	2700lm	2200lm	ROK1-9302028F-WB
						35°	2700lm	2400lm	ROK1-9303528F-WB
						55°	2700lm	2400lm	ROK1-9305528F-WB
					4000K	20°	2900lm	2400lm	ROK1-9402028F-WB
						35°	2900lm	2600lm	ROK1-9403528F-WB
						55°	2900lm	2600lm	ROK1-9405528F-WB

25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-BB
						35°	2500lm	2200lm	ROK1-9273528F-BB
						55°	2500lm	2200lm	ROK1-9275528F-BB
ON-OFF		199,00 €			3000K	20°	2700lm	2200lm	ROK1-9302028F-BB
						35°	2700lm	2400lm	ROK1-9303528F-BB
						55°	2700lm	2400lm	ROK1-9305528F-BB
					4000K	20°	2900lm	2400lm	ROK1-9402028F-BB
						35°	2900lm	2600lm	ROK1-9403528F-BB
						55°	2900lm	2600lm	ROK1-9405528F-BB

Code Remark: F=(ON-OFF)



28W | CRI90 | 2700K 3000K 4000K | 20° 35° 55° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | DALI 2

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-WB
						35°	2500lm	2200lm	ROK1-9273528D-WB
						55°	2500lm	2200lm	ROK1-9275528D-WB
DALI Dim		289,00 €			3000K	20°	2700lm	2200lm	ROK1-9302028D-WB
						35°	2700lm	2400lm	ROK1-9303528D-WB
						55°	2700lm	2400lm	ROK1-9305528D-WB
					4000K	20°	2900lm	2400lm	ROK1-9402028D-WB
						35°	2900lm	2600lm	ROK1-9403528D-WB
						55°	2900lm	2600lm	ROK1-9405528D-WB

25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-BB
						35°	2500lm	2200lm	ROK1-9273528D-BB
						55°	2500lm	2200lm	ROK1-9275528D-BB
DALI Dim		289,00 €			3000K	20°	2700lm	2200lm	ROK1-9302028D-BB
						35°	2700lm	2400lm	ROK1-9303528D-BB
						55°	2700lm	2400lm	ROK1-9305528D-BB
					4000K	20°	2900lm	2400lm	ROK1-9402028D-BB
						35°	2900lm	2600lm	ROK1-9403528D-BB
						55°	2900lm	2600lm	ROK1-9405528D-BB

Code Remark: D=(DALI Dim)

Optional accessory

Honeycomb

Code for ROK1-930 3528F-WB with Honeycomb
ROK1-930 3528F-WB-H

Honeycomb: +9,00€

Track System

Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / ROXY Art-Z
In-Track Driver LED Tracklight

15W | CRI90 | 2700K 3000K 4000K | 20°~35° | 35°~60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | DALI 2

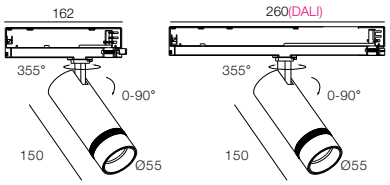

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°~35°	1200lm	1000lm	ROA1-927Z315F-WB
					3000K	20°~35°	1300lm	1100lm	ROA1-930Z315F-WB
					4000K	20°~35°	1400lm	1200lm	ROA1-940Z315F-WB
					2700K	35°~60°	1200lm	950lm	ROA1-927Z615F-WB
					3000K	35°~60°	1300lm	1000lm	ROA1-930Z615F-WB
					4000K	35°~60°	1400lm	1100lm	ROA1-940Z615F-WB

ON-OFF	169,00 €
DALI Dim	259,00 €

13 W	15 W	36 V	350 mA	90	2700K	20°~35°	1200lm	1000lm	ROA1-927Z315F-BB
					3000K	20°~35°	1300lm	1100lm	ROA1-930Z315F-BB
					4000K	20°~35°	1400lm	1200lm	ROA1-940Z315F-BB
					2700K	35°~60°	1200lm	950lm	ROA1-927Z615F-BB
					3000K	35°~60°	1300lm	1000lm	ROA1-930Z615F-BB
					4000K	35°~60°	1400lm	1100lm	ROA1-940Z615F-BB

ON-OFF	169,00 €
DALI Dim	259,00 €

Code Remark: F=(ON-OFF) D=(DALI Dim)

Optional accessory

Honeycomb

Code for ROA1-930Z315F-WB with Honeycomb
ROA1-930Z315F-WB-H

Honeycomb: +9,00€

Track System

Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / ROXY S-Z

In-Track Driver LED Tracklight

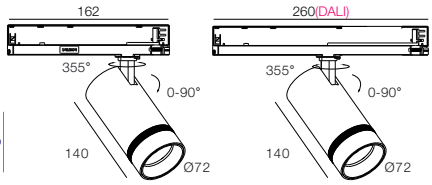

15W 21W | CRI90 | 2700K 3000K 4000K | 18°~35° | 35°~60° | CITIZEN 50,000h@L80B10 | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | DALI 2

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-WB
					3000K	18°~35°	1500lm	1300lm	ROS1-930Z315F-WB
					4000K	18°~35°	1600lm	1400lm	ROS1-940Z315F-WB
					2700K	35°~60°	1400lm	1100lm	ROS1-927Z615F-WB
					3000K	35°~60°	1500lm	1200lm	ROS1-930Z615F-WB
					4000K	35°~60°	1600lm	1300lm	ROS1-940Z615F-WB
18 W	21 W	36 V	500 mA	90	2700K	18°~35°	1900lm	1600lm	ROS2-927Z321F-WB
					3000K	18°~35°	2000lm	1700lm	ROS2-930Z321F-WB
					4000K	18°~35°	2100lm	1800lm	ROS2-940Z321F-WB
					2700K	35°~60°	1900lm	1500lm	ROS2-927Z621F-WB
					3000K	35°~60°	2000lm	1600lm	ROS2-930Z621F-WB
					4000K	35°~60°	2100lm	1700lm	ROS2-940Z621F-WB

ON-OFF	169,00 €
DALI Dim	259,00 €



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-BB
					3000K	18°~35°	1500lm	1300lm	ROS1-930Z315F-BB
					4000K	18°~35°	1600lm	1400lm	ROS1-940Z315F-BB
					2700K	35°~60°	1400lm	1100lm	ROS1-927Z615F-BB
					3000K	35°~60°	1500lm	1200lm	ROS1-930Z615F-BB
					4000K	35°~60°	1600lm	1300lm	ROS1-940Z615F-BB
18 W	21 W	36 V	500 mA	90	2700K	18°~35°	1900lm	1600lm	ROS2-927Z321F-BB
					3000K	18°~35°	2000lm	1700lm	ROS2-930Z321F-BB
					4000K	18°~35°	2100lm	1800lm	ROS2-940Z321F-BB
					2700K	35°~60°	1900lm	1500lm	ROS2-927Z621F-BB
					3000K	35°~60°	2000lm	1600lm	ROS2-930Z621F-BB
					4000K	35°~60°	2100lm	1700lm	ROS2-940Z621F-BB

ON-OFF	169,00 €
DALI Dim	259,00 €

Code Remark: F=(ON-OFF) D=(DALI Dim)

Optional accessory

Honeycomb

Code for ROS1-930Z315F-WB with Honeycomb
ROS1-930Z315F-WB-H

Honeycomb: +9,00€

Track System

Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / INLINE
Single Phase LED Tracklight System

NEW

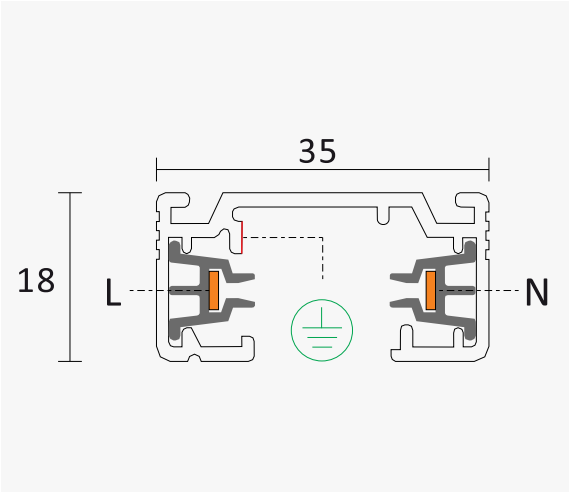

Quick Info

- Aluminum extrusion track shell
- 2 pieces copper busbars, insulated by plastic
- Single circuit track system for 16A (3500W) input
- Track length available in 1000mm and 2000mm
- Various connectors and accessories available for building comprehensive lighting system
- Color finish in White(RAL9003) or Black(RAL9005)
- Surface mounted

Load of Track





Connection Diagram

Example A:

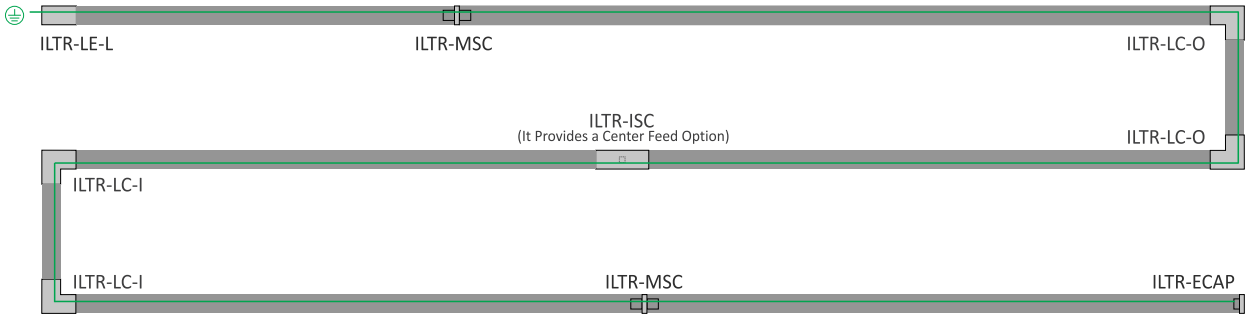

Example B:

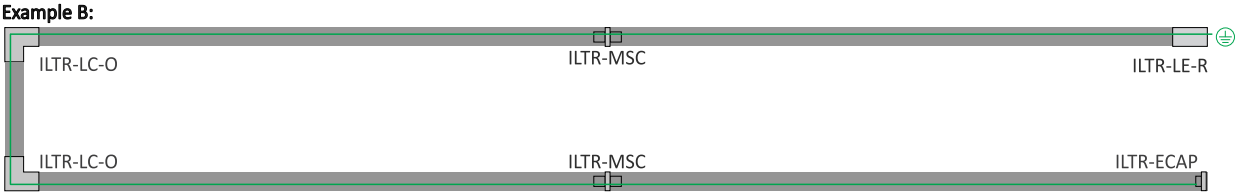

NEKO / INLINE
Single Phase LED Tracklight System

NEW



11W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B50 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	36°	900lm	700lm	ILST-9273611P-WB
9 W	11 W	18 V	500 mA	90	2700K	36°	900lm	700lm	ILST-9273611P-BB

Code Remark: P=Phase Dim

Phase Dim | 109,00 €

NEKO / INLINE
Single Phase LED Tracklight System

NEW



8W | CRI90 | 2700K | 36° | CITIZEN 50,000h@L80B50 | UGR <19 | IP20 | 5 YEARS GUARANTEE | CE

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	2700K	36°	700lm	500lm	ILSP-9273608P-WB
6 W	8 W	18 V	350 mA	90	2700K	36°	700lm	500lm	ILSP-9273608P-BB

Code Remark: P=Phase Dim

Phase Dim | 149,00 €

NEW



INLINE Single Phase Track

Description	Code/Model	
INLINE Single Phase Track, 1000mm Length, White	ILTR-1000-FP-W	49,00 €
INLINE Single Phase Track, 1000mm Length, Black	ILTR-1000-FP-B	
INLINE Single Phase Track, 2000mm Length, White	ILTR-2000-FP-W	89,00 €
INLINE Single Phase Track, 2000mm Length, Black	ILTR-2000-FP-B	



Live End Connector

Description	Code/Model	
Live End Connector, Left, White	ILTR-LE-L-W	14,50 €
Live End Connector, Left, Black	ILTR-LE-L-B	
Live End Connector, Right, White	ILTR-LE-R-W	
Live End Connector, Right, Black	ILTR-LE-R-B	



I Straight Connector

Description	Code/Model	
I Straight Connector, It Provides a Center Feed Option, White	ILTR-ISC-W	24,50 €
I Straight Connector, It Provides a Center Feed Option, Black	ILTR-ISC-B	



L Connector

Description	Code/Model	
L Connector, Outer, White	ILTR-LC-O-W	24,50 €
L Connector, Outer, Black	ILTR-LC-O-B	
L Connector, Inner, White	ILTR-LC-I-W	
L Connector, Inner, Black	ILTR-LC-I-B	



Mini Straight Connector

Description	Code/Model	
Mini Straight Connector, White	ILTR-MSC-W	9,50 €
Mini Straight Connector, Black	ILTR-MSC-B	



Endcap

Description	Code/Model	
Endcap, White	ILTR-ECAP-W	4,50 €
Endcap, Black	ILTR-ECAP-B	

NEKO / VANILLA / VANF-C5A3

360° Circular Neon Strip Lighting

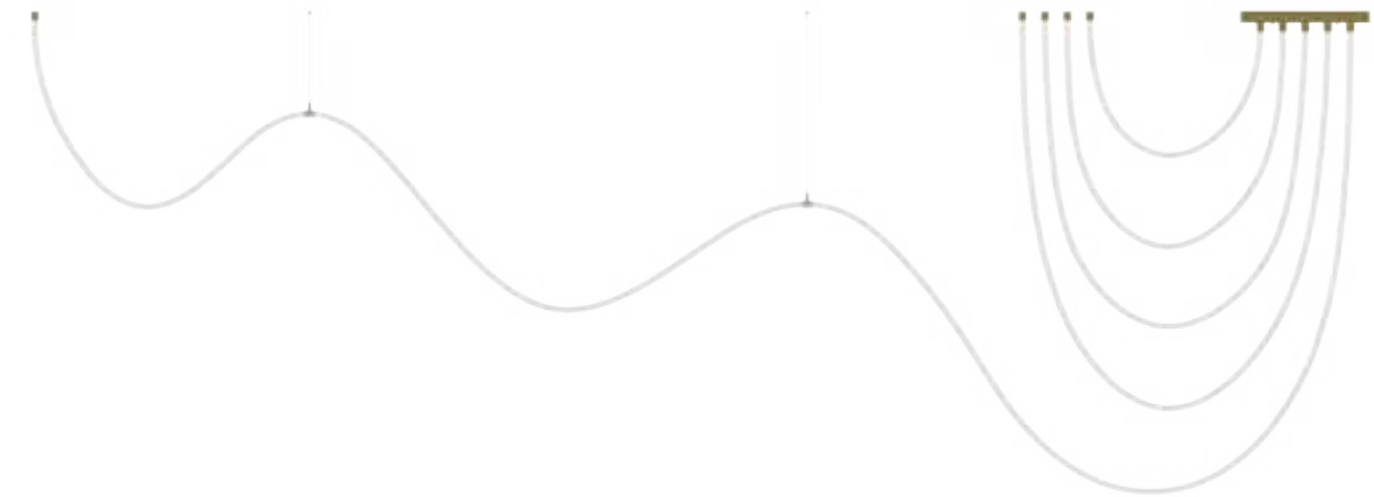

178W | CRI90 | 3000K 4000K | 360° | IP65 | 3 YEAR GUARANTEE | CB | CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
178 W	182 W	24 VDC	90	3000K	360°	12300lm	White	VANF-C5A3-178W-930-WN	VANF-C5A3-930C6A8F-WN
							Black	VANF-C5A3-178W-930-BN	VANF-C5A3-930C6A8F-BN
							Chrome	VANF-C5A3-178W-930-CN	VANF-C5A3-930C6A8F-CN
							Gold	VANF-C5A3-178W-930-GN	VANF-C5A3-930C6A8F-GN
				4000K	360°	13500lm	White	VANF-C5A3-178W-940-WN	VANF-C5A3-940C6A8F-WN
							Black	VANF-C5A3-178W-940-BN	VANF-C5A3-940C6A8F-BN
							Chrome	VANF-C5A3-178W-940-CN	VANF-C5A3-940C6A8F-CN
							Gold	VANF-C5A3-178W-940-GN	VANF-C5A3-940C6A8F-GN

ohne / none	1789,00 €
ON-OFF	1979,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-C1A

360° Circular Neon Strip Lighting

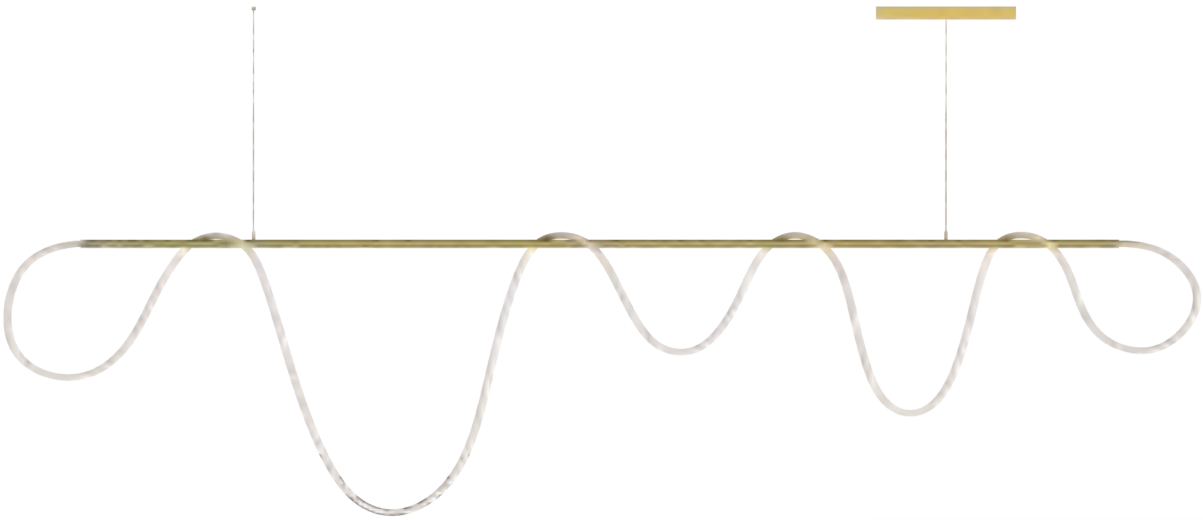

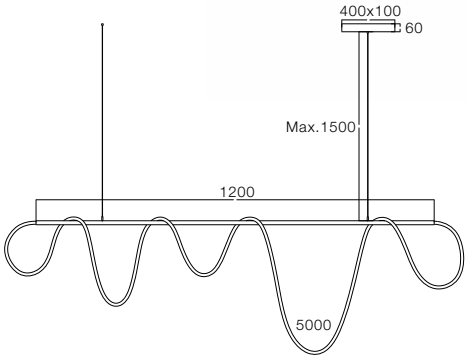

73W | CRI90 | 3000K 4000K | 360° | IP 65 | CB | CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-C1A-73W-930-WN	VANF-C1A-930C673F-WN
							Black	VANF-C1A-73W-930-BN	VANF-C1A-930C673F-BN
ON-OFF	939,00 €						Chrome	VANF-C1A-73W-930-CN	VANF-C1A-930C673F-CN
							Gold	VANF-C1A-73W-930-GN	VANF-C1A-930C673F-GN
				4000K	360°	5500lm	White	VANF-C1A-73W-940-WN	VANF-C1A-940C673F-WN
							Black	VANF-C1A-73W-940-BN	VANF-C1A-940C673F-BN
							Chrome	VANF-C1A-73W-940-CN	VANF-C1A-940C673F-CN
							Gold	VANF-C1A-73W-940-GN	VANF-C1A-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-SV06-SM & VANF-SV06-SUS

360° Circular Neon Strip Lighting

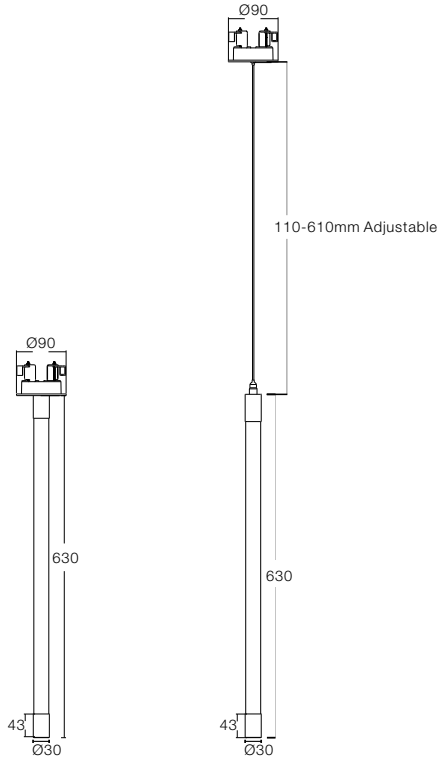

VANF-SV06-SM VANF-SV06-SUS

8.5W | CRI90 | 3000K 4000K | 360° | IP 65 | 3 YEARS GUARANTEE | CB | CE | 75

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
8.5 W	10 W	24 VDC	90	3000K	360°	600lm	White	VANF-SV06-SM-8.5W-930-WN	VANF-SV06-SM-930C609F-WN
							Black	VANF-SV06-SM-8.5W-930-BN	VANF-SV06-SM-930C609F-BN
							Chrome	VANF-SV06-SM-8.5W-930-CN	VANF-SV06-SM-930C609F-CN
							Gold	VANF-SV06-SM-8.5W-930-GN	VANF-SV06-SM-930C609F-GN
				4000K	360°	650lm	White	VANF-SV06-SM-8.5W-940-WN	VANF-SV06-SM-940C609F-WN
							Black	VANF-SV06-SM-8.5W-940-BN	VANF-SV06-SM-940C609F-BN
							Chrome	VANF-SV06-SM-8.5W-940-CN	VANF-SV06-SM-940C609F-CN
							Gold	VANF-SV06-SM-8.5W-940-GN	VANF-SV06-SM-940C609F-GN
8. 5 W	10 W	24 VDC	90	3000K	360°	600lm	White	VANF-SV06-SUS-8.5W-930-WN	VANF-SV06-SUS-930C609F-WN
							Black	VANF-SV06-SUS-8.5W-930-BN	VANF-SV06-SUS-930C609F-BN
							Chrome	VANF-SV06-SUS-8.5W-930-CN	VANF-SV06-SUS-930C609F-CN
							Gold	VANF-SV06-SUS-8.5W-930-GN	VANF-SV06-SUS-930C609F-GN
				4000K	360°	650lm	White	VANF-SV06-SUS-8.5W-940-WN	VANF-SV06-SUS-940C609F-WN
							Black	VANF-SV06-SUS-8.5W-940-BN	VANF-SV06-SUS-940C609F-BN
							Chrome	VANF-SV06-SUS-8.5W-940-CN	VANF-SV06-SUS-940C609F-CN
							Gold	VANF-SV06-SUS-8.5W-940-GN	VANF-SV06-SUS-940C609F-GN

ohne / none	169,00 €
ON-OFF	189,00 €

ohne / none	179,00 €
ON-OFF	199,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-C3A2 & VANF-C4A2 & VANF-C5A2

360° Circular Neon Strip Lighting

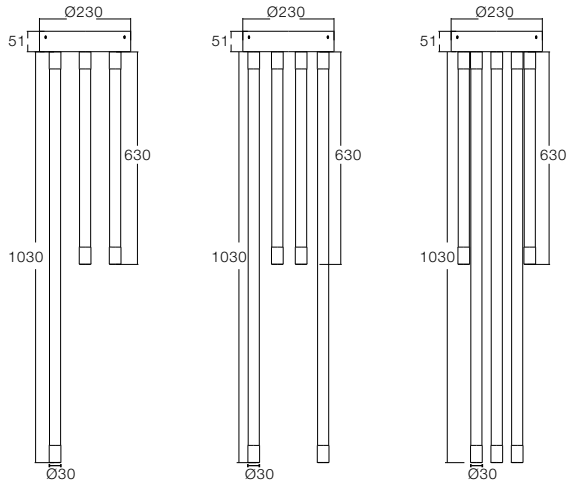

VANF-C3A2 VANF-C4A2 VANF-C5A2

32W 46W 61W | CRI90 | 3000K 4000K | 360° | IP 65 | CB CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
32 W	34 W	24 VDC	90	3000K	360°	2150lm	White	VANF-C3A2-32W-930-WN	VANF-C3A2-930C632F-WN
							Black	VANF-C3A2-32W-930-BN	VANF-C3A2-930C632F-BN
							Chrome	VANF-C3A2-32W-930-CN	VANF-C3A2-930C632F-CN
							Gold	VANF-C3A2-32W-930-GN	VANF-C3A2-930C632F-GN
				4000K	360°	2350lm	White	VANF-C3A2-32W-940-WN	VANF-C3A2-940C632F-WN
							Black	VANF-C3A2-32W-940-BN	VANF-C3A2-940C632F-BN
							Chrome	VANF-C3A2-32W-940-CN	VANF-C3A2-940C632F-CN
							Gold	VANF-C3A2-32W-940-GN	VANF-C3A2-940C632F-GN
46 W	48 W	24 VDC	90	3000K	360°	3200lm	White	VANF-C4A2-46W-930-WN	VANF-C4A2-930C646F-WN
							Black	VANF-C4A2-46W-930-BN	VANF-C4A2-930C646F-BN
							Chrome	VANF-C4A2-46W-930-CN	VANF-C4A2-930C646F-CN
							Gold	VANF-C4A2-46W-930-GN	VANF-C4A2-930C646F-GN
				4000K	360°	3500lm	White	VANF-C4A2-46W-940-WN	VANF-C4A2-940C646F-WN
							Black	VANF-C4A2-46W-940-BN	VANF-C4A2-940C646F-BN
							Chrome	VANF-C4A2-46W-940-CN	VANF-C4A2-940C646F-CN
							Gold	VANF-C4A2-46W-940-GN	VANF-C4A2-940C646F-GN
61 W	64 W	24 VDC	90	3000K	360°	4200lm	White	VANF-C5A2-61W-930-WN	VANF-C5A2-930C661F-WN
							Black	VANF-C5A2-61W-930-BN	VANF-C5A2-930C661F-BN
							Chrome	VANF-C5A2-61W-930-CN	VANF-C5A2-930C661F-CN
							Gold	VANF-C5A2-61W-930-GN	VANF-C5A2-930C661F-GN
				4000K	360°	4600lm	White	VANF-C5A2-61W-940-WN	VANF-C5A2-940C661F-WN
							Black	VANF-C5A2-61W-940-BN	VANF-C5A2-940C661F-BN
							Chrome	VANF-C5A2-61W-940-CN	VANF-C5A2-940C661F-CN
							Gold	VANF-C5A2-61W-940-GN	VANF-C5A2-940C661F-GN

ohne / none	549,00 €
ON-OFF	599,00 €

ohne / none	709,00 €
ON-OFF	799,00 €

ohne / none	869,00 €
ON-OFF	949,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-C3A1 & VANF-C4A1 & VANF-C5A1 & VANF-C7A1

360° Circular Neon Strip Lighting











52W 87W 113W 156W | CRI90 | 3000K 4000K | 360° | IP 65 | CB | CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
52 W	54 W	24 VDC	90	3000K	360°	3600lm	White	VANF-C3A1-52W-930-WN	VANF-C3A1-930C652F-WN
							Black	VANF-C3A1-52W-930-BN	VANF-C3A1-930C652F-BN
ohne / none	639,00 €						Chrome	VANF-C3A1-52W-930-CN	VANF-C3A1-930C652F-CN
							Gold	VANF-C3A1-52W-930-GN	VANF-C3A1-930C652F-GN
ON-OFF	689,00 €			4000K	360°	3900lm	White	VANF-C3A1-52W-940-WN	VANF-C3A1-940C652F-WN
							Black	VANF-C3A1-52W-940-BN	VANF-C3A1-940C652F-BN
							Chrome	VANF-C3A1-52W-940-CN	VANF-C3A1-940C652F-CN
							Gold	VANF-C3A1-52W-940-GN	VANF-C3A1-940C652F-GN
87 W	90 W	24 VDC	90	3000K	360°	6000lm	White	VANF-C4A1-87W-930-WN	VANF-C4A1-930C687F-WN
							Black	VANF-C4A1-87W-930-BN	VANF-C4A1-930C687F-BN
ohne / none	939,00 €						Chrome	VANF-C4A1-87W-930-CN	VANF-C4A1-930C687F-CN
							Gold	VANF-C4A1-87W-930-GN	VANF-C4A1-930C687F-GN
ON-OFF	1029,00 €			4000K	360°	6500lm	White	VANF-C4A1-87W-940-WN	VANF-C4A1-940C687F-WN
							Black	VANF-C4A1-87W-940-BN	VANF-C4A1-940C687F-BN
							Chrome	VANF-C4A1-87W-940-CN	VANF-C4A1-940C687F-CN
							Gold	VANF-C4A1-87W-940-GN	VANF-C4A1-940C687F-GN
113 W	116 W	24 VDC	90	3000K	360°	7800lm	White	VANF-C5A1-113W-930-WN	VANF-C5A1-930C6A1F-WN
							Black	VANF-C5A1-113W-930-BN	VANF-C5A1-930C6A1F-BN
ohne / none	1199,00 €						Chrome	VANF-C5A1-113W-930-CN	VANF-C5A1-930C6A1F-CN
							Gold	VANF-C5A1-113W-930-GN	VANF-C5A1-930C6A1F-GN
ON-OFF	1289,00 €			4000K	360°	8500lm	White	VANF-C5A1-113W-940-WN	VANF-C5A1-940C6A1F-WN
							Black	VANF-C5A1-113W-940-BN	VANF-C5A1-940C6A1F-BN
							Chrome	VANF-C5A1-113W-940-CN	VANF-C5A1-940C6A1F-CN
							Gold	VANF-C5A1-113W-940-GN	VANF-C5A1-940C6A1F-GN
156 W	160 W	24 VDC	90	3000K	360°	11000lm	White	VANF-C7A1-156W-930-WN	VANF-C7A1-930C6A6F-WN
							Black	VANF-C7A1-156W-930-BN	VANF-C7A1-930C6A6F-BN
ohne / none	1629,00 €						Chrome	VANF-C7A1-156W-930-CN	VANF-C7A1-930C6A6F-CN
							Gold	VANF-C7A1-156W-930-GN	VANF-C7A1-930C6A6F-GN
ON-OFF	1809,00 €			4000K	360°	12000lm	White	VANF-C7A1-156W-940-WN	VANF-C7A1-940C6A6F-WN
							Black	VANF-C7A1-156W-940-BN	VANF-C7A1-940C6A6F-BN
							Chrome	VANF-C7A1-156W-940-CN	VANF-C7A1-940C6A6F-CN
							Gold	VANF-C7A1-156W-940-GN	VANF-C7A1-940C6A6F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-SH50-SP

360° Circular Neon Strip Lighting

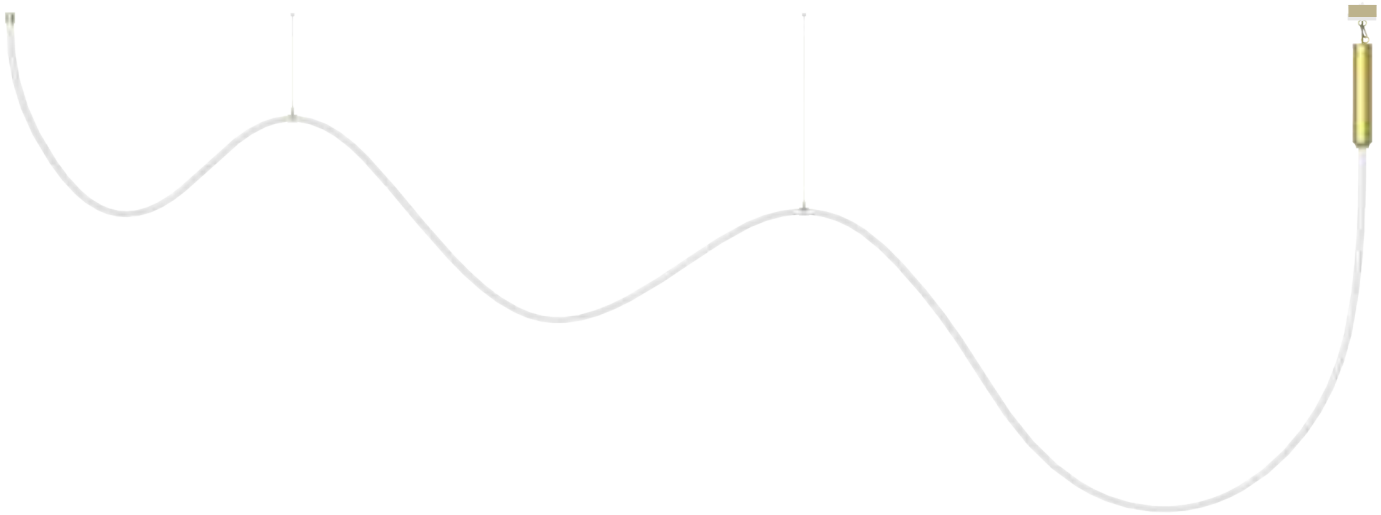

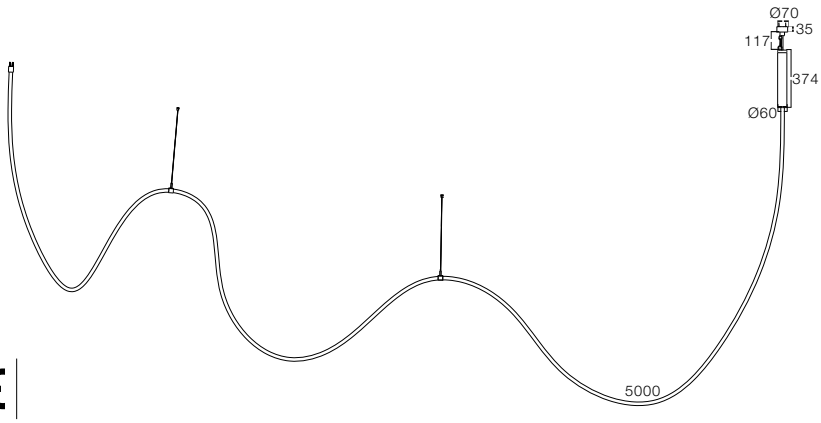

73W | CRI90 | 3000K 4000K | 360° | IP 65 | 3 YEAR GUARANTEE | CB | CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-SH50-SP-73W-930-WN	VANF-SH50-SP-930C673F-WN
							Black	VANF-SH50-SP-73W-930-BN	VANF-SH50-SP-930C673F-BN
							Chrome	VANF-SH50-SP-73W-930-CN	VANF-SH50-SP-930C673F-CN
							Gold	VANF-SH50-SP-73W-930-GN	VANF-SH50-SP-930C673F-GN
				4000K	360°	5500lm	White	VANF-SH50-SP-73W-940-WN	VANF-SH50-SP-940C673F-WN
							Black	VANF-SH50-SP-73W-940-BN	VANF-SH50-SP-940C673F-BN
							Chrome	VANF-SH50-SP-73W-940-CN	VANF-SH50-SP-940C673F-CN
							Gold	VANF-SH50-SP-73W-940-GN	VANF-SH50-SP-940C673F-GN

ON-OFF	779,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-C1B

360° Circular Neon Strip Lighting

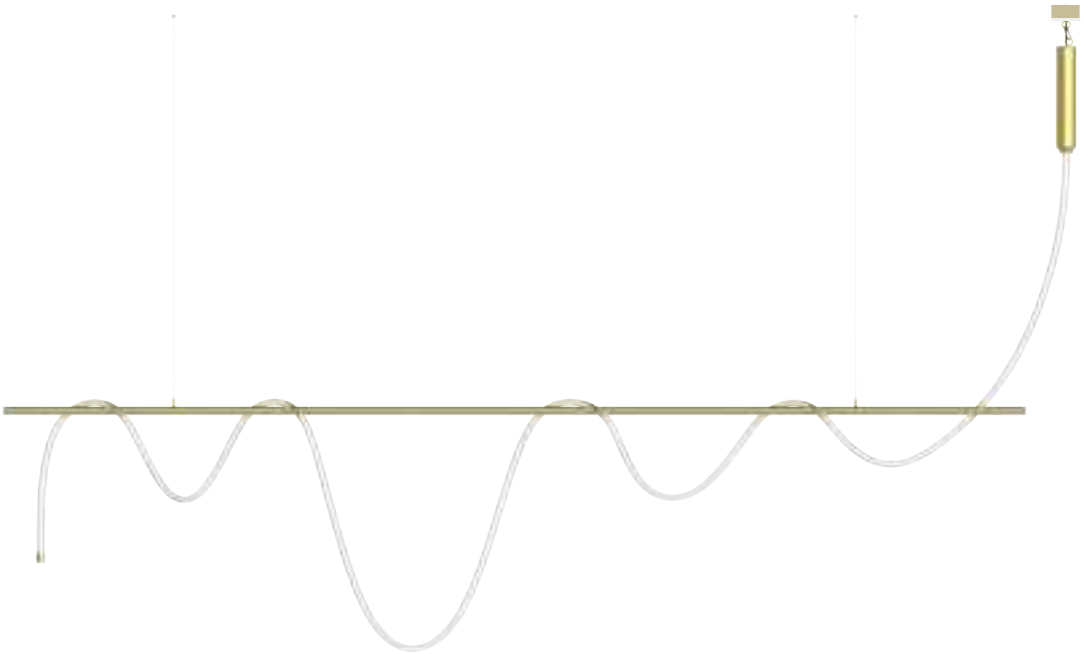

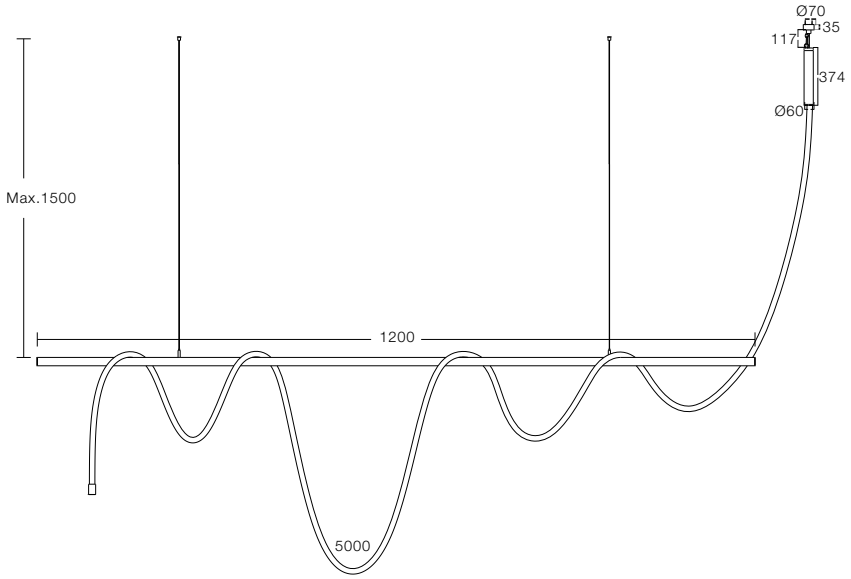

73W | CRI90 | 3000K 4000K | 360° | IP 65 | CB | CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-C1B-73W-930-WN	VANF-C1B-930C673F-WN
							Black	VANF-C1B-73W-930-BN	VANF-C1B-930C673F-BN
							Chrome	VANF-C1B-73W-930-CN	VANF-C1B-930C673F-CN
ON-OFF	839,00 €						Gold	VANF-C1B-73W-930-GN	VANF-C1B-930C673F-GN
				4000K	360°	5500lm	White	VANF-C1B-73W-940-WN	VANF-C1B-940C673F-WN
							Black	VANF-C1B-73W-940-BN	VANF-C1B-940C673F-BN
							Chrome	VANF-C1B-73W-940-CN	VANF-C1B-940C673F-CN
							Gold	VANF-C1B-73W-940-GN	VANF-C1B-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-SH50-SM & VANF-SH50-SUS

360° Circular Neon Strip Lighting

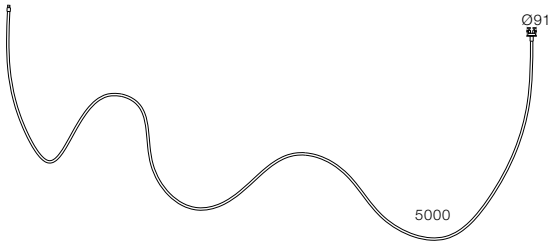

VANF-SH50-SM

73W | CRI90 | 3000K 4000K | 360° | IP65 | CB | CE | 75

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-SH50-SM-73W-930-WN	VANF-SH50-SM-930C673F-WN
							Black	VANF-SH50-SM-73W-930-BN	VANF-SH50-SM-930C673F-BN
							Chrome	VANF-SH50-SM-73W-930-CN	VANF-SH50-SM-930C673F-CN
							Gold	VANF-SH50-SM-73W-930-GN	VANF-SH50-SM-930C673F-GN
				4000K	360°	5500lm	White	VANF-SH50-SM-73W-940-WN	VANF-SH50-SM-940C673F-WN
							Black	VANF-SH50-SM-73W-940-BN	VANF-SH50-SM-940C673F-BN
							Chrome	VANF-SH50-SM-73W-940-CN	VANF-SH50-SM-940C673F-CN
							Gold	VANF-SH50-SM-73W-940-GN	VANF-SH50-SM-940C673F-GN

ohne / none	709,00 €
ON-OFF	759,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF)

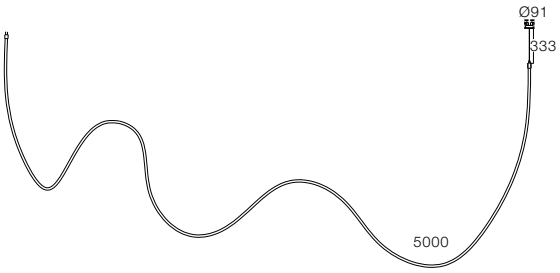

VANF-SH50-SUS

73W | CRI90 | 3000K 4000K | 360° | IP65 | CB | CE | 75

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-SH50-SUS-73W-930-WN	VANF-SH50-SUS-930C673F-WN
							Black	VANF-SH50-SUS-73W-930-BN	VANF-SH50-SUS-930C673F-BN
							Chrome	VANF-SH50-SUS-73W-930-CN	VANF-SH50-SUS-930C673F-CN
							Gold	VANF-SH50-SUS-73W-930-GN	VANF-SH50-SUS-930C673F-GN
				4000K	360°	5500lm	White	VANF-SH50-SUS-73W-940-WN	VANF-SH50-SUS-940C673F-WN
							Black	VANF-SH50-SUS-73W-940-BN	VANF-SH50-SUS-940C673F-BN
							Chrome	VANF-SH50-SUS-73W-940-CN	VANF-SH50-SUS-940C673F-CN
							Gold	VANF-SH50-SUS-73W-940-GN	VANF-SH50-SUS-940C673F-GN

ohne / none	719,00 €
ON-OFF	769,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-SH12-SUS
360° Circular Neon Strip Lighting

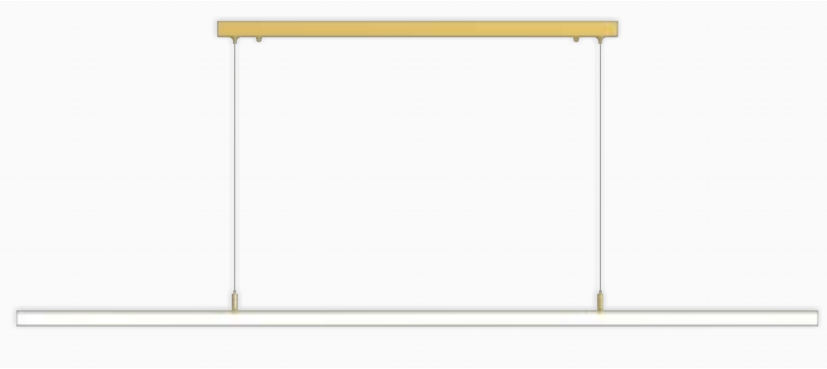

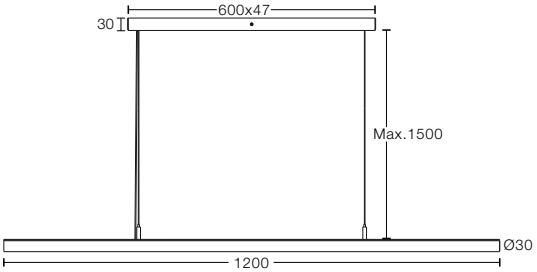

17W | CRI90 | 3000K 4000K | 360° | IP65 | CB | CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
17 W	19 W	24 VDC	90	3000K	360°	1150lm	White	VANF-SH12-SUS-17W-930-WN	VANF-SH12-SUS-930C617F-WN
							Black	VANF-SH12-SUS-17W-930-BN	VANF-SH12-SUS-930C617F-BN
							Chrome	VANF-SH12-SUS-17W-930-CN	VANF-SH12-SUS-930C617F-CN
							Gold	VANF-SH12-SUS-17W-930-GN	VANF-SH12-SUS-930C617F-GN
				4000K	360°	1250lm	White	VANF-SH12-SUS-17W-940-WN	VANF-SH12-SUS-940C617F-WN
							Black	VANF-SH12-SUS-17W-940-BN	VANF-SH12-SUS-940C617F-BN
							Chrome	VANF-SH12-SUS-17W-940-CN	VANF-SH12-SUS-940C617F-CN
							Gold	VANF-SH12-SUS-17W-940-GN	VANF-SH12-SUS-940C617F-GN

ohne / none	359,00 €
ON-OFF	409,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO / VANILLA / VANF-SH06-SM
360° Circular Neon Strip Lighting

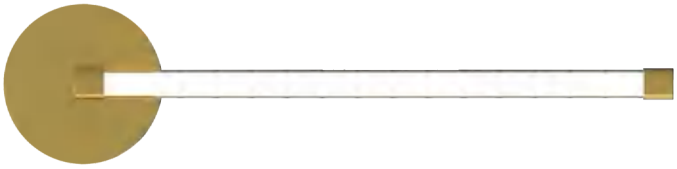



9W | CRI90 | 3000K 4000K | 360° | IP65 | CB | CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
9 W	11 W	24 VDC	90	3000K	360°	600lm	White	VANF-SH06-SM-9W-930-WN	VANF-SH06-SM-930C609F-WN
							Black	VANF-SH06-SM-9W-930-BN	VANF-SH06-SM-930C609F-BN
							Chrome	VANF-SH06-SM-9W-930-CN	VANF-SH06-SM-930C609F-CN
							Gold	VANF-SH06-SM-9W-930-GN	VANF-SH06-SM-930C609F-GN
				4000K	360°	650lm	White	VANF-SH06-SM-9W-940-WN	VANF-SH06-SM-940C609F-WN
							Black	VANF-SH06-SM-9W-940-BN	VANF-SH06-SM-940C609F-BN
							Chrome	VANF-SH06-SM-9W-940-CN	VANF-SH06-SM-940C609F-CN
							Gold	VANF-SH06-SM-9W-940-GN	VANF-SH06-SM-940C609F-GN

ohne / none	149,00 €
ON-OFF	169,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF)

NEKO OUTDOOR

NEKO / SEAPOINT
Exterior LED Downlight

6W | CRI80 | 3000K | 25° | IP67 | Ik07 | CREE 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: Black



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	25°	450lm	SEAPOINT-830-25°	SEAP-8302506F-BN

Remark: With internal Non-Dimmable LED driver

ON-OFF	189,00 €

NEKO / LAKEPOINT Fixed
Exterior LED Downlight

8W | CRI80 | 3000K | 30° | IP65 | CREE 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: White/Black



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPF-8W-830-30°	LAPF-8303008F-WW

Remark: With internal Non-Dimmable LED driver



6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPF-8W-830-30°	LAPF-8303008F-BB

Remark: With internal Non-Dimmable LED driver

ON-OFF	109,00 €

NEKO / LAKEPOINT Adjustable
Exterior LED Downlight

8W | CRI80 | 3000K | 30° | IP65 | ±30° Tiltable | CREE 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: White/Black



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPA-8W-830-30°	LAPA-8303008F-WW

Remark: With internal Non-Dimmable LED driver

6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPA-8W-830-30°	LAPA-8303008F-BB

Remark: With internal Non-Dimmable LED driver

ON-OFF	139,00 €

NEKO / SKYSURFER
IP65 LED Ceiling Light

10W | CRI90 | 3000K | 36° | UGR < 19 | IP65 | CITIZEN 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: Black



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8 W	10 W	220-240 VAC	90	3000K	36°	850lm	SSRC-10W-930-36°	SSRC-9303610F-BN

Remark: With internal Non-Dimmable LED driver

ON-OFF	119,00 €

NEKO / CARMEL
LED Ceiling Light

6W | CRI80 | 3000K | 55° | IP54 | IK07 | CREE 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: Dark-Grey



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	55°	500lm	CARMEL R-830-55°	CARR-8305506F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	129,00 €

5 W	6 W	220-240 VAC	80	3000K	55°	500lm	CARMEL S-830-55°	CARS-8305506F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	129,00 €

NEKO / CLIFTON
LED Ceiling Light

25W | CRI80 | 3000K | 110° | IP54 | Ik10 | EDISON 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: Dark-Grey



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
22 W	25 W	220-240 VAC	80	3000K	110°	2350lm	CLIFTON-830-110°	CLIF-830A125F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	259,00 €

NEKO / RIVA Round
LED Ceiling Light



14W | CRI80 | 3000K | 110° | IP54 | PHILIPS 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	110°	1150lm	RIVR-14W-830-110°	RIVR-830A114F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	209,00 €

NEKO / RIVA Square
LED Ceiling Light



14W | CRI80 | 3000K | 110° | IP54 | PHILIPS 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	110°	1150lm	RIVS-14W-830-110°	RIVS-830A114F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	209,00 €

NEKO / CAMPSBAY
LED Wall Light



6W 12W | CRI80 | 3000K | 45° | IP65 | IK07 | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey

CAMPSBAY Single

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	45°	500lm	CAMPSBAY Single-830-45°	CAMS-8304506F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	139,00 €

CAMPSBAY Double

10 W	12 W	220-240 VAC	80	3000K	45°	1000lm	CAMPSBAY Double-830-45°	CAMD-8304512F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	159,00 €

NEKO / LAGOON
LED Wall Light



11W | CRI80 | 3000K | 100° | IP65 | IK07 | CREE 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: Dark-Grey

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9 W	11 W	220-240 VAC	80	3000K	100°	950lm	LAGOON-830-100°	LAG-830A011F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 189,00 €

NEKO / CRUZ D
LED Wall Light



14W | CRI80 | 3000K | 120° | IP65 | OSRAM 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: Dark-Grey

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	120°	1400lm	RCRUD-830-120°	CRUD-830A214F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 119,00 €

NEKO / CAPRI
LED Wall Light



16W | CRI80 | 3000K | 100° | IP65 | CREE 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: Dark-Grey

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
14 W	16 W	220-240 VAC	80	3000K	100°	1300lm	CAPI-830-100°	CAPI-830A016F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 169,00 €

NEKO / BAY
LED Wall Light



6W | CRI80 | 3000K | 90° | IP65 | IK07 | CREE 50,000h@L80B10 | CE | 3 YEARS | Body: Aluminum Color: Dark-Grey

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	90°	430lm	BAY-830-90°	BAY-8309006F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 129,00 €

NEKO / ASCONA
LED Wall Light



10W | CRI80 | 3000K | 110° | IP65 | IK10 | EDISON 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8 W	10 W	220-240 VAC	80	3000K	110°	630lm	ASCONA-830-110°	ASCO-830A110F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	159,00 €

NEKO / NICE 250
LED Wall Light



7W 14W | CRI80 | 3000K | 110° | IP65 | PHILIPS 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



NICE 250 Single

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	7 W	220-240 VAC	80	3000K	110°	650lm	NICE 250S-830-110°	N25S-830A107F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	169,00 €



NICE 250 Double

12 W	14 W	220-240 VAC	80	3000K	110°	1300lm	NICE 250D-830-110°	N25D-830A114F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	199,00 €

NEKO / NICE 500
LED Wall Light



14W 20W | CRI80 | 3000K | 110° | IP65 | PHILIPS 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey

NICE 500 Single

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	110°	1300lm	NICE 500S-830-110°	N50S-830A114F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	239,00 €

NICE 500 Double

18 W	20 W	220-240 VAC	80	3000K	110°	1800lm	NICE 500D-830-110°	N50D-830A120F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	279,00 €

NEKO / ST. TROPEZ

6W	CRI80	3000K	3°	IP65	IK10	CREE 50,000h@L80B10	CE	3	Body: Aluminum Color: Dark-Grey





LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4 W	6 W	220-240 VAC	80	3000K	3°	300lm	St.Tropez-830-3°	STTZ-8300306F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	229,00 €

NEKO / CAPETOWN Recessed
Recessed LED Step Light

4.5W	CRI80	3000K	65°	IP65	IK07	EDISON 50,000h@L80B10	CE	3	Body: Aluminum Color: Dark-Grey



Round-Mounting Box



Square-Mounting Box


Capetown Round-Recessed

LED Power	System Power	Input	Cutout	CRI	CCT	Beam	System Output	Model	Code
3 W	4.5 W	220-240 VAC	Ø110*55	80	3000K	65°	155lm	Capetown RR-830-65°	CTRR-8306505F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	119,00 €

Capetown Square-Recessed

3 W	4.5 W	220-240 VAC	110*110*55	80	3000K	65°	165lm	Capetown SR-830-65°	CTSR-8306505F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	119,00 €

NEKO / CAPETOWN Surface
LED Step Light

4.5W	CRI80	3000K	65°	IP65	IK07	EDISON 50,000h@L80B10	CE	3	Body: Aluminum Color: Dark-Grey



Capetown Round-Surface



Capetown Square-Surface

Capetown Round-Surface

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3 W	4.5 W	220-240 VAC	80	3000K	65°	150lm	Capetown RS-830-65°	CTRS-8306505F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	79,00 €


Capetown Square-Surface

3 W	4.5 W	220-240 VAC	80	3000K	65°	170lm	Capetown SS-830-65°	CTSS-8306505F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	79,00 €

NEKO / DURBAN
LED Bollard Lamp

6W | CRI80 | 3000K | IP65 | IK07 | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K		450lm	DURBAN-830	DURB-830B706F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	319,00 €

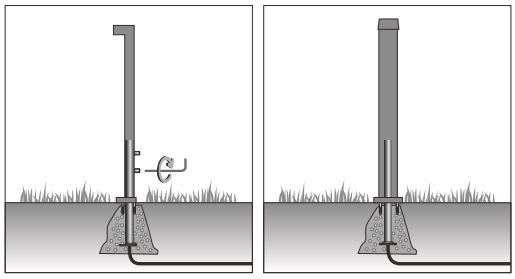

Anchorage installation

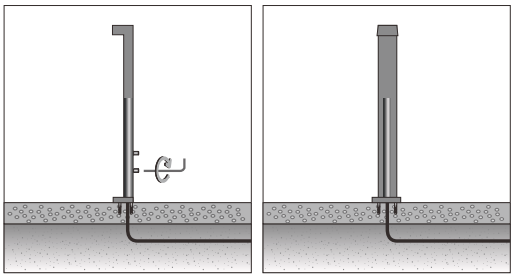

Surface installation



NEKO / POSITANO
LED Bollard Lamp



7W | CRI80 | 3000K | 50° | IP65 | PHILIPS 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey

POSITANO 300

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	7 W	220-240 VAC	80	3000K	50°	200lm	PTO3-830-50°	PTO3-8305007F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	289,00 €

POSITANO 600

5 W	7 W	220-240 VAC	80	3000K	50°	200lm	PTO6-830-50°	PTO6-8305007F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	369,00 €

NEKO / PORTOFINO
Projector Light

4W 11W 13W | CRI80 | 3000K | 20° 35° | IP65 | IK07 | CREE 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey

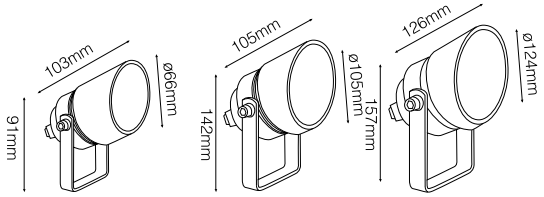

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3 W	4 W	220-240 VAC	80	3000K	35°	250lm	PORTOFINO S-830-35°	PORS-8303504F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 139,00 €

Cable in 1.5 meters

9 W	11 W	220-240 VAC	80	3000K	20°	900lm	PORTOFINO M-830-20°	PORM-8302011F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 209,00 €

Cable in 1.5 meters

11 W	13 W	220-240 VAC	80	3000K	20°	1050lm	PORTOFINO L-830-20°	PORL-8302013F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 259,00 €

Cable in 1.5 meters

NEKO / PORTOFINO Adjustable
Projector Light



11W | CRI80 | 3000K | 15°-60° Zooming | IP65 | IK07 | EDISON 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9 W	11 W	220-240 VAC	80	3000K	15°-60°	Max.450lm	PORTOFINO A-830-Z	PORA-830ZM11F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 249,00 €

NEKO / AFTER7 Mini
Projector Light

5.5W	CRI80	3000K	30° 45°	IP67	IK10	CITIZEN 50,000h@L80B10	CE	Body: Aluminum Color: Dark-Grey

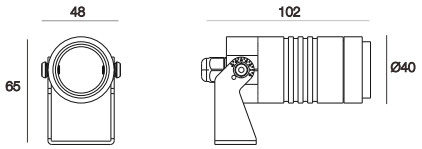

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	AFTER7 Mini-830-30°	AFMI-8303006-DN
				3000K	45°	500lm	AFTER7 Mini-830-45°	AFMI-8304506-DN

Remark: External 24VDC LED driver is required (Non-Dimmable)

ohne / none	159,00 €
ON-OFF (IP67)	199,00 €

3 meter cable and installation stake included

5 W	5.5 W	24 V	80	3000K	30°	500lm	AFTER7 Mini-830-30°-H	AFMI-8303006-DN-H
				3000K	45°	500lm	AFTER7 Mini-830-45°-H	AFMI-8304506-DN-H

Remark: External 24VDC LED driver is required (Non-Dimmable)

ohne / none	179,00 €
ON-OFF (IP67)	219,00 €

3 meter cable and installation stake included

NEKO / AFTER7 Maxi
Projector Light

10W	CRI80	3000K	20° 30° 50°	IP67	IK10	CITIZEN 50,000h@L80B10	CE	Body: Aluminum Color: Dark-Grey

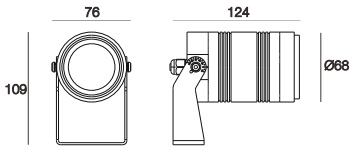

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	AFTER7 Maxi-830-20°	AFMA-8302010-DN
				3000K	30°	850lm	AFTER7 Maxi-830-30°	AFMA-8303010-DN
				3000K	50°	850lm	AFTER7 Maxi-830-50°	AFMA-8305010-DN

Remark: External 24VDC LED driver is required (Non-Dimmable)

ohne / none	329,00 €
ON-OFF (IP67)	369,00 €

3 meter cable and installation stake included

9 W	10 W	24 V	80	3000K	20°	850lm	AFTER7 Maxi-830-20°-H	AFMA-8302010-DN-H
				3000K	30°	850lm	AFTER7 Maxi-830-30°-H	AFMA-8303010-DN-H
				3000K	50°	850lm	AFTER7 Maxi-830-50°-H	AFMA-8305010-DN-H

Remark: External 24VDC LED driver is required (Non-Dimmable)

ohne / none	349,00 €
ON-OFF (IP67)	389,00 €

3 meter cable and installation stake included

NEKO / TERARACE Micro

Recessed Ground Light

1.5W	CRI80	3000K	18° 40° 65°	IP68	IK10	OSRAM 50,000h@L80B10	CE	Top Cover: Stainless Steel Body: Aluminum Color: Dark-Grey



LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1 W	1.5 W	24 V	80	3000K	18°	100lm	TERARACE Micro-830-18°	TEMI-8301802F-DN
				3000K	40°	100lm	TERARACE Micro-830-40°	TEMI-8304002F-DN
				3000K	65°	100lm	TERARACE Micro-830-65°	TEMI-8306502F-DN

Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube

ohne / none	99,00 €
ON-OFF (IP67)	139,00 €

NEKO / TERARACE Nano

Recessed Ground Light

2W	CRI80	3000K	18° 35° 60°	IP68	IK10	OSRAM 50,000h@L80B10	CE	Top Cover: Stainless Steel Body: Aluminum Color: Dark-Grey



LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1.6 W	2 W	24 V	80	3000K	18°	120lm	TERARACE Nano-830-18°	TENA-8301802F-DN
				3000K	35°	120lm	TERARACE Nano-830-35°	TENA-8301802F-DN
				3000K	60°	120lm	TERARACE Nano-830-60°	TENA-8301802F-DN

Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube

ohne / none	119,00 €
ON-OFF (IP67)	159,00 €

NEKO / TERARACE Mini

Recessed Ground Light



5.5W	CRI80	3000K	30° 45°	IP68	IK10	CITIZEN 50,000h@L80B10	CE	Top Cover: Stainless Steel Body: Aluminum Color: Dark-Grey

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	TERARACE Mini-830-30°	TEMI-8303006F-DN
				3000K	45°	500lm	TERARACE Mini-830-45°	TEMI-8304506F-DN

Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube



ohne / none	159,00 €
ON-OFF (IP67)	199,00 €

NEKO / TERARACE Maxi

Recessed Ground Light



10W	CRI80	3000K	20° 30° 50°	IP68	IK10	CITIZEN 50,000h@L80B10	CE	Top Cover: Stainless Steel Body: Aluminum Color: Dark-Grey

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	TERARACE Maxi-830-20°	TEMA-8302010F-DN
				3000K	30°	850lm	TERARACE Maxi-830-30°	TEMA-8303010F-DN
				3000K	50°	850lm	TERARACE Maxi-830-50°	TEMA-8305010F-DN

Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube



ohne / none	349,00 €
ON-OFF (IP67)	389,00 €

Allgemeine Geschäftsbedingungen

VERKAUFS- UND LIEFERBEDINGUNGEN

Stand: 01. März 2023, Neko Lighting GmbH, Deutschland – nachstehend Lieferant genannt

1 Allgemeines und Anwendung

(1) Diese Verkaufs- und Lieferbedingungen gelten nur gegenüber Unternehmern, juristischen Personen des öffentlichen Rechts und öffentlich-rechtlichen Sondervermögen im Sinne von § 310 Abs. 1 BGB.

(2) Sie gelten ausschließlich. Entgegenstehenden oder von diesen Verkaufs- und Lieferbedingungen abweichenden bzw. diese ergänzenden Bedingungen, insbesondere Einkaufsbedingungen des Bestellers, wird hiermit widersprochen. Abweichungen oder Ergänzungen werden nur anerkannt, wenn der Lieferant diesen ausdrücklich schriftlich zustimmt. Diese Verkaufs- und Lieferbedingungen gelten auch für den Fall, dass der Lieferant eine Lieferung an den Besteller in Kenntnis seiner entgegenstehenden, abweichenden oder zusätzlichen Bedingungen vorbehaltlos ausführt.

(3) Zeichnungen, Kalkulationen, Angebote und andere Unterlagen, die während der Vertragsverhandlung dem Besteller übergeben werden, sind für den Lieferanten urheberrechtlich geschützt; sie verbleiben im Eigentum des Lieferanten und dürfen Dritten nur nach vorheriger Zustimmung zugänglich gemacht werden. Sofern ein Auftrag nicht erteilt wird, sind alle übergebenen Unterlagen auf Verlangen des Lieferanten unverzüglich zurückzugeben.

2 Angebot und Vertragsabschluss

(1) Angaben in Katalogen, Preislisten, Datenblättern, Angeboten und Bestellvorschlägen des Lieferanten sind unverbindlich bzw. nur annähernd maßgebend. Maßgeblich für den Inhalt und Umfang von Lieferungen und Leistungen sind die im Einzelfall vereinbarten und mit der (sofern vom Lieferanten ausgestellt) Auftragsbestätigung bestätigten Angaben und Konditionen. Die Prüfung der Auftragsbestätigung erachtet der Lieferant als obligatorisch und hat daher unverzüglich durch den Besteller zu erfolgen.

(2) Sofern eine Bestellung als Angebot gemäß § 145 BGB anzusehen ist, kann diese vom Lieferanten innerhalb von zwei Wochen angenommen werden. Die Annahme kann schriftlich oder per E-Mail (z.B. durch Auftragsbestätigung des Lieferanten) oder durch Lieferung der Ware an den Besteller gemäß diesen Verkaufs- und Lieferbedingungen erfolgen.

(3) Alle technischen Daten der Kataloge und sonstiger Verkaufsunterlagen, d.h. Listen, Zeichnungen, Leistungs- und Verbrauchsangaben sowie Gewichts- und Maßangaben sind sorgfältig erstellt. Bis zum Vertragsschluss behält sich der Lieferant Änderungen hieran vor, insbesondere bei Irrtümern. Gesetzliche Anfechtungsrechte bleiben auch nach Vertragsschluss unberührt, insbesondere bei offensichtlichen Kalkulationsfehlern.

(4) Mündliche Vereinbarungen, insbesondere Nebenabreden und Zusagen von Vertretern, bedürfen der schriftlichen Bestätigung des Lieferanten.

3 Datenschutz

Die Daten des Bestellers werden unter Beachtung der gesetzlichen Vorschriften vom Lieferanten gespeichert und verarbeitet. Im Bedarfsfall werdender Lieferant und der Besteller weitergehende Vereinbarungen hinsichtlich der Übermittlung und Verarbeitung personenbezogener Daten abschließen.

4 Preise und Zahlung

(1) Sofern nicht etwas anderes ausdrücklich vereinbart ist, gelten die zum Zeitpunkt des Vertragsschlusses aktuellen Preise des Lieferanten. Die Preise gelten ab Werk oder Lager des Lieferanten einschließlich handelsüblicher Verpackung jedoch ausschließlich Fracht und Versicherung, sofern nicht etwas anderes ausdrücklich vereinbart ist. Umsatzsteuer in der jeweils gesetzlichen Höhe ist hinzuzurechnen.

(2) Sofern nichts anderes vereinbart wurde, ist der Kaufpreis gemäß den in der Auftragsbestätigung angegebenen Zahlungsbedingungen zu entrichten. Die Zahlung des Kaufpreises hat ausschließlich auf das vom Lieferanten, etwa in der Auftragsbestätigung, benannte Konto zu erfolgen.

(3) Die Nichteinhaltung einer Zahlungsfrist oder Umstände, welche die Kreditwürdigkeit des Bestellers zu mindern geeignet sind und eine Gefährdung des Anspruchs auf den Kaufpreis durch mangelnde Leistungsfähigkeit erkennen lassen (z.B. Antrag auf Eröffnung des Insolvenzverfahrens), haben die sofortige Fälligkeit aller Forderungen des Lieferanten zur Folge. Darüber hinaus ist der Lieferant in den vorgenannten Fällen geminderter Kreditwürdigkeit und Gefährdung des Anspruchs auf den Kaufpreis berechtigt, für noch ausstehende Lieferungen Vorauszahlung durch den Besteller zu verlangen sowie nach angemessener Nachfrist vom Vertrag zurückzutreten oder Schadensersatz wegen Nichterfüllung zu verlangen.

(4) Die Zurückbehaltung von Zahlungen und die Aufrechnung mit einer vom Lieferanten bestrittenen und nicht rechtskräftig festgestellten Gegenforderung des Bestellers sind ausgeschlossen. Die Gegenrechte des Bestellers bei Mängeln der Lieferung, insbesondere solche aus §9 Ziffer (6) bleiben unberührt.

5 Liefer- und Abnahmefrist

(1) Die Lieferfrist wird individuell vereinbart oder vom Lieferanten bei der Annahme der Bestellung angegeben. Die Lieferfrist berechnet sich abhängig von dem Eingang aller für die Ausführung des Vertrages erforderlichen Unterlagen (z.B. schriftliche Freigabe technischer Zeichnungen, Abklärung aller technischen Fragen, Genehmigungen etc.) beim Lieferanten sowie dem Erhalt einer ggf. vereinbarten Anzahlung. Ist eine Lieferfrist weder individuell vereinbart noch bei der Annahme der Bestellung angegeben worden und hat der Lieferant einen Liefertermin vielmehr unverbindlich in Aussicht gestellt, gilt dieser in Aussicht gestellte Termin nur annähernd.

(2) Sofern der Lieferant, etwa aufgrund von Ereignissen höherer Gewalt oder sonstigen Umständen, die er nicht zu vertreten hat, einen verbindlichen Liefertermin nicht einhalten kann (Nichtverfügbarkeit der Leistung), wird er den Besteller hierüber unverzüglich informieren und zugleich den voraussichtlichen, neuen Liefertermin mitteilen. Ist die Leistung auch innerhalb der neuen Lieferfrist nicht verfügbar, ist der Lieferant berechtigt, ganz oder teilweise vom Vertrag zurückzutreten. Eine bereits vom Besteller erbrachte Gegenleistung wird unverzüglich erstattet. Als Fall der Nichtverfügbarkeit der Leistung gilt insbesondere auch eine nicht rechtzeitige Selbstbelieferung durch einen Zulieferer des Lieferanten, wenn weder den Lieferanten noch den Zulieferer ein Verschulden trifft oder wenn der Lieferant im Einzelfall nicht zur Beschaffung verpflichtet ist.

(3) Hält der Lieferant einen Liefertermin nicht ein, ist der Besteller berechtigt, dem Lieferanten eine angemessene Nachfrist zu setzen und für den Fall, dass diese erfolglos verstreicht, vom Vertrag zurückzutreten. Als angemessene Nachfrist gilt bei Standardprodukten eine Frist von vier Wochen, bei Sonderanfertigungen eine Frist von sechs Wochen.

(4) Ist die Lieferung auch nach schriftlich erfolgter Inverzugsetzung und Ablauf einer ebenfalls schriftlich gesetzten angemessenen Nachfrist durch den Lieferanten nicht ausgeführt worden, so ist der Besteller – sofern er glaubhaft macht, dass ihm hieraus ein Schaden entstanden ist – unter Ausschluss weiterer Schadensersatzansprüche im Hinblick auf den Verzug berechtigt, einen pauschalierten Ersatz seines Verzugsschadens zu fordern. Der pauschalierte Er-

satz beträgt höchstens 0,5% für jede vollendete Woche des Verzuges, insgesamt jedoch höchstens 5% des Preises für die von dem Verzug betroffene Lieferung oder Leistung. Vorausgesetzt wird, dass der Lieferverzug nicht auf Vorsatz oder grober Fahrlässigkeit des Lieferanten, eines gesetzlichen Vertreters oder Erfüllungsgehilfen des Lieferanten beruht.

(5) Teillieferungen sind in zumutbarem Umfang zulässig.

6 Lieferung, Verpackung, Gefahrenübergang, Entsorgung und Produktrücknahme

(1) Alle Waren werden gemäß der vereinbarten Incoterm-Klausel der Incoterms geliefert, bzw. in Abwesenheit einer solchen Vereinbarung zwischen den Parteien, gemäß der in der Auftragsbestätigung des Lieferanten genannten Incoterm-Klausel der Incoterms.

(2) Soweit nicht etwas anderes vereinbart ist, geht die Gefahr des zufälligen Untergangs und der zufälligen Verschlechterung der Ware mit der Übergabe auf den Besteller über. Auf Verlangen und Kosten des Bestellers wird die Ware an einen anderen Bestimmungsort versandt (Versendungskauf). Beim Versendungskauf geht die Gefahr, soweit nicht anders vereinbart, mit Übergabe der Ware an den Spediteur, den Frachtführer oder die sonst zur Ausführung der Versendung bestimmten Person oder Anstalt auf den Besteller über. Der Übergabe an den Besteller steht es gleich, wenn der Besteller im Verzug der Annahme ist.

(3) Die Versandpauschalen sind der jeweils aktuellen Preisliste sowie der Auftragsbestätigung zu entnehmen.

(4) Alle Lieferungen erfolgen standardmäßig entladebereit ohne Hebebühne, es sei denn etwas anderes ist ausdrücklich vereinbart.

(5) Der Besteller darf die Entgegennahme von Lieferungen und Leistungen wegen unerheblicher Mängel nicht verweigern.

(6) Der Lieferant wählt Verpackung und Versandart nach bestem Ermessen.

(7) Die Erfüllung der dem Hersteller gesetzlich auferlegten Entsorgungsverpflichtung für in den Verkehr gebrachte Leuchten werden eingehalten. Die WEEE-Registrierungsnummer lautet: DE 83165656

7 Eigentumsvorbehalt

(1) Die gelieferte Ware bleibt im Eigentum des Lieferanten bis zur Erfüllung sämtlicher dem Lieferanten gegenwärtig und zukünftig gegenüber dem Besteller zustehender Ansprüche. Bei laufender Rechnung gilt das vorbehaltende Eigentum an den Lieferungen (Vorbehaltsware) als Sicherung für die Saldorechnung des Lieferanten.

(2) Eine Be- und Verarbeitung der Vorbehaltsware durch den Besteller erfolgt stets für den Lieferanten. Wird die Vorbehaltsware mit anderen Sachen verarbeitet, die nicht dem Lieferanten gehören, so erwirbt der Lieferant Miteigentum an der neuen Sache im Verhältnis des Rechnungswertes der Vorbehaltsware zu den anderen verarbeiteten Sachen im Zeitpunkt der Verarbeitung. Im Übrigen gilt für die durch Verarbeitung entstehende neue Sache das Gleiche wie für die Vorbehaltsware.

(3) Verarbeitet der Besteller die Vorbehaltsware durch Verbindung und/oder Vermischung mit anderen, dem Lieferanten nicht gehörenden Waren, so erwirbt der Lieferant Miteigentum an der neuen Sache im Verhältnis des Rechnungswertes der Vorbehaltsware zu den anderen verbundenen oder vermischten Sachen im Zeitpunkt der Verbindung oder Vermischung. Wird die Vorbehaltsware in der Weise verbunden oder vermischt, dass die Sache des Käufers als Hauptsache anzusehen ist, sind der Besteller und der Lieferant sich bereits jetzt einig, dass der Besteller dem Lieferanten anteilsmäßig Miteigentum an dieser Sache übertr. gt. Der Lieferant nimmt diese Übertragung an.

(4) Die Weiterveräußerung der Vorbehaltsware ist dem Besteller nur im gewöhnlichen Geschäftsbetrieb gestattet. Zu anderen Verfügungen über die Vorbehaltsware, insbesondere Verpfändung und Sicherheitsübereignung, ist der Besteller nicht berechtigt.

(5) Für den Fall der Weiterveräußerung tritt der Besteller hiermit bereits jetzt bis zur Erfüllung sämtlicher Ansprüche des Lieferanten die ihm aus der Weiterveräußerung entstehenden Forderungen und sonstigen Ansprüche gegen seinen Kunden mit sämtlichen Nebenrechten an den Lieferanten ab. Auf Verlangen ist der Besteller verpflichtet, alle Auskünfte zu geben und Unterlagen auszuhändigen, die zur Geltendmachung der Rechte des Lieferanten gegenüber dem Kunden des Bestellers erforderlich sind.

(6) Wird die Vorbehaltsware vom Besteller nach Be- und Verarbeitung gemäß vorstehender Ziffer (2) oder zusammen mit anderen, dem Lieferanten nicht gehörenden Waren weiterveräußert, so gilt die Abtretung der Kaufpreisforderung gemäß Ziffer (5) nur in Höhe des Rechnungswertes der Vorbehaltsware des Lieferanten.

(7) Übersteigt der realisierbare Wert der für den Lieferanten bestehenden Sicherheiten die offenen Gesamtforderungen um mehr als 10 %, so ist der Lieferant auf Verlangen des Bestellers insoweit zur Freigabe von Sicherungen nach Wahl des Lieferanten verpflichtet.

(8) Pfändungen oder Beschlagnahme der Vorbehaltsware sind dem Lieferanten unverzüglich anzuzeigen. Daraus entstehende Interventionskosten gehen, sofern der Dritte diese Kosten dem Lieferanten nicht zu erstatten vermag, zu Lasten des Bestellers.

(9) Bei vertragswidrigem Verhalten des Bestellers, insbesondere bei Nichtzahlung des fälligen Kaufpreises, ist der Lieferant berechtigt, nach den gesetzlichen Vorschriften vom Vertrag zurückzutreten oder/und die Vorbehaltsware auf Grund des Eigentumsvorbehalts heraus zu verlangen. Das Herausgabeverlangen des Lieferanten beinhaltet nicht zugleich die Erklärung des Rücktritts; der Lieferant ist vielmehr berechtigt, lediglich die Ware heraus zu verlangen und sich den Rücktritt vorzubehalten. Zahlt der Besteller den fälligen Kaufpreis nicht, darf der Lieferant diese Rechte nur geltend machen, wenn er dem Besteller zuvor erfolglos eine angemessene Frist zur Zahlung gesetzt hat oder eine derartige Fristsetzung nach den gesetzlichen Vorschriften entbehrlich ist. Falls der Lieferant nach Maßgabe vorstehender Bedingungen von dem Eigentumsvorbehalt durch das Verlangen der Herausgabe der Vorbehaltsware Gebrauch macht, ist der Lieferant berechtigt, die Ware zu verwerten. Der Erlös der Verwertung wird mit denjenigen Beträgen verrechnet, die der Besteller dem Lieferanten schuldet, nachdem ein angemessener Betrag für die Kosten der Verwertung abgezogen wurde. Weitergehende Ansprüche auf Schadensersatz gegen den Besteller, insbesondere wegen entgangenen Gewinns, bleiben vorbehalten.

8 Rücknahme von Ware aus Kulanz

(1) Die Rücksendung mangelfreier Ware im Rahmen der Kulanz des Lieferanten setzt das vorherige schriftliche Einverständnis des Lieferanten voraus, anderenfalls ist dieser berechtigt, die Annahme der Ware zu verweigern.

(2) Die Rücknahme der Ware im Rahmen der Kulanz setzt voraus, dass die Ware sich in Originalverpackung und ordnungsgemäßem Zustand befindet.

(3) Für die Rücknahme der Ware im Rahmen der Kulanz berechnet der Lieferant pauschale Bearbeitungskosten in Höhe von 30% des Warenwerts. Ferner hat der Besteller sämtliche Transportkosten sowie Kosten der Verpackung, Umverpackung und eventuellen Instandsetzung zu tragen.

(4) Eine Rücknahme von Ware im Wege der Kulanz mehr als 60 Tage nach Auslieferung ist grundsätzlich ausgeschlossen.

(5) Bei Sonderanfertigungen ist eine Rücknahme von Ware im Wege der Kulanz grundsätzlich ausgeschlossen, gleiches gilt für vom Besteller beschädigte Ware.

9 Mängelhaftung

(1) Mängelansprüche des Bestellers setzen voraus, dass dieser seinen Untersuchungs- und Rügeobliegenheiten gemäß §§ 377, 381 HGB nachgekommen ist.

(2) Zeigt sich bei der Lieferung, der Untersuchung oder zu irgendeinem späteren Zeitpunkt ein Mangel, so ist dies dem Lieferanten unverzüglich nach Bekanntwerden schriftlich mitzuteilen. In jedem Fall sind offensichtliche Mängel (einschließlich Falsch- oder Minderlieferung) innerhalb von 10 Werktagen ab Lieferung und bei der Untersuchung nicht erkennbare Mängel innerhalb der gleichen Frist von 10 Werktagen ab Entdeckung schriftlich anzuzeigen. Versäumt der Besteller die ordnungsgemäße Untersuchung und/oder die Mängelanzeige, gilt die Ware hinsichtlich des nicht bzw. nicht rechtzeitig oder nicht ordnungsgemäß angezeigten Mangels als genehmigt, weswegen der Besteller insoweit Mängelansprüche in dieser Hinsicht nicht geltend machen kann.

(3) Die vorgenannte Untersuchung hat in jedem Fall einen einfachen Funktionstest sowie eine einfache (Sicht-)Prüfung der äußeren Beschaffenheit der Ware zu enthalten. Wird eine größere Warenmenge geliefert, genügt eine stichprobenartige Untersuchung der Ware, welche repräsentativ ist und der Gesamtmenge gerecht wird und im Rahmen der in vorstehender Ziffer (2) genannten Frist in zumutbarer Weise vorgenommen werden kann.

(4) Stellt der Besteller Mängel der Ware fest, ist er verpflichtet, dem Lieferanten die beanstandete Ware oder Muster davon zwecks Prüfung der Beanstandung zur Verfügung zu stellen und diesem eine Überprüfung der beanstandeten Ware innerhalb einer angemessenen Frist zu gestatten. Im Falle der Verweigerung durch den Besteller ist der Lieferant nicht verpflichtet, sich auf ein Nacherfüllungsverlangen des Bestellers einzulassen.

(5) Bis zum Abschluss der Überprüfung durch den Lieferanten gemäß vorstehender Ziffer (4) darf der Besteller nach Entdeckung des Mangels nicht weiter über die beanstandete Ware verfügen, sofern er an seinem Nacherfüllungsverlangen festhalten will.

(6) Bei begründeter und rechtzeitiger Mängelrüge ist dem Lieferanten mit angemessener Frist die Möglichkeit zu geben, die Nacherfüllung nach eigener Wahl (Ersatzlieferung, Nachbesserung) vorzunehmen. Der Lieferant ist berechtigt, die geschuldete Nacherfüllung davon abhängig zu machen, dass der Besteller den fälligen Kaufpreis bezahlt. Der Besteller ist jedoch berechtigt, einen im Verhältnis zum Mangel angemessenen Teil des Kaufpreises zurückzubehalten.

(7) Im Falle des Lieferantenregresses gemäß § 445a BGB bedarf es für etwaige Mängelrechte des Bestellers gegen den Lieferanten wegen des vom Besteller geltend gemachten Mangels einer sonst erforderlichen Fristsetzung nicht, wenn der Besteller die verkaufte neu hergestellte Sache als Folge ihrer Mangelhaftigkeit zurücknehmen musste oder der Kunde des Bestellers den Kaufpreis gemindert hat.

(8) Im Falle einer Nachbesserung sind dem Lieferanten grundsätzlich zwei Nachbesserungsversuche zuzugestehen. Dem Besteller steht das Recht zur Minderung solange nicht zu, wie der Lieferant seinen Verpflichtungen zur Mängelbeseitigung nachkommt und die Nachbesserung nicht fehlgeschlagen ist. Schlägt auch eine zweite Nacherfüllung fehl, kann der Besteller – unbeschadet etwaiger Schadensersatzansprüche – die Vergütung mindern oder bei gegebener Verhältnismäßigkeit nach seiner Wahl vom Vertrag zurücktreten.

(9) Im Falle einer berechtigten Minderung gemäß vorstehender Ziffer (8) muss diese in einem angemessenen Verhältnis zu Art und Anzahl der aufgetretenen Mängel stehen.

(10) Hat der Besteller die bei Gefahrübergang mangelhafte Ware gemäß ihrer Art und ihrem Verwendungszweck in eine andere Sache eingebaut oder an eine andere Sache angebracht, kann er vom Lieferanten gemäß § 439 Abs. 3 BGB im Rahmen der Nacherfüllung Ersatz der erforderlichen Aufwendungen für das Entfernen der mangelhaften und den Einbau oder das Anbringen der nachgebesserten oder gelieferten mangelfreien Ware („Aus- und Einbaukosten") verlangen. Ein solcher Anspruch auf Aufwendungsersatz ist ausgeschlossen, wenn der Besteller den Mangel der Ware vor Einbau oder Anbringung an die andere Sache kannte.

(11) Erforderlich i. S. d. § 439 Abs. 3 BGB sind nur solche Aus- und Einbaukosten, die den Aus- und Einbau bzw. das Anbringen identischer Produkte betreffen. Die Kosten sind dem Lieferanten durch Vorlage geeigneter Belege mindestens in Textform nachzuweisen. Personal- und Sachkosten, die der Besteller in diesem Zusammenhang geltend macht, sind auf Selbstkostenbasis des Bestellers ohne Gewinnanteil zu berechnen. Ein Vorschussrecht des Bestellers für Aus- und Einbaukosten ist ausgeschlossen. Es ist dem Besteller auch nicht gestattet, Aufwendungsersatzansprüche für Aus- und Einbaukosten einseitig ohne Einwilligung des Lieferanten mit Kaufpreisforderungen oder anderweitigen Zahlungsansprüchen des Lieferanten aufzurechnen. Über die erforderlichen Aus- und Einbaukosten hinausgehende Forderungen des Bestellers, insbesondere Kosten für mangelbedingte Folgeschäden wie beispielsweise entgangener Gewinn einschließlich kalkulatorischer Gewinnzuschläge, Betriebsausfallkosten oder Mehrkosten für Ersatzbeschaffungen sind keine Aus- und Einbaukosten und daher nicht im Rahmen der Nacherfüllung gemäß § 439 Abs. 3 BGB ersatzfähig.

(12) Eine Verhältnismäßigkeit der Kosten der Nacherfüllung muss gegeben sein; dies insbesondere im Verhältnis zum Kaufpreis der Ware in mangelfreiemZustand und unter Berücksichtigung der Bedeutung der Vertragswidrigkeit (z.B. Funktions- oder optischer Mangel). Andernfalls ist der Lieferant berechtigt, die Nacherfüllung unter den gesetzlichen Voraussetzungen zu verweigern.

(13) Kommt der Lieferant der Nacherfüllung gemäß obiger Ziffer (6) nicht nach oder schlägt die Nacherfüllung gemäß obiger Ziffer (8) fehl, ist der Besteller zur Herabsetzung des Preises oder zum Rücktritt vom Vertrag jeweils nur bezüglich des mangelhaften Teils der Leistung bzw. Ware berechtigt.

(14) Gesetzliche Rückgriffsansprüche des Bestellers gegen den Lieferanten bestehen nur insoweit, als die gesetzlichen Voraussetzungen erfüllt sind. Daher bestehen keine Rückgriffsansprüche, wenn der Besteller mit seinem Kunden über die gesetzlichen Mängelansprüche hinausgehende Vereinbarungen im Rahmen einer Garantie oder aus Kulanz getroffen hat.

(15) Für Beeinträchtigungen der Ware infolge natürlicher Abnutzung, insbesondere bei Verschleißteilen, unsachgemäßer Handhabung, Montage, Nutzung oder Lagerung sowie unsachgemäß ausgeführter Änderungen oder Reparaturen durch den Besteller oder Dritte entstehen keine Mängelansprüche.

(16) Im Falle eines nur unerheblichen Mangels ist dem Besteller der Rücktritt vom Vertrag versagt. Auch ist ihm in diesem Fall ein Anspruch auf Schadensersatz statt der Leistung verwehrt.

(17) Chargenunterschiede im Sinne material- und oberflächenbedingt unvermeidbarer Verfahrenstoleranzen sowie produkttypische Eigenschaften, welche lediglich ein geringfügiges optisches Beanstandungskriterium darstellen, bedeuten keinen Mangel. Grenzmuster für Abgleich werden auf Anfrage des Bestellers im Vorfeld eines Vertrages zur Verfügung gestellt. Zur Erläuterung material- und oberflächenbedingt unvermeidbarer Verfahrenstoleranzen – beispielsweise für Oberflächenausführung „natureloxiertes Aluminium" verweist der Lieferant auf das Merkblatt A 03 Farbtoleranzen bei der dekorativen Anodisation des VOA Verband für die Oberflächenveredelung von Aluminium e.V. (www.voa.de).

(18) Abweichend von § 438 Abs. 1 Nr. 3 BGB kann der Besteller Ansprüche wegen Sach- und Rechtsmängeln innerhalb von 12 Monaten gerechnet ab Gefahrübergang geltend machen. Die gesetzlichen Sonderregelungen zur Verjährung nach Maßgabe des § 438 Abs. 1 Nr. 1, § 438 Abs. 1 Nr. 2, § 438 Abs. 3, § 444 und § 445b

BGB bleiben unberührt.

(19) Im Falle einer unberechtigten Mängelrüge hat der Besteller die Aufwendungen des Lieferanten zur Prüfung und – soweit verlangt – zur Beseitigung des Mangels zu ersetzen, es sei denn, die fehlende Mangelhaftigkeit war für den Besteller nicht erkennbar.

(20) Unberührt bleiben die gesetzlichen Sondervorschriften im Falle der Endlieferung der neu hergestellten, unverarbeiteten Ware an einen Verbraucher (Lieferantenregress gemäß § 478 BGB), auch wenn dieser die Ware nachfolgend verarbeitet.

(21) Ansprüche aus Lieferantenregress gemäß § 445a BGB und § 478 BGB sind ausgeschlossen, wenn die mangelhafte Ware durch den Besteller oder einen anderen Unternehmer, z. B. durch Einbau in ein anderes Produkt, weiterverarbeitet wurde und dem Lieferanten somit nur die Stellung eines Zulieferers zukommt.

10 Schadensersatz/Haftung

(1) Schadensersatzansprüche des Bestellers, gleich aus welchem Rechtsgrund, insbesondere wegen Verletzung von vertraglichen oder außervertraglichen Pflichten des Lieferanten, sind ausgeschlossen, soweit nicht eine zwingende Haftung des Lieferanten nach dem Produkthaftungsgesetz oder eine Haftung für vorsätzliches oder grob fahrlässiges Verhalten besteht; im Falle einfacher Fahrlässigkeit haftet der Lieferant nur für Schäden aus der Verletzung des Lebens, des Körpers oder der Gesundheit oder für Schäden aus der Verletzung wesentlicher Vertragspflichten (eine wesentliche Vertragspflicht ist eine Pflicht, deren Erfüllung die ordnungsgemäße Durchführung des Vertrags überhaupt erst ermöglicht und auf deren Einhaltung der Besteller regelmäßig vertraut und vertrauen darf). Im Falle der Verletzung einer wesentlichen Vertragspflicht ist die Haftung des Lieferanten auf den Ersatz des vorhersehbaren, typischerweise eintretenden Schadens begrenzt.

(2) Die sich aus der vorstehenden Ziffer (1) ergebenden Haftungsbeschränkungen gelten auch bei Pflichtverletzungen durch bzw. zugunsten von Personen, deren Verschulden der Lieferant nach gesetzlichen Vorschriften zu vertreten hat. Sie gelten nicht, soweit der Lieferant einen Mangel arglistig verschwiegen oder eine Garantie für die Beschaffenheit der Ware übernommen hat.

(3) Der Lieferant haftet nicht für Schäden, die durch unsachgemäße Einwirkung Dritter, unsachgemäße Montage, Überbeanspruchung, Überspannung oder chemische Einflüsse entstehen, sofern diese nicht auf ein Verschulden des Lieferanten oder seiner Vertreter zurückzuführen sind. Gleiches gilt bei eigenmächtigen und unsachgemäßen Reparaturen oder Eingriffen in den Liefergegenstand durch den Besteller oder Dritte.

(4) Für vertragliche und außervertragliche Schadens- und Aufwendungsersatzansprüche im Zusammenhang mit der Mangelhaftigkeit der Ware gelten die in §9 Ziffer (18) vorgesehenen Verjährungsfristen, es sei denn, die Anwendung der regelmäßigen gesetzlichen Verjährung (§§ 195, 199 BGB) würde im Einzelfall zu einer kürzeren Verjährung führen. Für Schadenersatzansprüche aufgrund einer Haftung nach dem Produkthaftungsgesetz, aufgrund der Haftung wegen vorsätzlichen oder grob fahrlässigen Verhaltens sowie wegen der Verletzung des Lebens, des Körpers oder der Gesundheit gelten die gesetzlichen Verjährungsfristen.

11 Herstellergarantie

Der Lieferant bietet dem Besteller für alle unter der Marke „Neko“ vertriebenen Produkte zusätzlich eine 5-jährige Herstellergarantie bei Indoorprodukten und 3-jähriger Herstellergarantie bei Outdoorprodukten an. Die jeweils gültigen Garantiebedingungen sind bei den einzelnen Produkten angegeben. Die Voraussetzungen und der Leistungsumfang des Lieferanten im Rahmen dieser Herstellergarantie ergeben sich aus den Garantiebedingungen. Die Garantie- und Registrierungsbedingungen werden dem Besteller auf Anfrage übermittelt und sind auch im Internet unter www.nekolighting.de verfügbar. Gesetzliche bzw. die nach diesen Verkaufs- und Lieferbedingungen bestehenden Mängelrechte des Bestellers gegenüber dem Lieferanten werden von der Herstellergarantie nicht berührt. Sie bestehen uneingeschränkt und unabhängig von einer etwaigen Geltendmachung der Herstellergarantie.

12 Erfüllungsort und Gerichtsstand

(1) Diese Verkaufs- und Lieferbedingungen und die Vertragsbeziehung zwischen dem Lieferanten und dem Besteller unterliegen dem Recht der Bundesrepublik Deutschland unter Ausschluss des UN-Kaufrechts (CISG).

(2) Erfüllungsort und ausschließlicher Gerichtsstand für alle Streitigkeiten aus oder im Zusammenhang mit der Vertragsbeziehung ist Ahlen. Ist der Besteller kein Kaufmann oder eine juristische Person des öffentlichen Rechts gilt dies nur, wenn der Besteller keinen allgemeinen Gerichtsstand in Deutschland hat oder als im Klageweg in Anspruch zu nehmende Partei seinen Wohnsitz oder gewöhnlichen Aufenthalt nach Vertragsschluss ins Ausland verlegt oder der Wohnsitz oder gewöhnlicher Aufenthalt unbekannt ist Der Lieferant ist in allen Fällen jedoch auch berechtigt, Klage am Erfüllungsort der Lieferverpflichtung gemäß dieser Verkaufs- und Lieferbedingungen bzw. einer vorrangigen Individualabrede oder am allgemeinen Gerichtsstand des Bestellers zu erheben. Zwingende gesetzliche Vorschriften, insbesondere zu ausschließlichen Zuständigkeiten, bleiben unberührt.

Copyright © Neko Lighting GmbH

NEKO
THINK DESIGN

NEKO Lighting AG
Swiss Headquarter
Kreuzstrasse 2
CH-8008 Zürich
Switzerland

Tel. +41 44 451 80 15

sales@nekolighting.com

NEKO Lighting GmbH
German Office
Kruppstr. 47
59227 Ahlen
Germany

Sales / Marketing
Lange Reihe 170
59071 Hamm
Germany

Tel.: +49 2381 877 09 60

sales@nekolighting.de

NEKO Lighting
France Office
8 rue du Sentier
75002 Paris
France

Tel. +33 1 44 50 20 30

sales@nekolighting.fr

CB | CE | c UL us LISTED | | | ISO9001