


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.9V I:0.0653A P:13.85W PF:0.9604 Freq:49.99Hz Lamp Flux:1104.82x1 lm		
NAME: ROXY S-Z-15W-930-35-60#60	TYPE:Tracklight	SERIAL No.:
SPEC.:3000K	DIM.: ϕ 72mm*H115mm	
MFR.: NEKO LIGHTING AG		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.79 lm/W			
MODEL	CITIZEN-3000K	I _{max} (cd)	1534	S/MH (C0/180)	0.80
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.82
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1104.8	η UP,DN (C0-180)	0.0,53.4
NOMINAL FLUX (lm)	1104.82	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,46.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	220	η down (%)	100.0	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

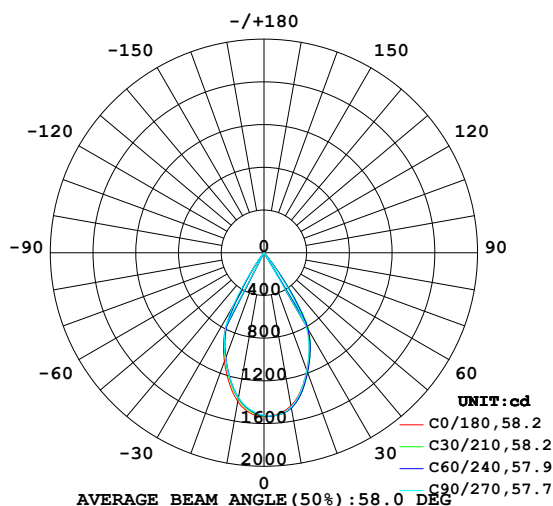

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

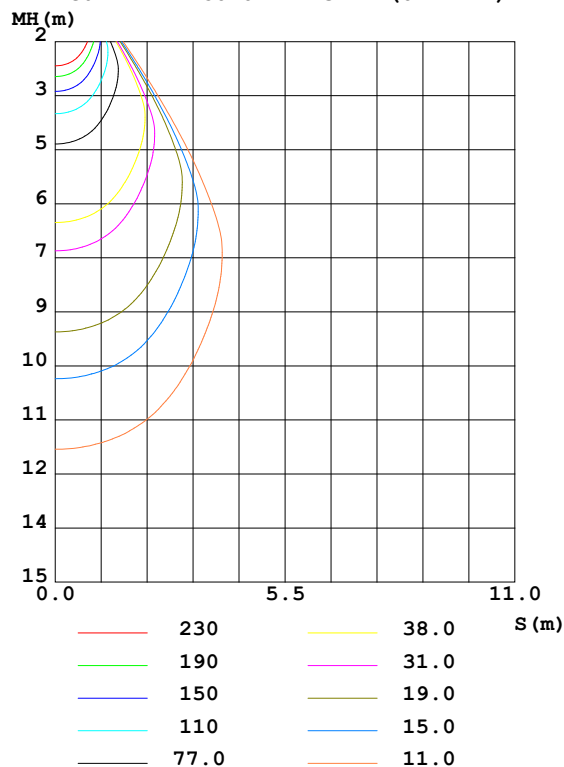

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Long
Test Date:2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1455	1480	1467	1438	1413	1377	1378	1391	0- 10	140.8	140.8	12.7,12.7
20	1172	1202	1173	1127	1084	1043	1052	1085	10- 20	358.0	498.7	45.1,45.1
30	810.3	841.0	773.0	674.3	541.2	498.8	592.7	689.7	20- 30	422.9	921.6	83.4,83.4
40	64.13	72.49	43.93	23.60	15.65	15.19	19.88	29.00	30- 40	172.1	1094	99,99
50	4.332	4.402	3.856	3.383	2.923	2.697	3.013	3.469	40- 50	8.230	1102	99.7,99.7
60	1.377	1.284	1.210	1.184	1.092	1.002	1.081	1.216	50- 60	1.804	1104	99.9,99.9
70	0.4249	0.3799	0.3417	0.2905	0.2687	0.2953	0.3057	0.3502	60- 70	0.6857	1104	100,100
80	0.2143	0.1727	0.1816	0.1591	0.1573	0.1881	0.1770	0.2078	70- 80	0.2509	1105	100,100
90	0.1552	0.1443	0.1268	0.0678	0.0306	0.0328	0.0350	0.1093	80- 90	0.1593	1105	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1099.8 lm

%lum = 99.5%

%lamp = 99.5%

Conical surface Flux(120deg): 1103.7 lm

%lum = 99.9%


%lamp = 99.9%

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Long
Test Date:2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.9V I:0.0653A P:13.85W PF:0.9604 Freq:49.99Hz Lamp Flux:1104.82x1 lm		
NAME: ROXY S-Z-15W-930-35-60#60	TYPE:Tracklight	SERIAL No.:
SPEC.:3000K	DIM.: ϕ 72mm*H115mm	
MFR.: NEKO LIGHTING AG		

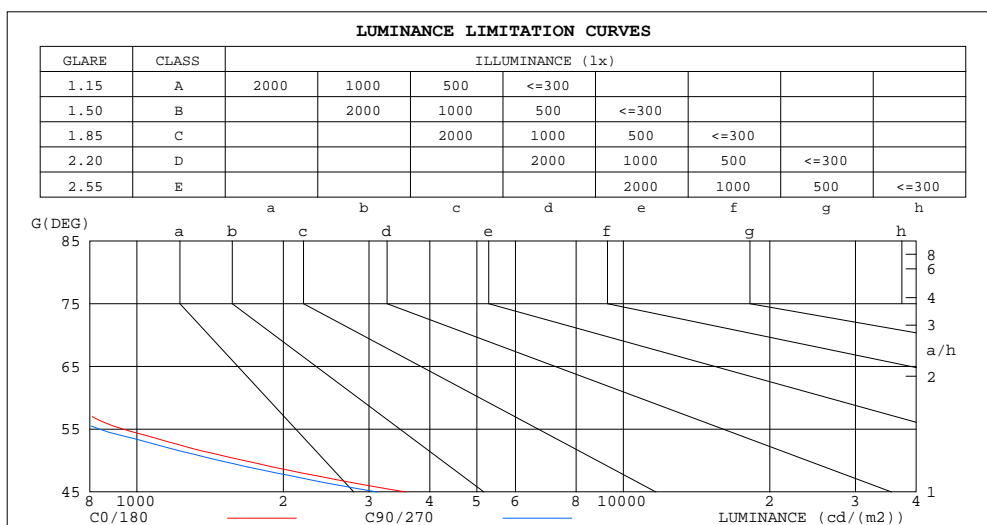

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	506	432
80	303	257
75	245	216
70	305	246
65	504	402
60	677	595
55	936	837
50	1656	1474
45	3575	3114


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Long
Test Date:2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.9V I:0.0653A P:13.85W PF:0.9604 Freq:49.99Hz Lamp Flux:1104.82x1 lm		
NAME: ROXY S-Z-15W-930-35-60#60	TYPE:Tracklight	SERIAL No.:
SPEC.:3000K	DIM.: $\phi 72\text{mm} \times H115\text{mm}$	
MFR.: NEKO LIGHTING AG		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.98	1.03	.99	.97	.90	.97	.94	.97	.94	.92	.94	.92	.91	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.87	.90	.87	.85	.84
4.0	.93	.87	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.87	.82	.78	.86	.81	.78	.85	.80	.77	.83	.79	.76	.82	.78	.76	.74
6.0	.83	.77	.73	.82	.77	.73	.80	.76	.72	.79	.75	.72	.78	.74	.71	.70
7.0	.78	.73	.69	.78	.72	.69	.76	.72	.68	.75	.71	.68	.74	.70	.68	.66
8.0	.74	.69	.65	.74	.68	.65	.73	.68	.64	.72	.67	.64	.71	.67	.64	.63
9.0	.70	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.67	.64	.61	.59
10.0	.67	.62	.58	.67	.61	.58	.66	.61	.58	.65	.61	.58	.64	.60	.58	.56

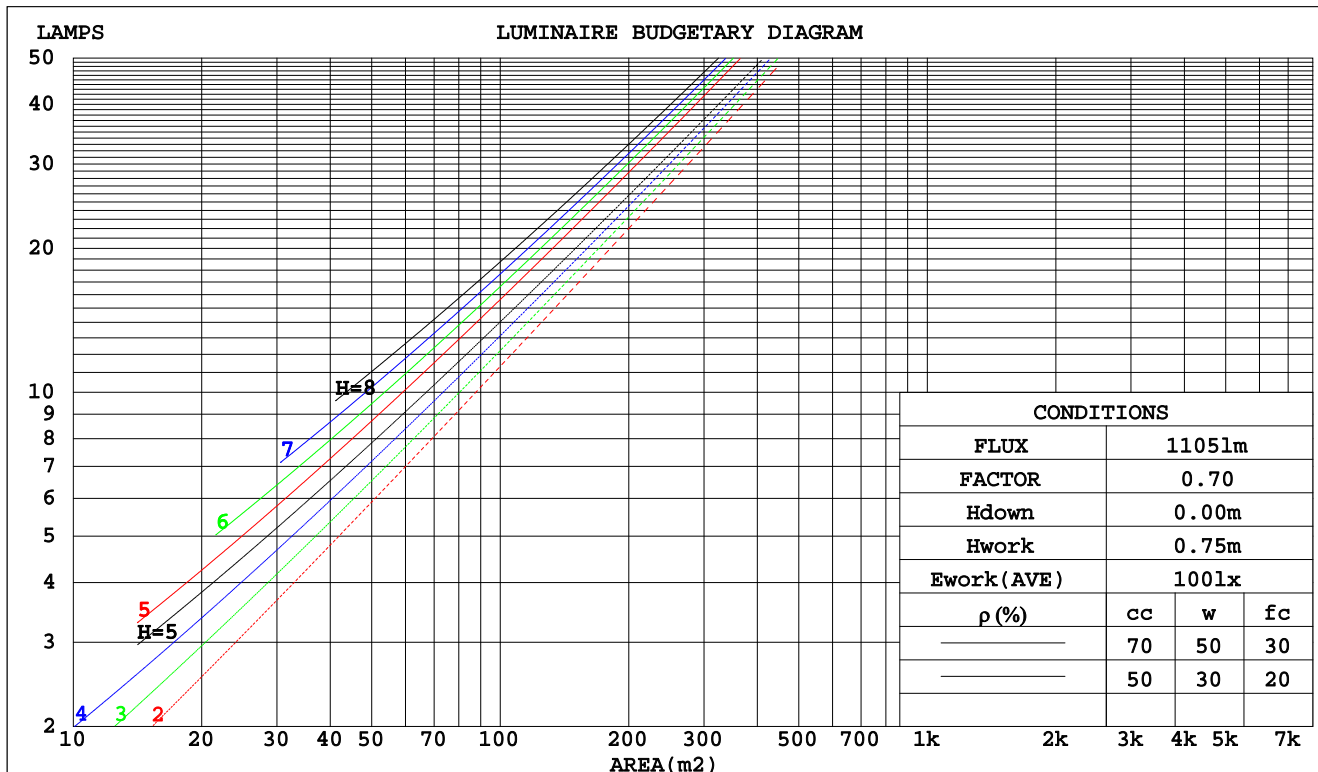

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Long
Test Date:2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.9V I:0.0653A P:13.85W PF:0.9604 Freq:49.99Hz Lamp Flux:1104.82x1 lm		
NAME: ROXY S-Z-15W-930-35-60#60	TYPE:Tracklight	SERIAL No.:
SPEC.:3000K	DIM.: φ72mm*H115mm	
MFR.: NEKO LIGHTING AG		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.165	.094	.030	.159	.090	.029	.146	.084	.027	.135	.078	.025	.124	.072	.023		
2.0	.157	.086	.026	.151	.083	.026	.141	.078	.024	.131	.074	.023	.122	.069	.022		
3.0	.149	.079	.024	.145	.077	.023	.136	.073	.022	.127	.070	.021	.120	.066	.021		
4.0	.142	.074	.022	.138	.072	.021	.130	.069	.021	.123	.066	.020	.117	.063	.019		
5.0	.136	.069	.020	.132	.068	.020	.125	.065	.019	.119	.063	.019	.114	.061	.018		
6.0	.130	.065	.019	.127	.064	.018	.121	.062	.018	.115	.060	.018	.110	.058	.017		
7.0	.124	.061	.017	.121	.061	.017	.116	.059	.017	.112	.057	.017	.107	.056	.016		
8.0	.119	.058	.016	.117	.057	.016	.112	.056	.016	.108	.055	.016	.104	.053	.016		
9.0	.115	.055	.015	.112	.055	.015	.108	.054	.015	.104	.052	.015	.101	.051	.015		
10.0	.110	.053	.015	.108	.052	.015	.105	.051	.014	.101	.050	.014	.098	.049	.014		

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.154	.133	.114	.132	.114	.099	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.141	.113	.091	.121	.098	.079	.083	.068	.056	.048	.040	.033	.015	.013	.011	
4.0	.130	.099	.074	.112	.085	.065	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.121	.087	.061	.104	.075	.053	.072	.052	.038	.042	.031	.022	.013	.010	.007	
6.0	.114	.077	.051	.098	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.107	.070	.043	.092	.060	.038	.064	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.102	.063	.037	.087	.055	.032	.060	.039	.023	.035	.023	.014	.011	.007	.005	
9.0	.096	.058	.032	.083	.050	.028	.058	.035	.020	.034	.021	.012	.011	.007	.004	
10.0	.092	.054	.028	.079	.047	.025	.055	.033	.017	.032	.019	.010	.010	.006	.003	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Long
Test Date:2020-01-04

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.9V I:0.0653A P:13.85W PF:0.9604 Freq:49.99Hz Lamp Flux:1104.82x1 lm											
NAME: ROXY S-Z-15W-930-35-60#60					TYPE:Tracklight			SERIAL No.:			
SPEC.:3000K					DIM.: \varnothing 72mm*H115mm						
MFR.: NEKO LIGHTING AG											
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		20.2	21.0	20.4	21.2	21.4	19.5	20.3	19.7	20.5	20.7
	3H	20.0	20.8	20.2	21.0	21.2	19.3	20.1	19.6	20.3	20.5
	4H	19.9	20.7	20.2	20.9	21.1	19.2	20.0	19.5	20.2	20.4
	6H	19.8	20.5	20.1	20.8	21.0	19.1	19.8	19.4	20.1	20.3
	8H	19.8	20.5	20.1	20.7	21.0	19.1	19.8	19.4	20.0	20.3
	12H	19.7	20.4	20.0	20.6	20.9	19.0	19.7	19.4	20.0	20.2
4H	2H	19.9	20.7	20.2	20.9	21.1	19.2	20.0	19.5	20.2	20.4
	3H	19.7	20.4	20.0	20.6	20.9	19.0	19.7	19.4	20.0	20.2
	4H	19.6	20.2	20.0	20.5	20.8	19.0	19.5	19.3	19.8	20.1
	6H	19.5	20.1	19.9	20.4	20.7	18.9	19.4	19.2	19.7	20.0
	8H	19.5	20.0	19.9	20.3	20.7	18.8	19.3	19.2	19.6	20.0
	12H	19.4	19.9	19.8	20.2	20.6	18.7	19.2	19.2	19.6	19.9
8H	4H	19.5	20.0	19.9	20.3	20.7	18.8	19.3	19.2	19.6	20.0
	6H	19.4	19.8	19.8	20.2	20.6	18.7	19.1	19.1	19.5	19.9
	8H	19.3	19.7	19.8	20.1	20.5	18.6	19.0	19.1	19.4	19.8
	12H	19.3	19.6	19.7	20.0	20.5	18.6	18.9	19.1	19.3	19.8
12H	4H	19.4	19.9	19.8	20.2	20.6	18.7	19.2	19.2	19.6	19.9
	6H	19.3	19.7	19.8	20.1	20.5	18.6	19.0	19.1	19.4	19.8
	8H	19.3	19.6	19.7	20.0	20.5	18.6	18.9	19.1	19.3	19.8
Variations with the observer position at spacings:											
S = 1.0H	+ 4.5 / -19.0					+ 4.2 / -18.0					
1.5H	+ 7.3 / -17.4					+ 6.9 / -16.3					
2.0H	+ 5.4 / - 3.9					+ 5.1 / - 4.0					

CIE Pub.117, 1105 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.3$)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason Long
 Test Date:2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:58%
 Test Distance:5.850m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.9V I:0.0653A P:13.85W PF:0.9604 Freq:49.99Hz Lamp Flux:1104.82x1 lm		
NAME: ROXY S-Z-15W-930-35-60#60	TYPE:Tracklight	SERIAL No.:
SPEC.:3000K	DIM.: $\varnothing 72\text{mm} \times H115\text{mm}$	
MFR.: NEKO LIGHTING AG		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	90	85	82	78
0.80	98	93	89	97	92	89	96	92	89	86
1.00	102	97	93	101	96	93	99	96	93	89
1.25	105	101	97	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason Long
 Test Date:2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:58%
 Test Distance:5.850m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.9V I:0.0653A P:13.85W PF:0.9604 Freq:49.99Hz Lamp Flux:1104.82x1 lm		
NAME: ROXY S-Z-15W-930-35-60#60	TYPE:Tracklight	SERIAL No.:
SPEC.:3000K	DIM.: ϕ 72mm*H115mm	
MFR.: NEKO LIGHTING AG		

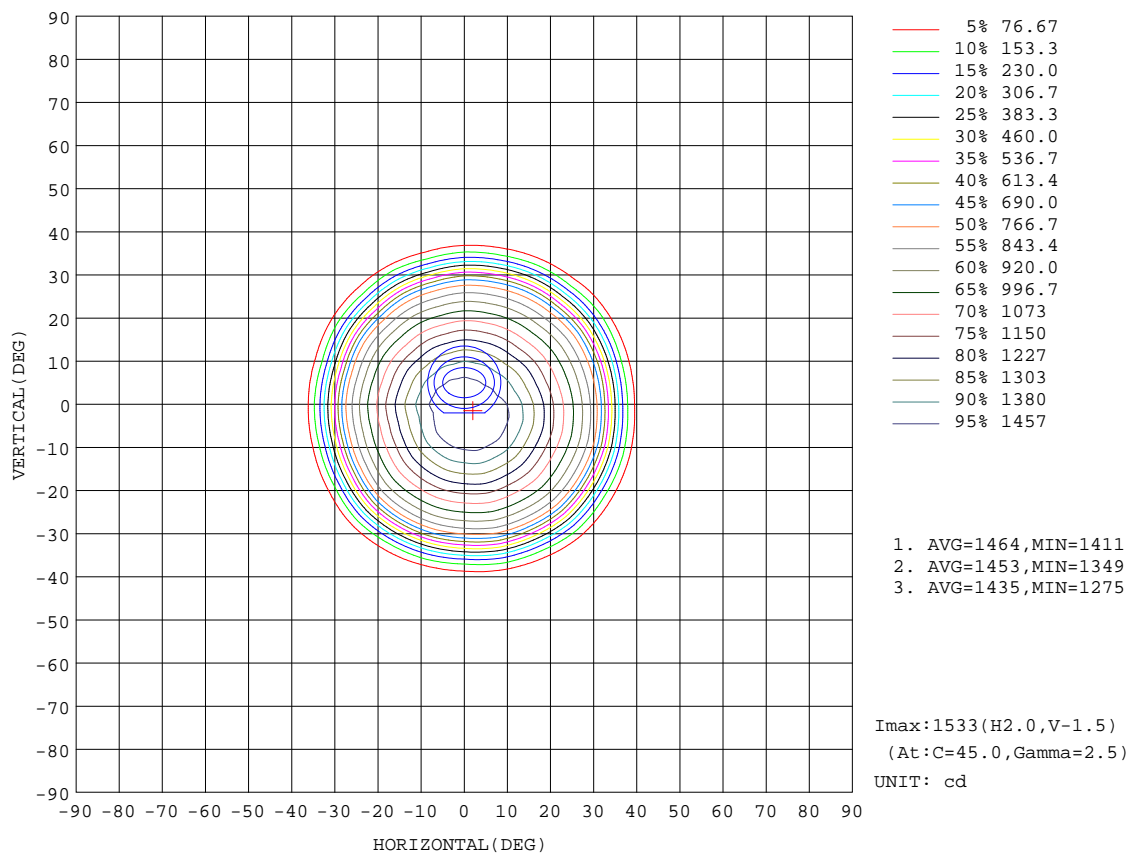


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Long
Test Date:2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.9V I:0.0653A P:13.85W PF:0.9604 Freq:49.99Hz Lamp Flux:1104.82x1 lm		
NAME: ROXY S-Z-15W-930-35-60#60	TYPE:Tracklight	SERIAL No.:
SPEC.:3000K	DIM.: ϕ 72mm*H115mm	
MFR.: NEKO LIGHTING AG		

Flux out:883.2 lm

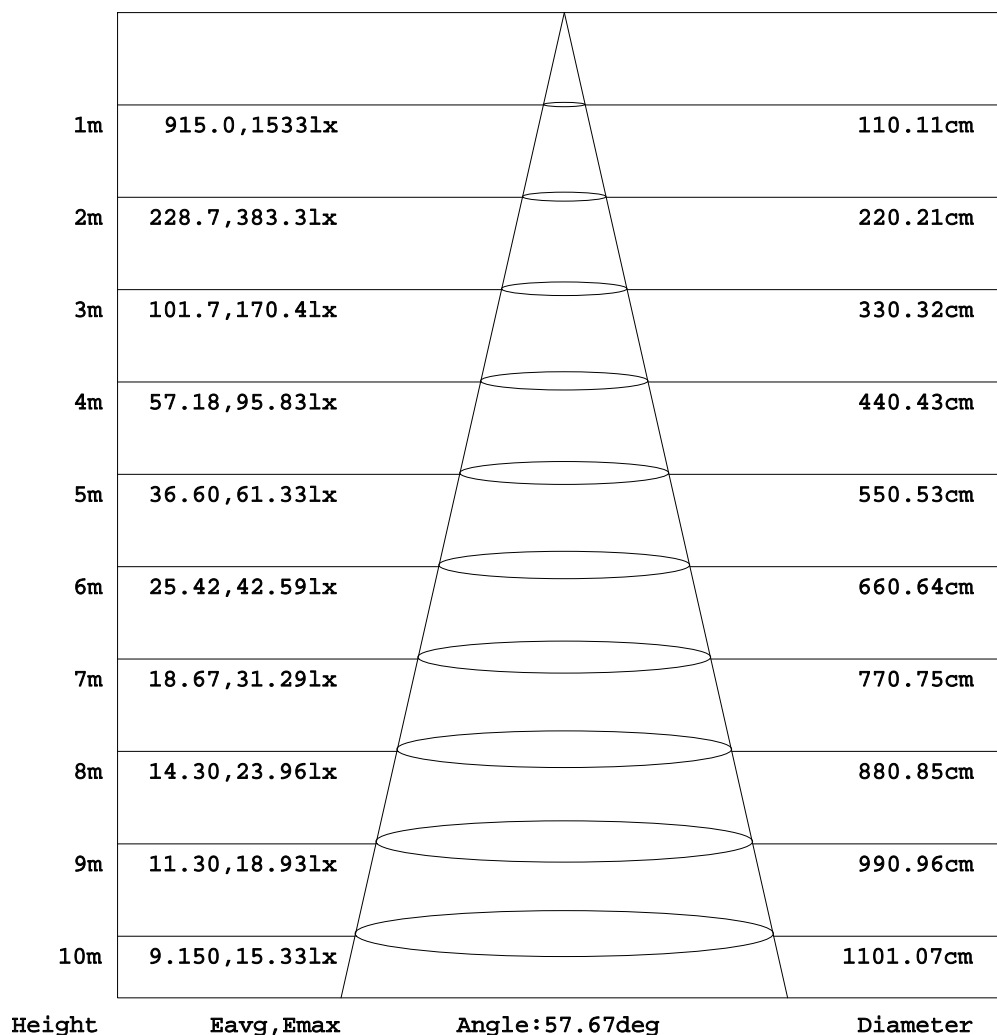


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Long
Test Date:2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.9V I:0.0653A P:13.85W PF:0.9604 Freq:49.99Hz Lamp Flux:1104.82x1 lm		
NAME: ROXY S-Z-15W-930-35-60#60	TYPE:Tracklight	SERIAL No.:
SPEC.:3000K	DIM.: ϕ 72mm*H115mm	
MFR.: NEKO LIGHTING AG		

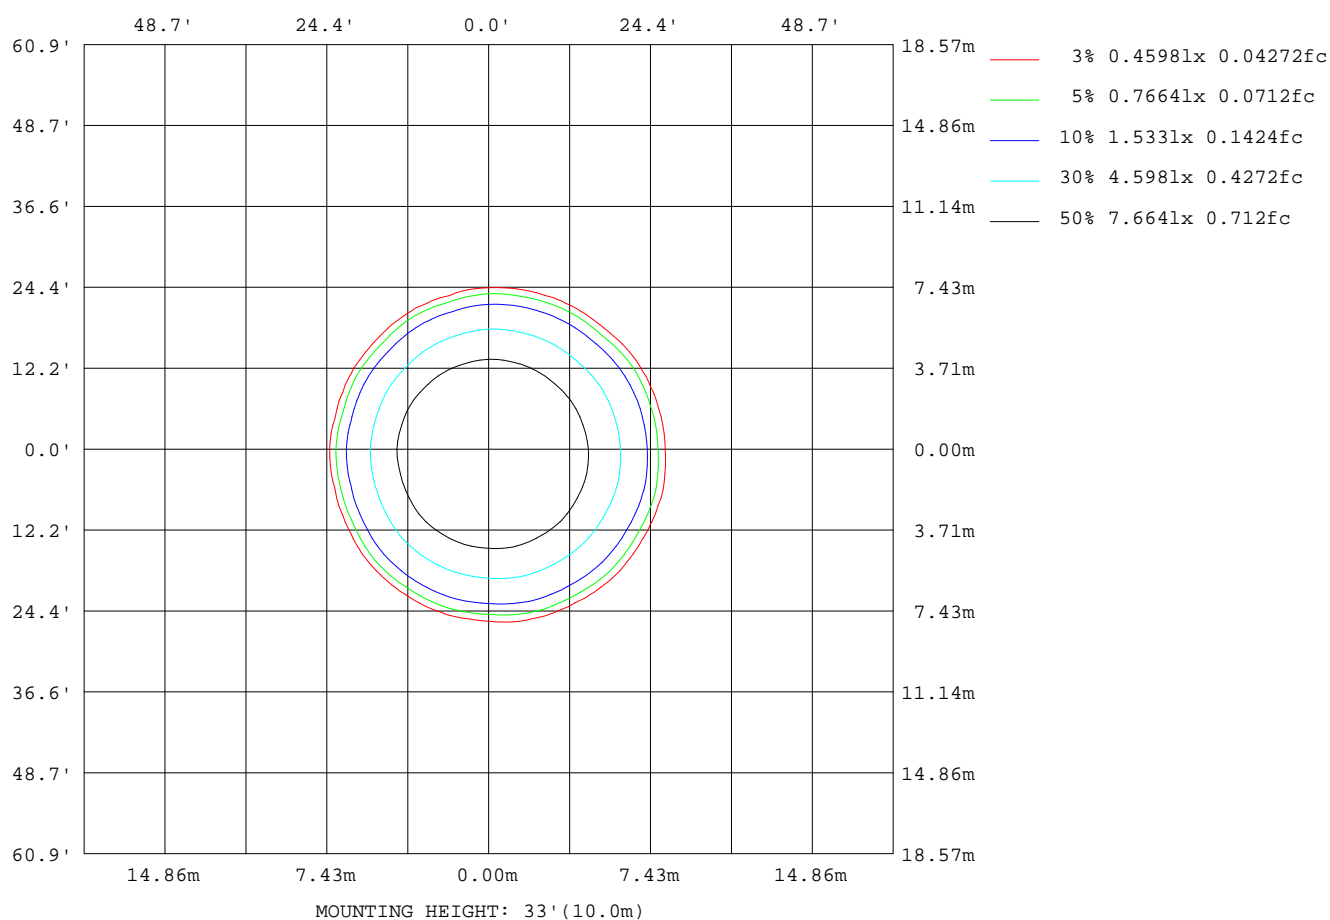

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Long
Test Date:2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.9V I:0.0653A P:13.85W PF:0.9604 Freq:49.99Hz Lamp Flux:1104.82x1 lm		
NAME: ROXY S-Z-15W-930-35-60#60	TYPE:Tracklight	SERIAL No.:
SPEC.:3000K	DIM.: ϕ 72mm*H115mm	
MFR.: NEKO LIGHTING AG		


AvgL	cd/m2
L_0~180 (65) av	408
L_0~180 (75) av	219
L_0~180 (85) av	431
L_90~270 (65) av	369
L_90~270 (75) av	219
L_90~270 (85) av	416
L_45 (65) av	388
L_45 (75) av	219
L_45 (85) av	424

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Long
Test Date:2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

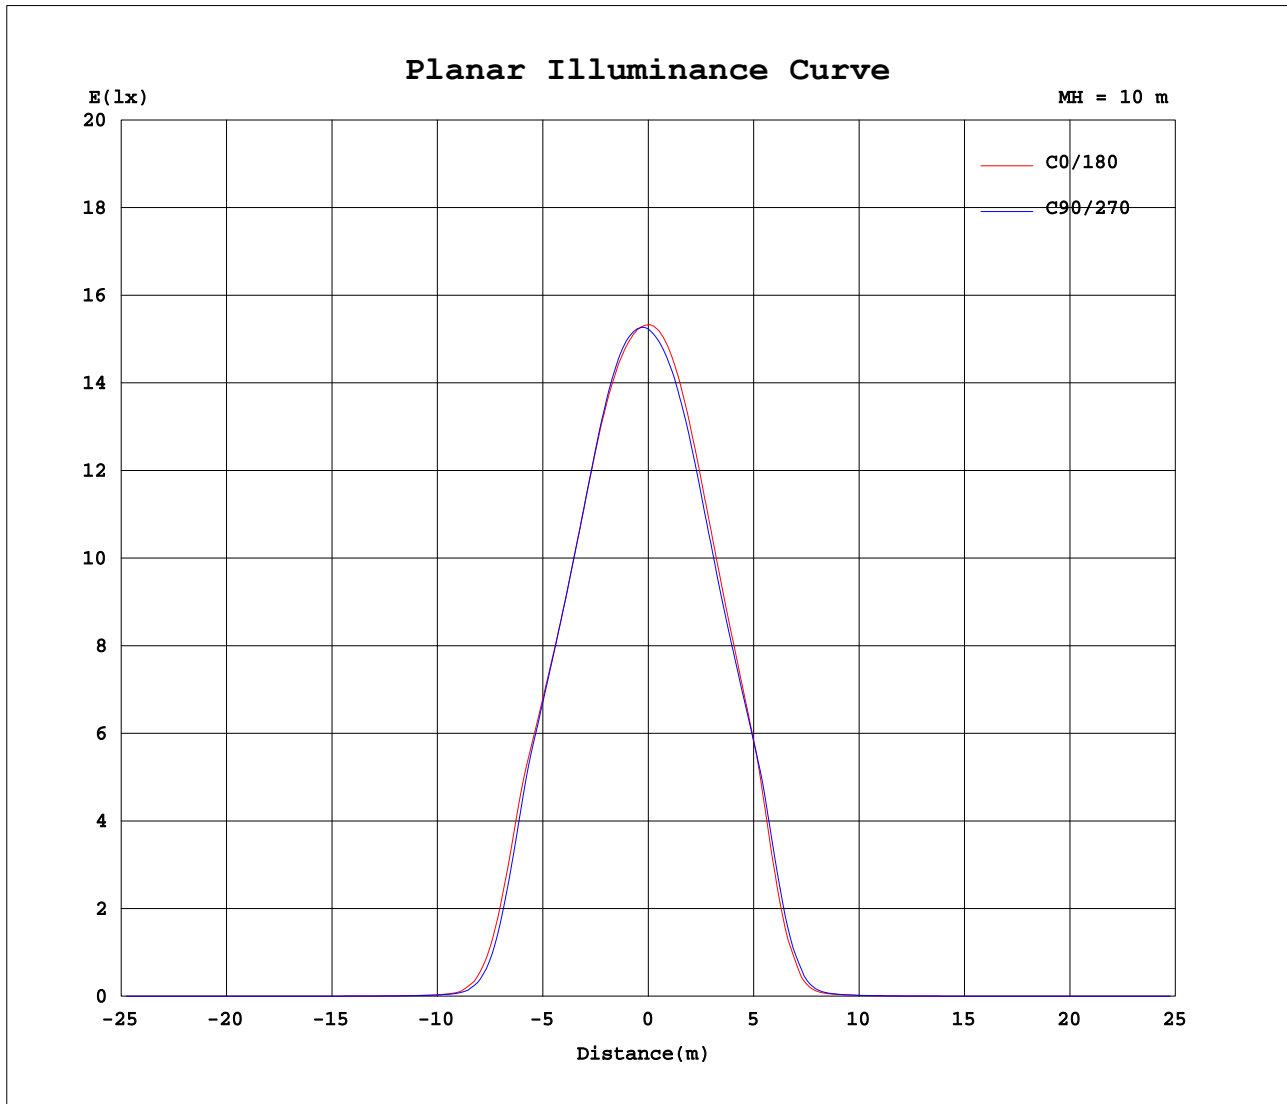

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason Long
Test Date: 2020-01-04

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 58%
Test Distance: 5.850m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

```