

**NEW**

FUSION G2 Fixed



FUSION G2 FF1  
2W/ 200lm @CRI90 3000K



FUSION G2 FF2  
4W/ 400lm @CRI90 3000K



FUSION G2 FF3  
6W/ 580lm @CRI90 3000K



FUSION G2 FF5  
11W/ 900lm @CRI90 3000K



FUSION G2 FF10  
22W/ 1900lm @CRI90 3000K


FUSION G2 Trimless Fixed



FUSION G2 FFT5  
11W/ 900lm @CRI90 3000K



FUSION G2 FFT10  
22W/ 1900lm @CRI90 3000K

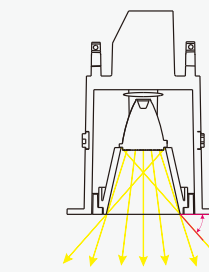


50° Shielding Angle:50°

**FUSION**

LED: OSRAM  
Beam: 24°, 40°  
Shielding Angle: 50°  
UGR: <16

**VS**



35° Shielding Angle:35°

**FUSION G2**

LED: Bridgelux  
Beam:15°, 24°, 48°, 60°  
Shielding Angle: 35°  
UGR:<19  
Higher Efficiency  
Higher R9 Value

FUSION G2 Adjustable




FUSION G2 FA5  
11W/ 900lm @CRI90 3000K



FUSION G2 FA10  
22W/ 1900lm @CRI90 3000K

**Beam Angles**

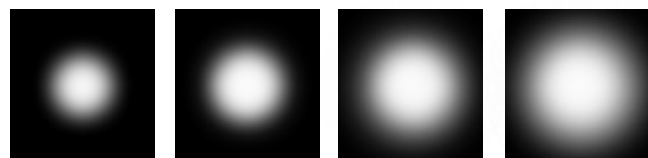

Spot 15°    Medium 24°    Flood 48°    Wide Flood 60°

**Finsh**




White



Black



# FUSION G2 FF1 – Fixed LED Downlight

**NEW**

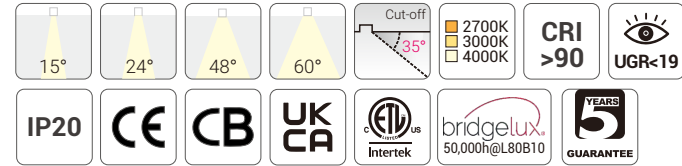


### Quick Info


- Ceiling Cut-out: 37x37mm
- Bridgelux LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 220lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

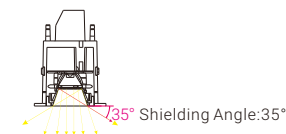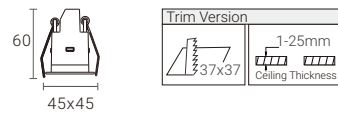

### Light Distribution

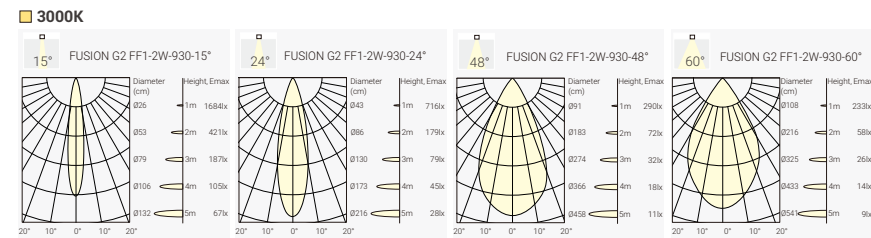

### Finish



### Order Info (FUSION G2 FF1 in White Trim & Black Reflector as an Example)

| LED Power | System Power | LED Voltage | LED Current | CRI   | CCT   | Beam  | LED Output | System Output     | Code              |
|-----------|--------------|-------------|-------------|-------|-------|-------|------------|-------------------|-------------------|
| 2W        | 3W           | 3V          | 700mA       | 90    | 2700K | 15°   | 230lm      | 190lm             | FF1G2-9271502N-WB |
|           |              |             |             |       |       | 24°   | 230lm      | 180lm             | FF1G2-9272402N-WB |
|           |              |             |             |       |       | 48°   | 230lm      | 180lm             | FF1G2-9274802N-WB |
|           |              |             |             |       |       | 60°   | 230lm      | 180lm             | FF1G2-9276002N-WB |
|           |              |             |             | 3000K | 15°   | 240lm | 200lm      | FF1G2-9301502N-WB |                   |
|           |              |             |             |       | 24°   | 240lm | 190lm      | FF1G2-9302402N-WB |                   |
|           |              |             |             |       | 48°   | 240lm | 190lm      | FF1G2-9304802N-WB |                   |
|           |              |             |             |       | 60°   | 240lm | 190lm      | FF1G2-9306002N-WB |                   |
|           |              |             |             | 4000K | 15°   | 260lm | 220lm      | FF1G2-9401502N-WB |                   |
|           |              |             |             |       | 24°   | 260lm | 200lm      | FF1G2-9402402N-WB |                   |
|           |              |             |             |       | 48°   | 260lm | 200lm      | FF1G2-9404802N-WB |                   |
|           |              |             |             |       | 60°   | 260lm | 200lm      | FF1G2-9406002N-WB |                   |


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

### Coding

| Model         | CRI/ CCT      | Beam Angle | LED Power | Control   | Finish | Reflector Color | Accessory |
|---------------|---------------|------------|-----------|-----------|--------|-----------------|-----------|
| FF1G2         | 927           | 15°        | 02        | N         | W      | B               |           |
| FUSION G2 FF1 | CRI>90/ 2700K | 15°        | 2W        | No Driver | White  | Black           |           |
|               | 930           | 24°        |           | F         | B      |                 |           |
|               | CRI>90/ 3000K | 24°        |           | On-Off    | Black  |                 |           |
|               | 940           | 48°        |           | P         |        |                 |           |
|               | CRI>90/ 4000K | 48°        |           | Phase Dim |        |                 |           |
|               |               | 60°        |           | A         |        |                 |           |
|               |               | 60°        |           | 1-10V Dim |        |                 |           |
|               |               |            |           | D         |        |                 |           |
|               |               |            |           | DALI Dim  |        |                 |           |



# FUSION G2 FF2 – Fixed LED Downlight

**NEW**

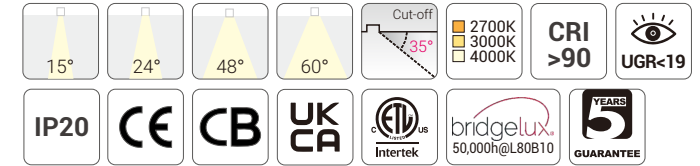


### Quick Info


- Ceiling Cut-out: 68x37mm
- Bridgelux LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

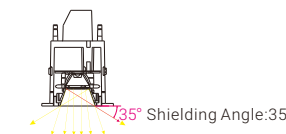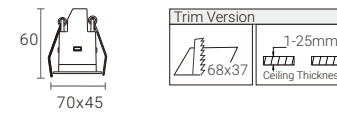

### Light Distribution

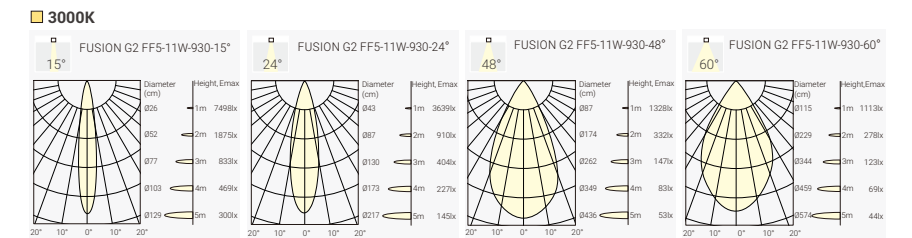

### Finish



### Order Info (FUSION G2 FF2 in White Trim & Black Reflector as an Example)

| LED Power | System Power | LED Voltage | LED Current | CRI   | CCT   | Beam  | LED Output | System Output     | Code              |
|-----------|--------------|-------------|-------------|-------|-------|-------|------------|-------------------|-------------------|
| 4W        | 6W           | 6V          | 700mA       | 90    | 2700K | 15°   | 460lm      | 380lm             | FF2G2-8271510N-WB |
|           |              |             |             |       |       | 24°   | 460lm      | 350lm             | FF2G2-8272410N-WB |
|           |              |             |             |       |       | 48°   | 460lm      | 350lm             | FF2G2-8274810N-WB |
|           |              |             |             |       |       | 60°   | 460lm      | 350lm             | FF2G2-8276010N-WB |
|           |              |             |             | 3000K | 15°   | 480lm | 400lm      | FF2G2-8301510N-WB |                   |
|           |              |             |             |       | 24°   | 480lm | 360lm      | FF2G2-8302410N-WB |                   |
|           |              |             |             |       | 48°   | 480lm | 360lm      | FF2G2-8304810N-WB |                   |
|           |              |             |             |       | 60°   | 480lm | 360lm      | FF2G2-8306010N-WB |                   |
|           |              |             |             | 4000K | 15°   | 510lm | 420lm      | FF2G2-8401510N-WB |                   |
|           |              |             |             |       | 24°   | 510lm | 380lm      | FF2G2-8402410N-WB |                   |
|           |              |             |             |       | 48°   | 510lm | 380lm      | FF2G2-8404810N-WB |                   |
|           |              |             |             |       | 60°   | 510lm | 380lm      | FF2G2-8406010N-WB |                   |


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

### Coding

| Model         | CRI/ CCT      | Beam Angle | LED Power | Control   | Finish | Reflector Color | Accessory |
|---------------|---------------|------------|-----------|-----------|--------|-----------------|-----------|
| FF2G2         | 927           | 15°        | 04        | N         | W      | B               |           |
| FUSION G2 FF2 | CRI>90/ 2700K | 15°        | 4W        | No Driver | White  | Black           |           |
|               | 930           | 24°        |           | F         | B      |                 |           |
|               | CRI>90/ 3000K | 24°        |           | On-Off    | Black  |                 |           |
|               | 940           | 48°        |           | P         |        |                 |           |
|               | CRI>90/ 4000K | 48°        |           | Phase Dim |        |                 |           |
|               |               | 60°        |           | A         |        |                 |           |
|               |               | 60°        |           | 1-10V Dim |        |                 |           |
|               |               |            |           | D         |        |                 |           |
|               |               |            |           | DALI Dim  |        |                 |           |


# FUSION G2 FF3 – Fixed LED Downlight

**NEW**

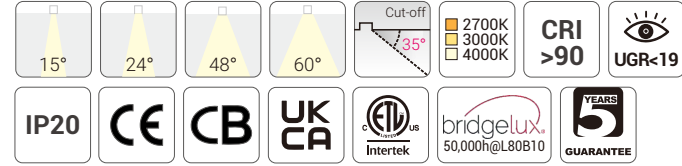


### Quick Info

- Ceiling Cut-out: 90x37mm
- Bridgelux LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



### Light Distribution

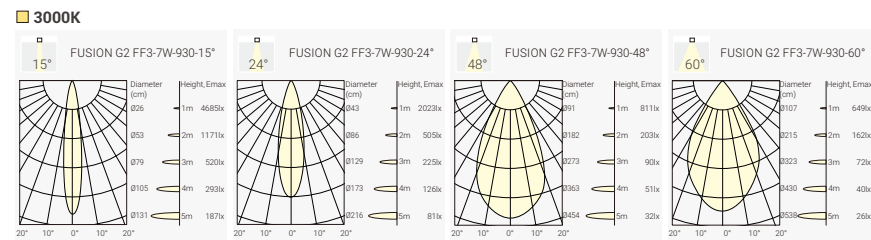

### Finish



### Order Info (FUSION G2 FF3 in White Trim & Black Reflector as an Example)

| LED Power | System Power | LED Voltage | LED Current | CRI   | CCT   | Beam | LED Output | System Output | Code              |
|-----------|--------------|-------------|-------------|-------|-------|------|------------|---------------|-------------------|
| 7W        | 9W           | 9V          | 700mA       | 80    | 2700K | 15°  | 700lm      | 560lm         | FF3G2-9271507N-WB |
|           |              |             |             |       |       | 24°  | 700lm      | 500lm         | FF3G2-9272407N-WB |
|           |              |             |             |       |       | 48°  | 700lm      | 500lm         | FF3G2-9274807N-WB |
|           |              |             |             |       |       | 60°  | 700lm      | 500lm         | FF3G2-9276007N-WB |
|           |              |             |             | 3000K |       | 15°  | 720lm      | 580lm         | FF3G2-9301507N-WB |
|           |              |             |             |       |       | 24°  | 720lm      | 520lm         | FF3G2-9302407N-WB |
|           |              |             |             |       |       | 48°  | 720lm      | 520lm         | FF3G2-9304807N-WB |
|           |              |             |             |       |       | 60°  | 720lm      | 520lm         | FF3G2-9306007N-WB |
|           |              |             |             | 4000K |       | 15°  | 780lm      | 600lm         | FF3G2-9401507N-WB |
|           |              |             |             |       |       | 24°  | 780lm      | 550lm         | FF3G2-9402407N-WB |
|           |              |             |             |       |       | 48°  | 780lm      | 550lm         | FF3G2-9404807N-WB |
|           |              |             |             |       |       | 60°  | 780lm      | 550lm         | FF3G2-9406007N-WB |


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

### Coding

| Model                  | CRI/ CCT             | Beam Angle | LED Power | Control        | Finish     | Reflector Color | Accessory |
|------------------------|----------------------|------------|-----------|----------------|------------|-----------------|-----------|
| FF3G2<br>FUSION G2 FF3 | 927<br>CRI>90/ 2700K | 15°        | 07<br>7W  | N<br>No Driver | W<br>White | B<br>Black      |           |
|                        | 930<br>CRI>90/ 3000K | 24°        |           | F<br>On-Off    | B<br>Black |                 |           |
|                        | 940<br>CRI>90/ 4000K | 48°<br>48° |           | P<br>Phase Dim |            |                 |           |
|                        |                      | 60°<br>60° |           | A<br>1-10V Dim |            |                 |           |
|                        |                      |            |           | D<br>DALI Dim  |            |                 |           |


# FUSION G2 FF5 – Fixed LED Downlight

**NEW**

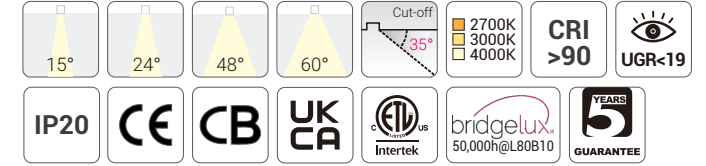


### Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim



### Light Distribution

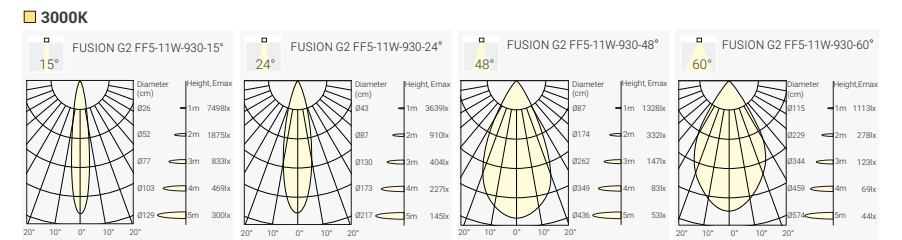

### Finish




### Order Info (FUSION G2 FF5 in White Trim & Black Reflector as an Example)

| LED Power | System Power | LED Voltage | LED Current | CRI   | CCT   | Beam | LED Output | System Output | Code              |
|-----------|--------------|-------------|-------------|-------|-------|------|------------|---------------|-------------------|
| 11W       | 13W          | 15V         | 700mA       | 90    | 2700K | 15°  | 1150lm     | 870lm         | FF5G2-9271511N-WB |
|           |              |             |             |       |       | 24°  | 1150lm     | 830lm         | FF5G2-9272411N-WB |
|           |              |             |             |       |       | 48°  | 1150lm     | 830lm         | FF5G2-9274811N-WB |
|           |              |             |             |       |       | 60°  | 1150lm     | 830lm         | FF5G2-9276011N-WB |
|           |              |             |             | 3000K |       | 15°  | 1200lm     | 900lm         | FF5G2-9301511N-WB |
|           |              |             |             |       |       | 24°  | 1200lm     | 850lm         | FF5G2-9302411N-WB |
|           |              |             |             |       |       | 48°  | 1200lm     | 850lm         | FF5G2-9304811N-WB |
|           |              |             |             |       |       | 60°  | 1200lm     | 850lm         | FF5G2-9306011N-WB |
|           |              |             |             | 4000K |       | 15°  | 1300lm     | 950lm         | FF5G2-9401511N-WB |
|           |              |             |             |       |       | 24°  | 1300lm     | 900lm         | FF5G2-9402411N-WB |
|           |              |             |             |       |       | 48°  | 1300lm     | 900lm         | FF5G2-9404811N-WB |
|           |              |             |             |       |       | 60°  | 1300lm     | 900lm         | FF5G2-9406011N-WB |

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

### Trimless Version


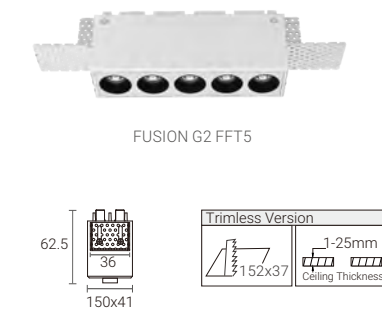


### Coding

| Model                  | CRI/ CCT             | Beam Angle | LED Power | Control        | Finish     | Reflector Color | Accessory |
|------------------------|----------------------|------------|-----------|----------------|------------|-----------------|-----------|
| FF5G2<br>FUSION G2 FF5 | 927<br>CRI>90/ 2700K | 15°        | 11<br>11W | N<br>No Driver | W<br>White | B<br>Black      |           |
| FF5G2<br>FUSION G2 FF5 | 930<br>CRI>90/ 3000K | 24°        |           | F<br>On-Off    | B<br>Black |                 |           |
|                        | 940<br>CRI>90/ 4000K | 48°<br>48° |           | P<br>Phase Dim |            |                 |           |
|                        |                      | 60°<br>60° |           | A<br>1-10V Dim |            |                 |           |
|                        |                      |            |           | D<br>DALI Dim  |            |                 |           |



# FUSION G2 FF10 – Fixed LED Downlight

**NEW**

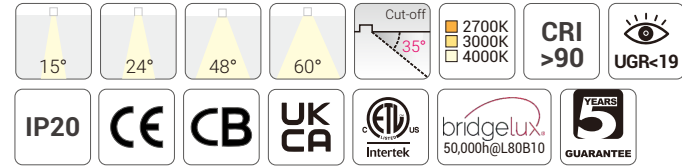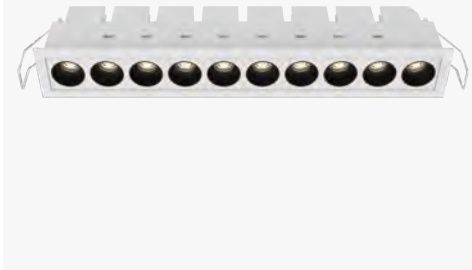

## Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- Bridgelux LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim



## Finish



White




Black


## Trimless Version



FUSION G2 FFT10



## Light Distribution

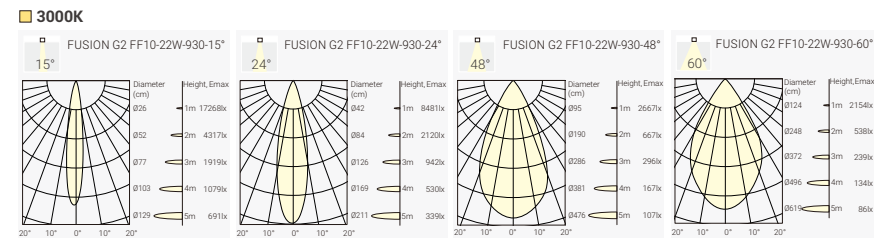

## Order Info (FUSION G2 FF10 in White Trim & Black Reflector as an Example)


| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam  | LED Output | System Output | Code               |                    |                    |     |        |        |                    |
|-----------|--------------|-------------|-------------|-----|-------|-------|------------|---------------|--------------------|--------------------|--------------------|-----|--------|--------|--------------------|
| 22W       | 24W          | 30V         | 700mA       | 90  | 2700K | 15°   | 2300lm     | 1850lm        | FF10G2-9271522N-WB |                    |                    |     |        |        |                    |
|           |              |             |             |     |       | 24°   | 2300lm     | 1800lm        | FF10G2-9272422N-WB |                    |                    |     |        |        |                    |
|           |              |             |             |     |       | 48°   | 2300lm     | 1800lm        | FF10G2-9274822N-WB |                    |                    |     |        |        |                    |
|           |              |             |             |     |       | 60°   | 2300lm     | 1850lm        | FF10G2-9276022N-WB |                    |                    |     |        |        |                    |
|           |              |             |             |     |       | 3000K | 15°        | 2450lm        | 1900lm             | FF10G2-9301522N-WB |                    |     |        |        |                    |
|           |              |             |             |     |       |       | 24°        | 2450lm        | 1850lm             | FF10G2-9302422N-WB |                    |     |        |        |                    |
|           |              |             |             |     |       |       | 48°        | 2450lm        | 1850lm             | FF10G2-9304822N-WB |                    |     |        |        |                    |
|           |              |             |             |     |       |       | 60°        | 2450lm        | 1900lm             | FF10G2-9306022N-WB |                    |     |        |        |                    |
|           |              |             |             |     |       |       | 4000K      | 15°           | 2600lm             | 2000lm             | FF10G2-9401522N-WB |     |        |        |                    |
|           |              |             |             |     |       |       |            | 24°           | 2600lm             | 1950lm             | FF10G2-9402422N-WB |     |        |        |                    |
|           |              |             |             |     |       |       |            |               |                    |                    |                    | 48° | 2600lm | 1950lm | FF10G2-9404822N-WB |
|           |              |             |             |     |       |       |            |               |                    |                    |                    | 60° | 2600lm | 2000lm | FF10G2-9406022N-WB |

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

## Coding


| Model           | CRI/ CCT      | Beam Angle | LED Power | Control   | Finish   | Reflector Color | Accessory |
|-----------------|---------------|------------|-----------|-----------|----------|-----------------|-----------|
| <b>FF10G2</b>   | <b>927</b>    | <b>15</b>  | <b>22</b> | <b>N</b>  | <b>W</b> | <b>B</b>        |           |
| FUSION G2 FF10  | CRI>90/ 2700K | 15°        | 22W       | No Driver | White    | Black           |           |
| <b>FFT10G2</b>  | <b>930</b>    | <b>24</b>  |           | <b>F</b>  | <b>B</b> |                 |           |
| FUSION G2 FFT10 | CRI>90/ 3000K | 24°        |           | On-Off    | Black    |                 |           |
|                 | <b>940</b>    | <b>48</b>  |           | <b>P</b>  |          |                 |           |
|                 | CRI>90/ 4000K | 48°        |           | Phase Dim |          |                 |           |
|                 |               | <b>60</b>  |           | <b>A</b>  |          |                 |           |
|                 |               | 60°        |           | 1-10V Dim |          |                 |           |
|                 |               |            |           | <b>D</b>  |          |                 |           |
|                 |               |            |           | DALI Dim  |          |                 |           |

Project: Eggen Restaurant, Norway

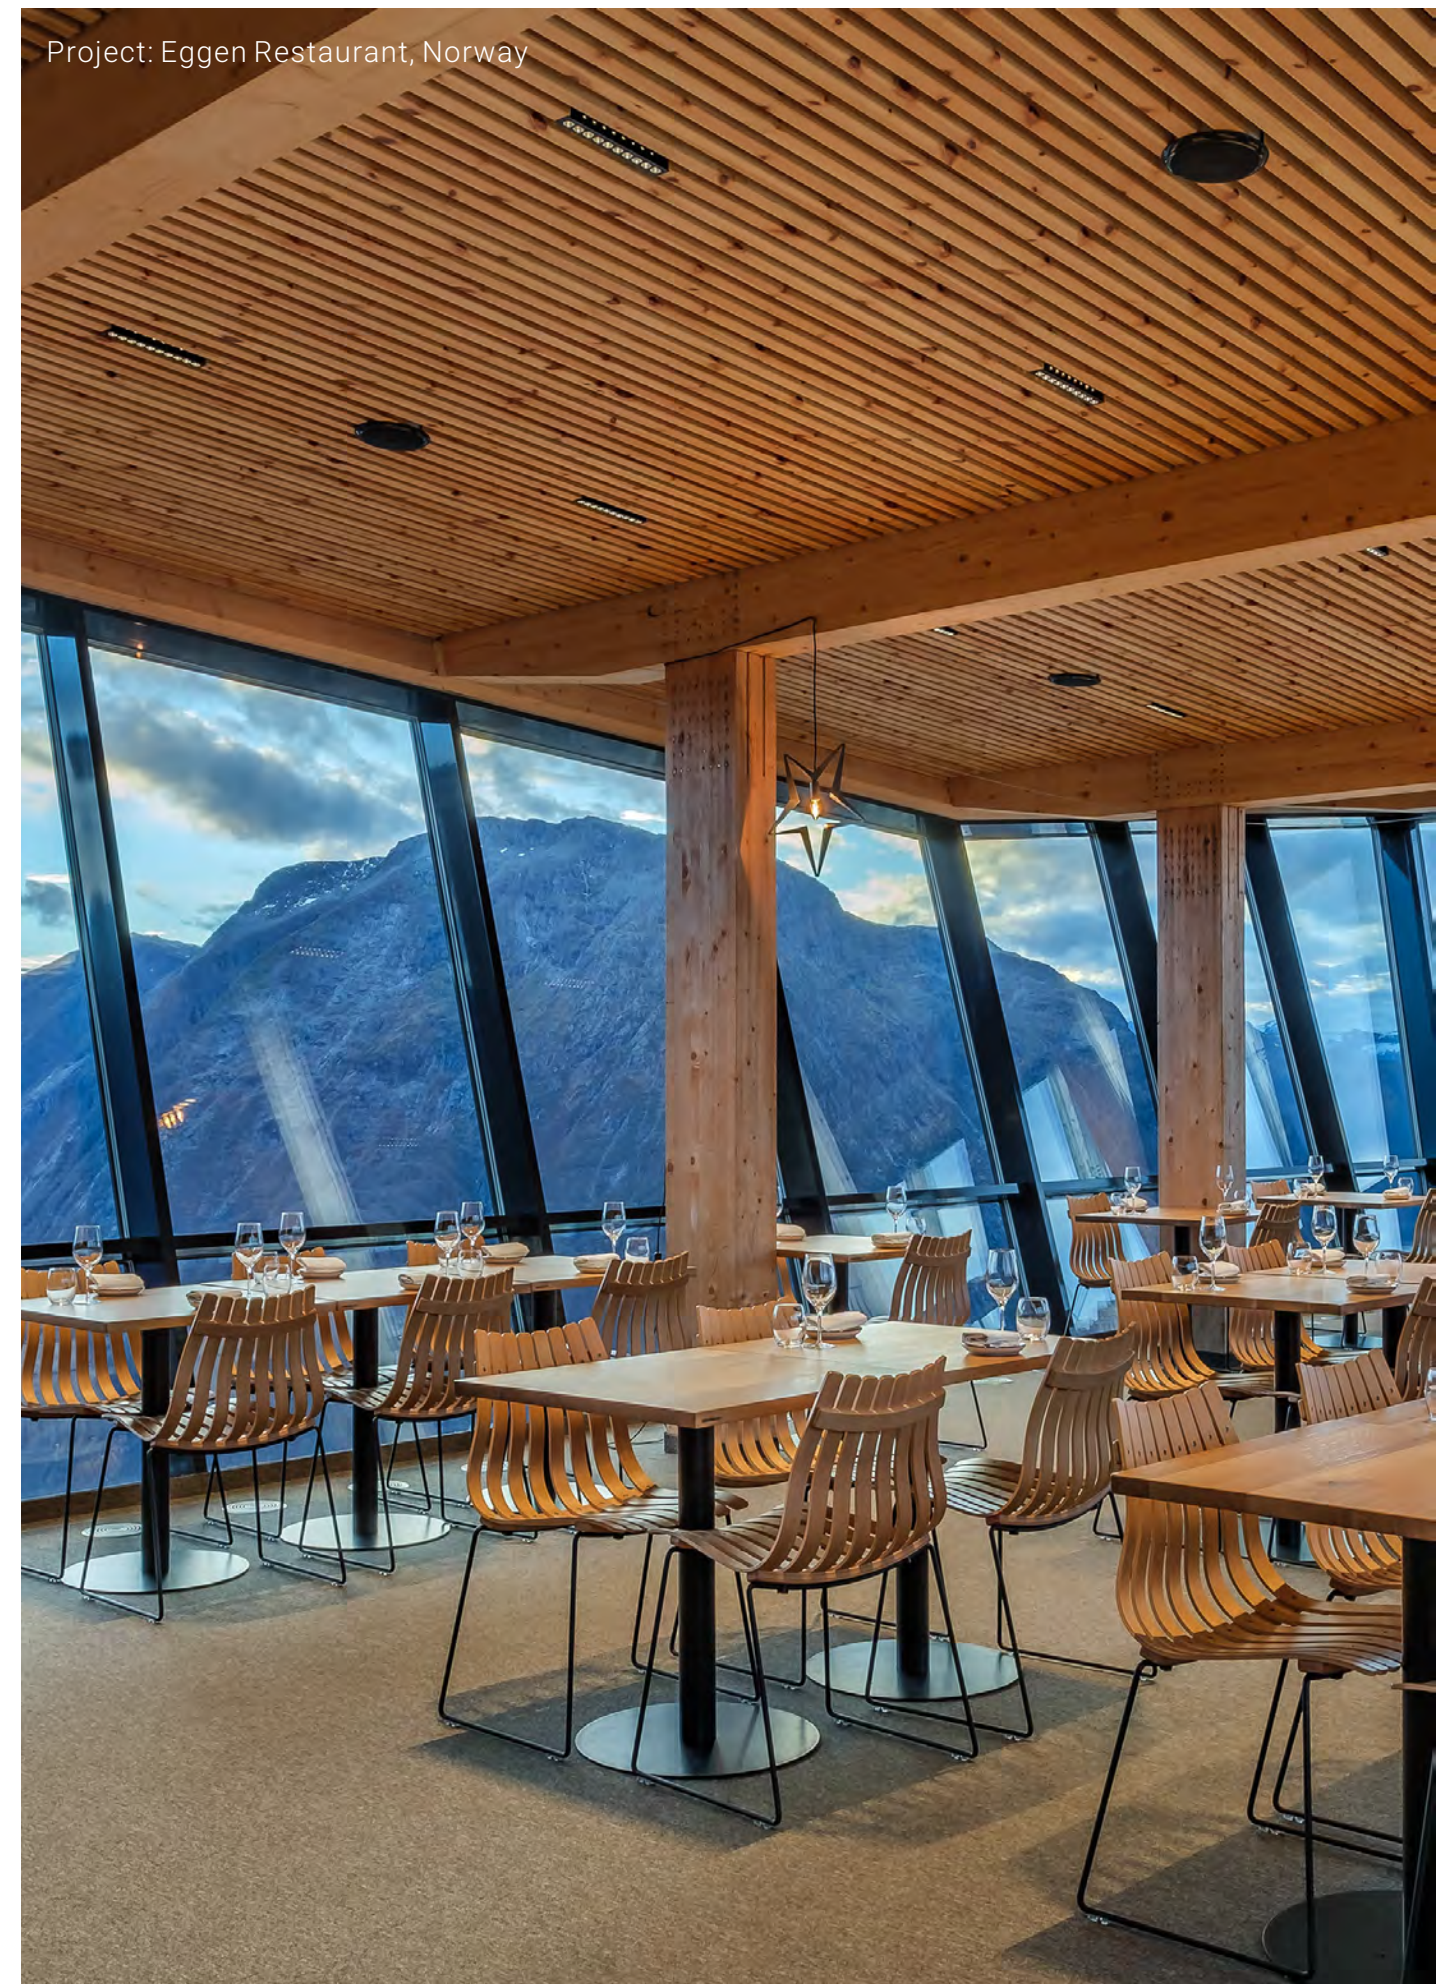



# FUSION G2 FA5 – Adjustable LED Downlight

**NEW**

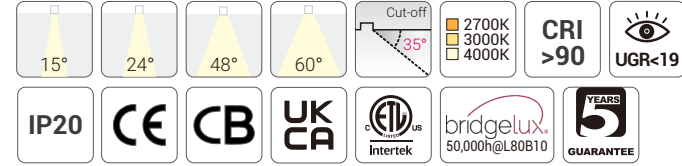


### Quick Info

- Ceiling Cut-out: 160x53mm for Trim Version
- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim



### Light Distribution

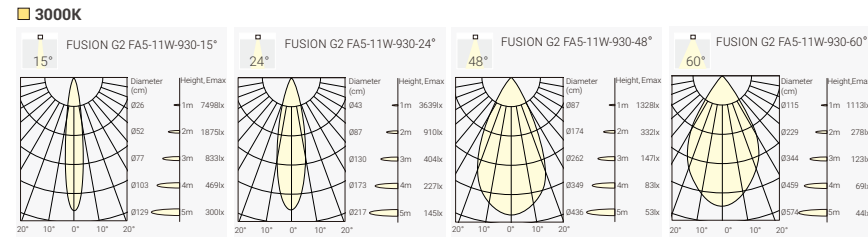

### Finish



### Order Info (FUSION G2 FA5 in White Trim & Black Reflector as an Example)

| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam | LED Output | System Output | Code              |
|-----------|--------------|-------------|-------------|-----|-------|------|------------|---------------|-------------------|
| 11W       | 13W          | 15V         | 700mA       | 90  | 2700K | 15°  | 1150lm     | 870lm         | FA5G2-9271511N-WB |
|           |              |             |             |     |       | 24°  | 1150lm     | 830lm         | FA5G2-9272411N-WB |
|           |              |             |             |     |       | 48°  | 1150lm     | 830lm         | FA5G2-9274811N-WB |
|           |              |             |             |     |       | 60°  | 1150lm     | 830lm         | FA5G2-9276011N-WB |
|           |              |             |             |     | 3000K | 15°  | 1200lm     | 900lm         | FA5G2-9301511N-WB |
|           |              |             |             |     |       | 24°  | 1200lm     | 850lm         | FA5G2-9302411N-WB |
|           |              |             |             |     |       | 48°  | 1200lm     | 850lm         | FA5G2-9304811N-WB |
|           |              |             |             |     |       | 60°  | 1200lm     | 850lm         | FA5G2-9306011N-WB |
|           |              |             |             |     | 4000K | 15°  | 1300lm     | 950lm         | FA5G2-9401511N-WB |
|           |              |             |             |     |       | 24°  | 1300lm     | 900lm         | FA5G2-9402411N-WB |
|           |              |             |             |     |       | 48°  | 1300lm     | 900lm         | FA5G2-9404811N-WB |
|           |              |             |             |     |       | 60°  | 1300lm     | 900lm         | FA5G2-9406011N-WB |



Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

### Coding

| Model               | CRI/ CCT          | Beam Angle | LED Power | Control | Finish | Reflector Color | Accessory |
|---------------------|-------------------|------------|-----------|---------|--------|-----------------|-----------|
| FA5G2 FUSION G2 FA5 | 927 CRI>90/ 2700K | 15°        | 11        | N       | W      | B               |           |
|                     | 930 CRI>90/ 3000K | 24°        |           | F       | B      |                 |           |
|                     | 940 CRI>90/ 4000K | 48°        |           | P       |        |                 |           |
|                     |                   | 60°        |           | A       |        |                 |           |
|                     |                   | 60°        |           | D       |        |                 |           |



# FUSION G2 FA10 – Adjustable LED Downlight

**NEW**

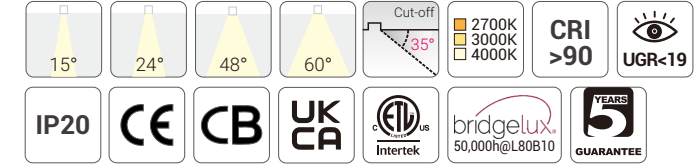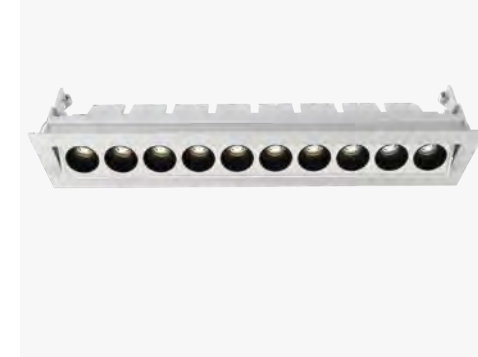


### Quick Info


- Ceiling Cut-out: 198x53mm for Trim Version
- Bridgelux LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim



### Light Distribution

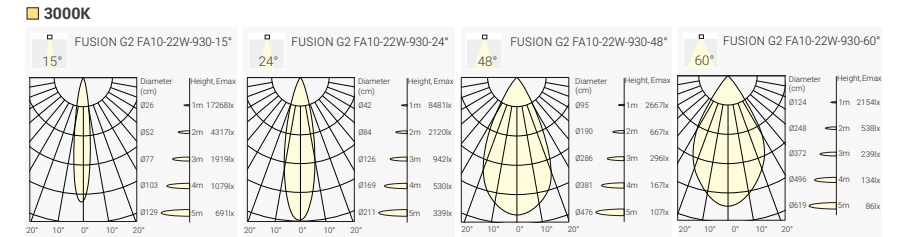

### Finish

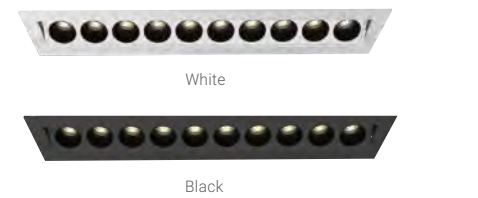

### Order Info (FUSION G2 FA10 in White Trim & Black Reflector as an Example)

| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam | LED Output | System Output | Code               |
|-----------|--------------|-------------|-------------|-----|-------|------|------------|---------------|--------------------|
| 22W       | 24W          | 30V         | 700mA       | 90  | 2700K | 15°  | 2300lm     | 1850lm        | FA10G2-9271522N-WB |
|           |              |             |             |     |       | 24°  | 2300lm     | 1800lm        | FA10G2-9272422N-WB |
|           |              |             |             |     |       | 48°  | 2300lm     | 1800lm        | FA10G2-9274822N-WB |
|           |              |             |             |     |       | 60°  | 2300lm     | 1850lm        | FA10G2-9276022N-WB |
|           |              |             |             |     | 3000K | 15°  | 2450lm     | 1900lm        | FA10G2-9301522N-WB |
|           |              |             |             |     |       | 24°  | 2450lm     | 1850lm        | FA10G2-9302422N-WB |
|           |              |             |             |     |       | 48°  | 2450lm     | 1850lm        | FA10G2-9304822N-WB |
|           |              |             |             |     |       | 60°  | 2450lm     | 1900lm        | FA10G2-9306022N-WB |
|           |              |             |             |     | 4000K | 15°  | 2600lm     | 2000lm        | FA10G2-9401522N-WB |
|           |              |             |             |     |       | 24°  | 2600lm     | 1950lm        | FA10G2-9402422N-WB |
|           |              |             |             |     |       | 48°  | 2600lm     | 1950lm        | FA10G2-9404822N-WB |
|           |              |             |             |     |       | 60°  | 2600lm     | 2000lm        | FA10G2-9406022N-WB |

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

### Coding

| Model                 | CRI/ CCT          | Beam Angle | LED Power | Control | Finish | Reflector Color | Accessory |
|-----------------------|-------------------|------------|-----------|---------|--------|-----------------|-----------|
| FA10G2 FUSION G2 FA10 | 927 CRI>90/ 2700K | 15°        | 22        | N       | W      | B               |           |
|                       | 930 CRI>90/ 3000K | 24°        |           | F       | B      |                 |           |
|                       | 940 CRI>90/ 4000K | 48°        |           | P       |        |                 |           |
|                       |                   | 60°        |           | A       |        |                 |           |
|                       |                   | 60°        |           | D       |        |                 |           |